




Din Rail Terminal Blocks

**DEGSON**

Device Connection Technology

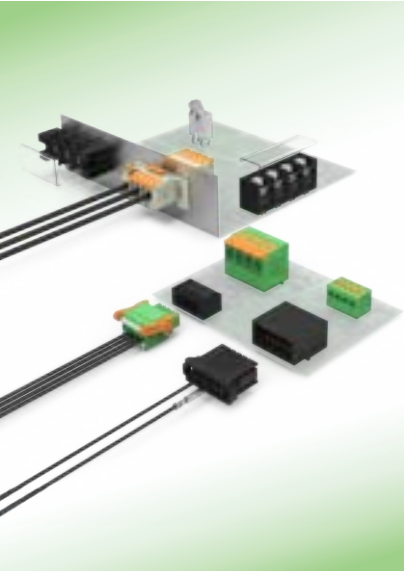

DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Circular Connectors



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Heavy Duty Connector



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

High Voltage & EV Charging System



NINGBO DEGSON EMOBILITY CONNECTIVITY CO.,LTD.
ISO9001 ISO14001 IATF16949

**DEGSON**

Interface Electronics



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Automation




DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**
DEGSON PTE. LTD.
Add: 2 Venture Drive#08-07 Vision
Exchange Singapore 608526
www.degson.com
The catalog is for reference purpose only and details are
base on company's specifications

Tel: +0065-69808477
E-mail: sale@degson.


Avantintie 7, FI-21420 Lieto
+358 2 4894 500
info@q-flex.fi | q-flex.fi

DRE 24-E01

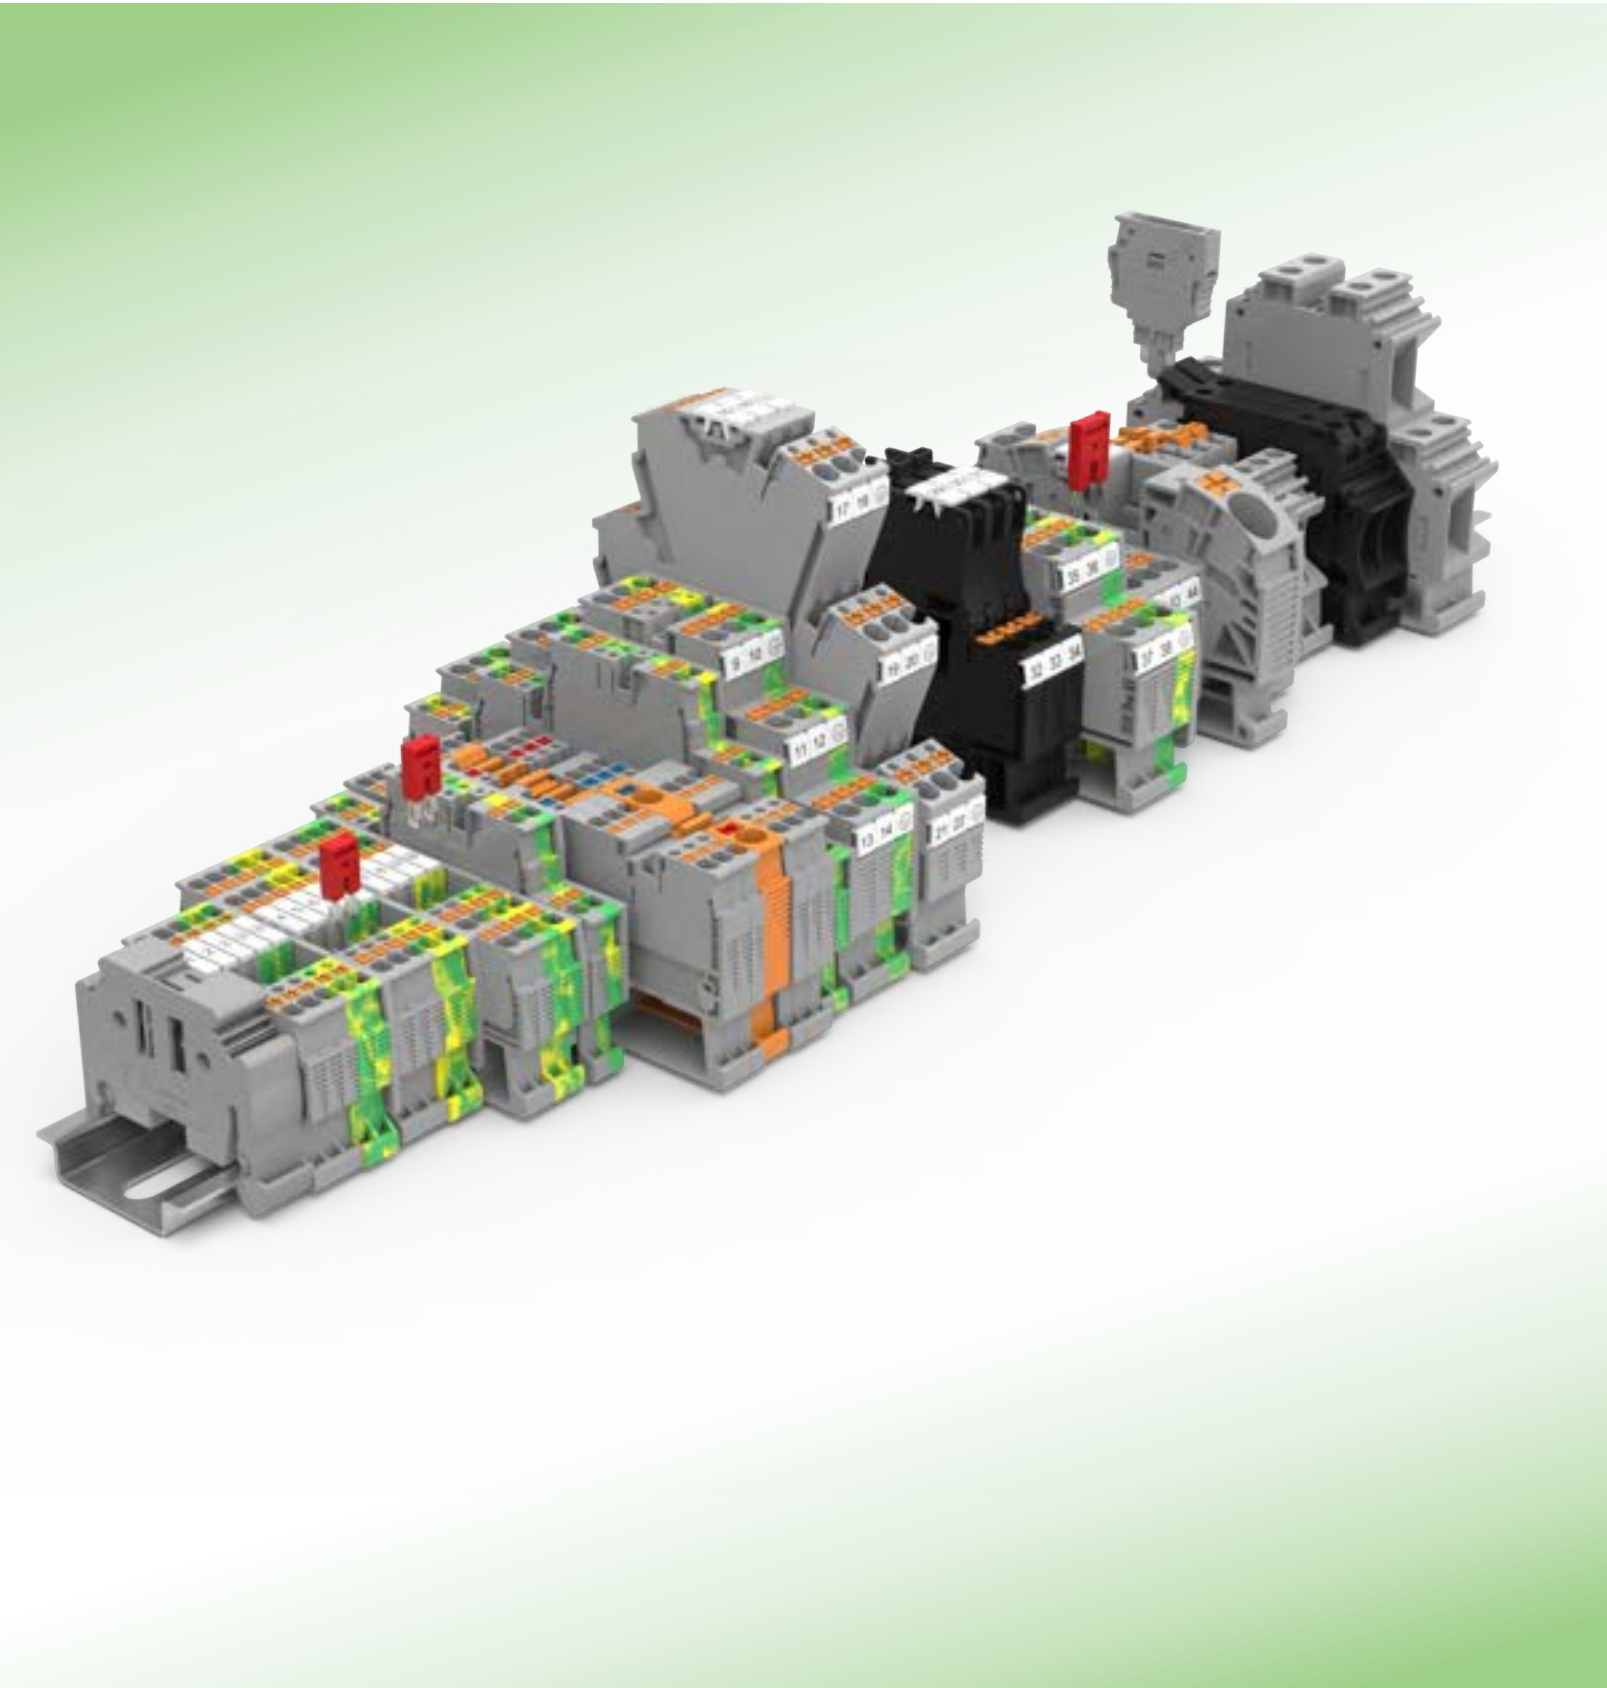

BRIEF INTRODUCTION

01

Founded in 1990, DEGSON is well known as a comprehensive industrial solution provider, with UL-CTDP, VDE-TDAP and CNAS approved laboratory. DEGSON has passed ISO9001, ISO14001, ISO45001, ISO80079-34, ISO/TS22163 and IATF16949 Management System, and is a national high-tech enterprise.

02

DEGSON is engaged in supplying highly reliable and durable products to serve global customers. The company has a market-leading capability of mould processing, automatic manufacturing and advanced testing. DEGSON has the complete engineering ability to support global customers with the professional customization solution and value-added service.

03

DEGSON products are widely recognized in China, the USA, Germany, the UK, Italy, Spain, Turkey, Japan, South Korea, Singapore, etc. totally hundred countries and regions. DEGSON supply high quality products and provide professional services globally in the industry sectors likely industrial automation, instrument, electric power, railway, marine and offshore, new energy, E-bike industrial elevator, lighting, security, machinery, etc. The company won the recognition from partners among Fortune 500 and industry leading enterprises.

04

Based on the core values of "Clients First, Win-win Strategy, Responsibility Integrity, Excellence Pursuit", DEGSON continuously integrates professional technical resources, R&D innovation, product manufacturing and technology application capabilities. Relying on global sales network, DEGSON aims to supply series of multiple varieties of high-quality products and services. We provide global customers with professional and quick connected application solutions, help customers continue to create value. DEGSON is making contributions to creating a smart and interconnected world.



DEGSON Global Production Base and R&D Center



China site



High-tech zone site



Vietnam site



Nanjing R&D Center



Luoyang R&D Center

DEGSON products are very popular more than 100 countries and areas.



UL-CTDP (USA), VDE-TDAP (Germany) and CNAS labs

Strategic cooperation with UL and VDE





1 | 2
3

① The general manager of UL global energy & technology division visit our company

② Sven Ohrke, President of VDE global services, comes to DEGSON to discuss strategic cooperation

③ VDE Laboratory Accreditation: In July 2010, VDE Issued the "VDE Authorized Laboratory" Certificate to DEGSON' s laboratory.

UL laboratory accreditation: UL formally issued "UL WTD" certification to DEGSON in March 2013.

On April, 2016, UL-CTDP.

On December, 2016, VDE-TDAP.

On January, 2017, Pass IRIS system audit.

CONTENTS

Din rail terminal blocks series

DS Push-in series..... 01-06

WS Spring-cage series..... 07-11

STB Spring-cage series..... 12-13

DC Steel screw series..... 14-17

PC Brass screw series 18-21

DHV High-voltage screw series..... 22-23

BS Bolt connection series 24-25

Accessories & marking system

Marking System 26-28

Terminal blocks marker28-29




ISO9001 ISO14001 IATF16949 ISO/TS 22163 UL - CTDP VDE - TDAP




CNAS certificate EX certificate UL Certificates:10,Covering 4000+Products VDE Certificates:178,Covering 3000+Products TUV certificate European invention patent

DS-Push-in Connection Terminal Blocks

- Adopt Push-in connection technology, no tools for wiring, high efficiency and quick connection
- Double channel bridge position, easy to realize potential distribution
- Standardized test hole, convenient and fast circuit test
- Pluggable bridges and rich accessory systems perfectly solve the application needs of the user end

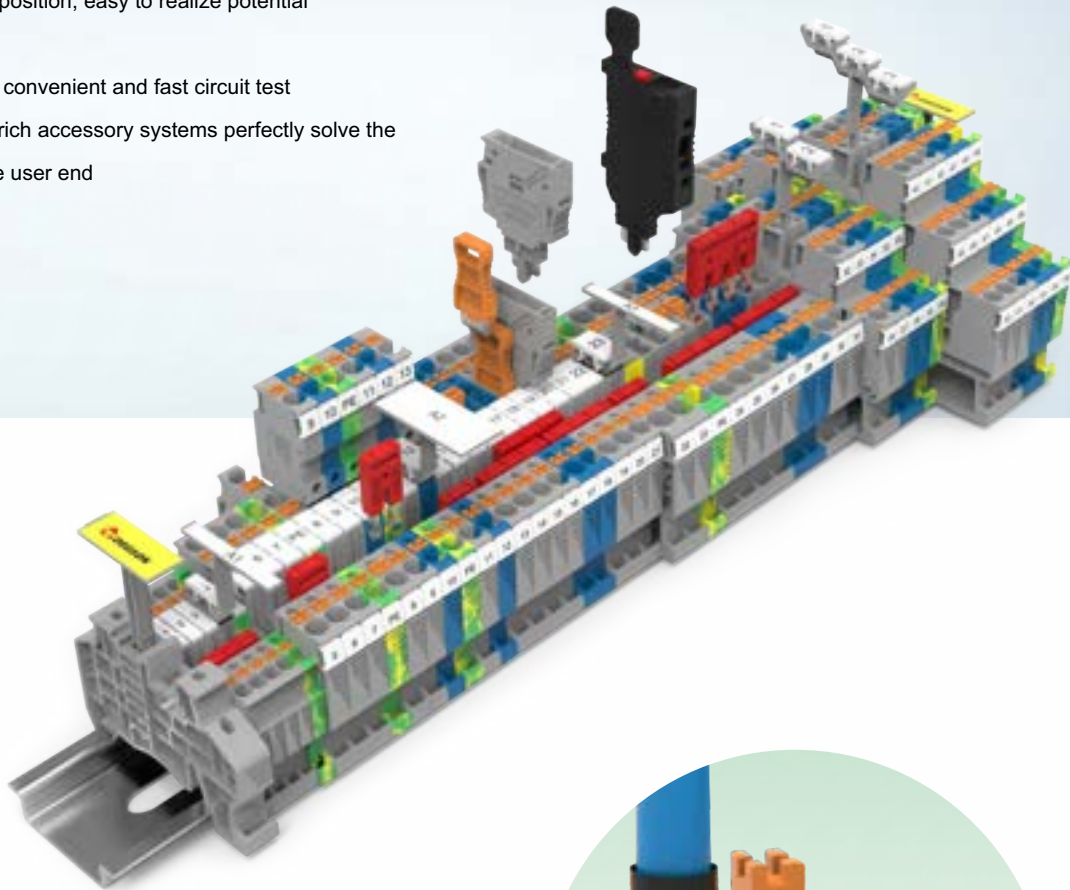

DS push-in connection technology terminal blocks,imported stainless steel spring, unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40°C to 105°C, and all DS series of din rail products are in line with UL94 V0 flame retardant grade. The push-in spring structure design greatly improves the connection efficiency. Solid wire or stranded wire processed by terminals can be inserted directly without tools.

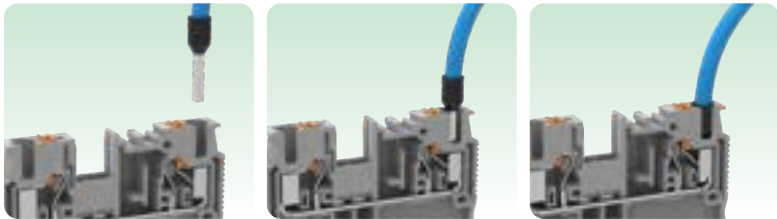


DS1.5 CE 500V/17.5A 0.14-1.5mm² UL 300V/15A 26-14AWG T/W/End plate 3.5/45/1.5mm	DS1.5-PE CE — 0.14-1.5mm² UL — 26-14AWG T/W/End plate 3.5/45/1.5mm	DS1.5-TW CE 500V/17.5A 0.14-1.5mm² UL 300V/15A 26-14AWG T/W/End plate 3.5/54/1.5mm	DS1.5-TW-PE CE — 0.14-1.5mm² UL — 26-14AWG T/W/End plate 3.5/54/1.5mm	DS1.5-QU CE 500V/17.5A 0.14-1.5mm² UL 300V/15A 26-14AWG T/W/End plate 3.5/63.2/1.5mm
DS1.5-QU-PE CE — 0.14-1.5mm² UL — 26-14AWG T/W/End plate 3.5/63.2/1.5mm	DSKK1.5 CE 500V/16A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/68.2/1.5mm	DSKK1.5-PV CE 500V/16A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/68.2/1.5mm	DSKK1.5-PE CE — 0.14-1.5mm² UL — 26-16AWG T/W/End plate 3.5/68.2/1.5mm	DS1.5-3L CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm
DS1.5-3L-PV CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm	DS1.5-3L-PE CE — 0.14-1.5mm² UL — 26-16AWG T/W/End plate 3.5/102/1.5mm	DS1.5-3L-L/L/PE CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm	DS1.5-3L-L/N/PE CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm	DS2.5 CE 800V/24A 0.14-4mm² UL 600V/20A 26-12AWG T/W/End plate 5.2/48.6/1.5mm
DS2.5-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/48.6/1.5mm	DS2.5-TW CE 800V/24A 0.14-4mm² UL 600V/20A 26-12AWG T/W/End plate 5.2/60.5/1.5mm	DS2.5-TW-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/60.5/1.5mm	DS2.5-QU CE 800V/24A 0.14-4mm² UL 600V/20A 26-12AWG T/W/End plate 5.2/72.2/1.5mm	DS2.5-QU-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/72.2/1.5mm
DSKK2.5 CE 500V/22A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/68.2/1.5mm	DSKK2.5-PV CE 500V/22A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/68.2/1.5mm	DSKK2.5-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/68.2/1.5mm	DS2.5-3L CE 500V/20A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/102/1.5mm	DS2.5-3L-PV CE 500V/20A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/102/1.5mm




DS2.5-3L-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/102/1.5mm	



DS2.5-3L-L/L/PE

CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/102/1.5mm	



DS2.5-3L-L/N/PE

CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/102/1.5mm	



DS2.5-PE/3L

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate	5.2/99.4/1.5mm	



DS4

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	



DS4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	



DS4-TW

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate	6.2/66.5/1.5mm	



DS4-TW-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/66.5/1.5mm	



DS4-QU

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate	6.2/77/1.5mm	



DS4-QU-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/77/1.5mm	



DSKK 4

CE	500V/32A	0.2-6mm ²
UL	300V/28A	24-10AWG
T/W/End plate	6.2/83.5/1.5mm	



DSKK4-PV

CE	500V/32A	0.2-6mm ²
UL	300V/28A	24-10AWG
T/W/End plate	6.2/83.5/1.5mm	




DSKK4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/83.5/1.5mm	



DS6

CE	1000V/41A	0.5-10mm ²
UL	600V/50A	20-8AWG
T/W/End plate	8.2/58/1.5mm	



DS6-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate	8.2/58/1.5mm	



DS6-TW

CE	1000V/41A	0.5-10mm ²
UL	600V/40A	20-8AWG
T/W/End plate	8.2/74.2/1.5mm	



DS6-TW-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate	8.2/74.2/1.5mm	



DS6-QU

CE	1000V/41A	0.5-10mm ²
UL	600V/40A	20-8AWG
T/W/End plate	8.2/90.4/1.5mm	



DS6-QU-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate	8.2/90.4/1.5mm	



DS10

CE	1000V/57A	0.5-16mm ²
UL	600V/60A	20-6AWG
T/W/End plate	10.2/67.7/1.5mm	



DS10-PE

CE	—	0.5-16mm ²
UL	—	20-6AWG
T/W/End plate	10.2/67.7/1.5mm	




DS10-TW

CE	1000V/57A	0.5-16mm ²
UL	600V/60A	20-6AWG
T/W/End plate	10.2/88.9/1.5mm	



DS10-TW-PE

CE	—	0.5-16mm ²
UL	—	20-6AWG
T/W/End plate	10.2/88.9/1.5mm	



DS16

CE	1000V/76A	0.5-25mm ²
UL	600V/85A	20-4AWG
T/W/End plate	12.2/75.4/1.5mm	




DS16-PE

CE	—	0.5-25mm ²
UL	—	20-4AWG
T/W/End plate	12.2/75.4/1.5mm	



DS16-TW

CE	1000V/76A	0.5-25mm ²
UL	600V/85A	20-4AWG
T/W/End plate	12.2/100.4/1.5mm	



DS16-TW-PE

CE	—	0.5-25mm ²
UL	—	20-4AWG
T/W/End plate	12.2/100.4/1.5mm	



DS4-HE

CE	400V/6.3A	0.2-6mm ²
UL	300V/6.3A	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	



DS4-HE-LD24

CE	24V/6.3A	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	



DS4-HE-LD60

CE	60V/6.3A	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	




DS4-HE-LD250

CE	250V/6.3A	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	



DS2.5-MT

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/62/1.5mm	



DS2.5-TG

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/62/1.5mm	



DS2.5-TW-MT

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/73.7/1.5mm	



DS2.5-TW-TG

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/73.7/1.5mm	



DS2.5-QU-MT

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/84/1.5mm	



DS2.5-QU-TG

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/84/1.5mm	



DS4-MT

CE	500V/20A	0.2-6mm ²
UL	300V/20A	26-10AWG
T/W/End plate	6.2/55.6/1.5mm	



DS4-TG

CE	500V/20A	0.2-6mm ²
UL	300V/20A	26-10AWG
T/W/End plate	6.2/55.6/1.5mm	



DS6-MT

CE	500V/20A	0.5-10mm ²
UL	300V/20A	20-8AWG
T/W/End plate	8.2/74.2/-mm	



DS6-TG

CE	500V/20A	0.5-10mm ²
UL	300V/20A	20-8AWG
T/W/End plate	8.2/74.2/-mm	



DS2.5/1P

CE	500V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate	5.2/48.6/1.5mm	



DS2.5/1P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/48.6/1.5mm	



DS2.5/2P

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/48.6/1.5mm	



DS2.5/2P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/48.6/1.5mm	



DS2.5-TW/1P

CE	500V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate	5.2/60.5/1.5mm	



DS2.5-TW/1P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/60.5/1.5mm	



DS2.5-QU/2P

CE	500V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate	5.2/81.1/1.5mm	



DS2.5-QU/2P-PE

CE	—	0.1
----	---	-----



DS2.5-QU/4P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/89.6/1.5mm		



DSKK2.5/2P

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/73.5/1.5mm		



DSKK2.5/2P-PV

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/73.5/1.5mm		



DSKK2.5/2P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/73.5/1.5mm		



DS4/1P

CE	800V/32A	0.2-6mm ²
UL	600V/28A	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		



DS4/1P-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		



DSIO1.5/3

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/74.4/2.2mm		



DSIO1.5/3-PE

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/74.4/2.2mm		



DSIO1.5/4

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate 3.5/90.9/2.2mm		



DSIO1.5/4-PE

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate 3.5/90.9/2.2mm		



DSIO-IN 2.5/3 OG

CE	250V/20A	0.2-4mm ²
UL	300V/10A	26-12AWG
T/W/End plate 7/74.4/2.2mm		



DSIO-IN 2.5/4-PE OG

CE	250V/20A	0.2-4mm ²
UL	300V/10A	26-12AWG
T/W/End plate 7/90.9/2.2mm		



DS2.5-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/48.6/1.5mm		



DS2.5-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/48.6/1.5mm		



DS2.5-TW-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/60.5/1.5mm		



DS2.5-TW-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/60.5/1.5mm		



DS2.5-QU-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/72.2/1.5mm		



DS2.5-QU-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/72.2/1.5mm		



DSV2.5

CE	600V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/50.8/1.5mm		



DSV2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/50.8/1.5mm		



DSKKS2.5

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/82/1.5mm		



DSKKS2.5-PV

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/82/1.5mm		



DSKKS2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/82/1.5mm		



DSKKS4

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/92/1.5mm		



DSKKS4-PV

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/92/1.5mm		



DSKKS4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/92/1.5mm		



DSHV2.5-2000

CE	2000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 6.2/57/1.5mm		



DSS2.5-3L-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DSS2.5-3L-PV-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DSS2.5-3L-PE-01A(H)

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DSS2.5-3L-L/L/PE-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DSS2.5-3L-L/N/PE-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DFBXX-3.5

DFBXX-3.5 → DS1.5 Series		
XX: NO. OF POLE		
2-10POLES, 20POLES		



DFBXX-5.2

DFBXX-5.2 → DS2.5 Series		
XX: NO. OF POLE		
2-10POLES, 20POLES		



DFBXX-6.2

DFBXX-6.2 → DS4 Series		
XX: NO. OF POLE		
2-10POLES		



DFBXX-8.2

DFBXX-8.2 → DS6 SERIES		
XX: NO. OF POLE		
2-10POLES		




DFBXX-10.2

DFBXX-10.2 → DS10 SERIES		
XX: NO. OF POLE		
2-10POLES		



DFBXX-12.2

DFBXX-12.2 → DS16 Series		
XX: NO. OF POLE		
2POLES		



DS-CO

DS-CO → DS2.5-TG DS4-TG		
DS6-TG DC4-TG		



DS-DI

DS-DI → DS2.5-TG DS4-TG		
DS6-TG DC4-TG		



DS-FU5

DS-FU5 → DS2.5/DS4/DS6/ DC4-TG		
CE	400V/6.3A	UL 300V/10A



DS-FU5-LD24

DS-FU5-LD24 → DS2.5/DS4/DS6/ DC4-TG		
CE	24V/6.3A	UL —



DSP2.5-H

DSP2.5-H →		
DS2.5/1P	DS2.5/1P-PE	
DS2.5/2P	DS2.5/2P-PE	
DS2.5-TW/1P	DS2.5-TW/1P-PE	
In addition, it can also be adapted to various types of DS2.5 series plug-in terminal blocks		





DSP2.5-C

DSP2.5-C →	
DS2.5/1P	DS2.5/1P-PE
DS2.5/2P	DS2.5/2P-PE
DS2.5-TW/1P	DS2.5-TW/1P-P

In addition, it can also be adapted to various types of DS2.5 series plug-in terminal block










WS-Spring-cage Connection Terminal Blocks


- Proven Spring-cage connection technology with excellent seismic performance
- The spring compression force is constant, and the connection is stable and reliable.
- Pluggable bridge, high circuit connection efficiency
- Large area identification space, clear wiring

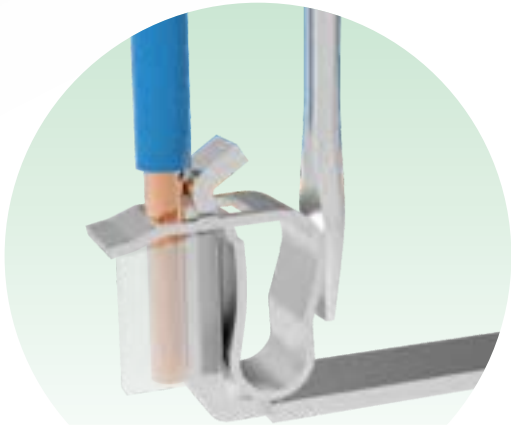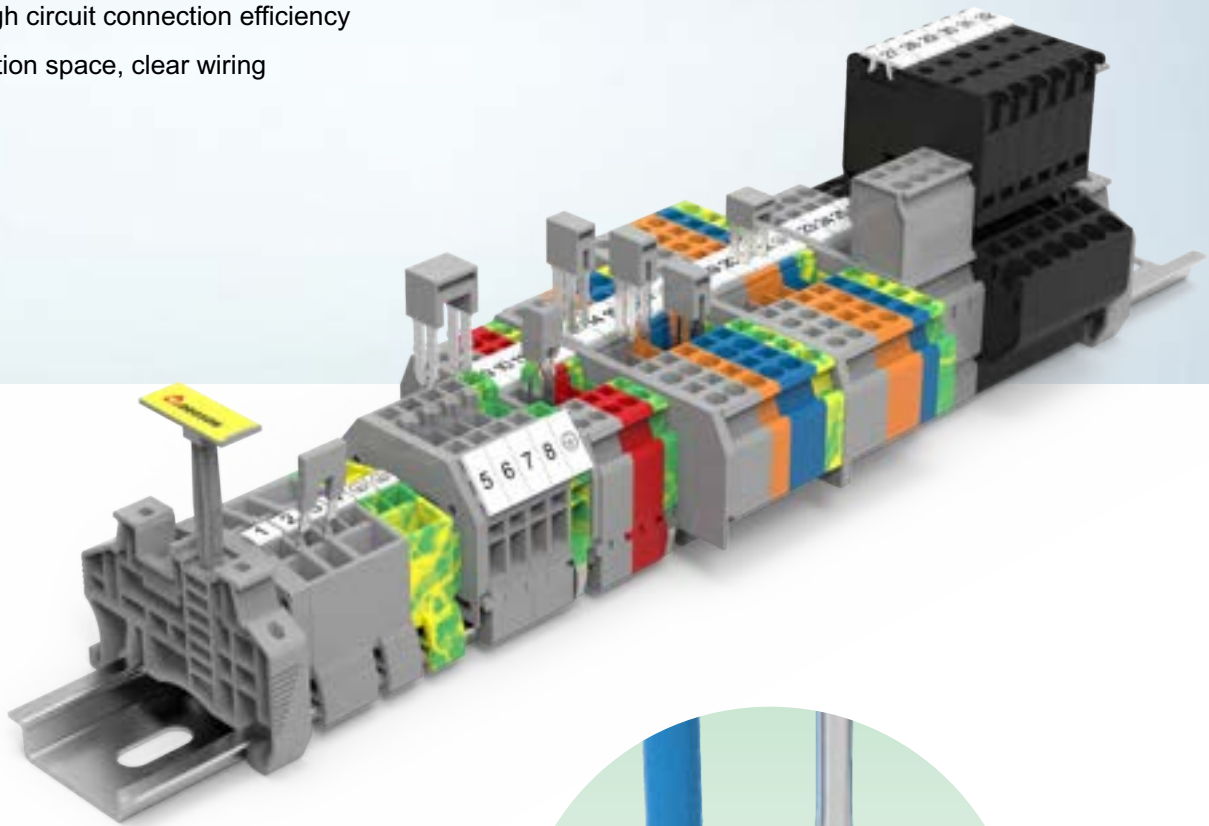

The WS spring-cage connection technology terminal block adopts imported stainless steel spring, and the unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66's plastic parts can meet the working environment of -40°C to 105°C, and all WS series of din rail products are in line with UL94 V0 flame retardant grade. The spring-cage structure design makes the wiring efficiency higher than screw type. People just use a slotted screwdriver to connect solid wire or stranded wire processed by terminals.



				
WS1.5 CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/51.8/2.5mm	WS1.5-PE CE — 0.2-1.5mm² UL — 28-16AWG T/W/End plate 4/51.8/2.5mm	WS1.5-TW CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/62.5/2.5mm	WS1.5-TW-PE CE — 0.2-1.5mm² UL — 28-16AWG T/W/End plate 4/62.5/2.5mm	WS1.5-QU CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/73/2.5mm
				
WS1.5-QU-100A(H) CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/68/2.5mm	WS1.5-QU-PE CE — 0.2-1.5mm² UL — 28-16AWG T/W/End plate 4/73/2.5mm	WS1.5-DB CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 5/25/2.5mm	WS1.5-DB-11A(H) CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 5/25/2.5mm	WS1.5T-DB CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 8/25/2.5mm
				
WS1.5T-DB-11A(H) CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 4/25/2.5mm	WS2.5 CE 800V/24A 0.2-2.5mm² UL 600V/15A 28-14AWG T/W/End plate 4/53/2.5mm	WS2.5-PE CE — 0.2-2.5mm² UL — 28-14AWG T/W/End plate 5/53/2.5mm	WS2.5-TW CE 800V/24A 0.2-2.5mm² UL 600V/15A 28-14AWG T/W/End plate 5/64.2/2.5mm	WS2.5-TW-PE CE — 0.2-2.5mm² UL — 28-14AWG T/W/End plate 5/64.2/2.5mm
				
WS2.5-QU CE 800V/24A 0.2-2.5mm² UL 600V/15A 28-14AWG T/W/End plate 5/75.5/2.5mm	WS2.5-QU-PE CE — 0.2-2.5mm² UL — 28-14AWG T/W/End plate 5/75.5/2.5mm	WS2.5-DB CE 800V/24A 0.2-2.5mm² UL 300V/15A 28-14AWG T/W/End plate 6/28/2.5mm	WS2.5-DB-11A(H) CE 800V/24A 0.2-2.5mm² UL 300V/15A 28-14AWG T/W/End plate 6/28/2.5mm	WS2.5-DIN15 CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 6/32/4.0mm
				
WS2.5-DIN15-PE CE — 0.2-2.5mm² UL — 28-12AWG T/W/End plate 6/32/4.0mm	WS2.5-DIN35 CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 6/32/4.0mm	WS2.5-MID-CO CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 6/32/4.0mm	WS2.5-END-CO CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 12/32/4.0mm	WS2.5T-DB CE 800V/24A 0.2-2.5mm² UL 300V/15A 28-14AWG T/W/End plate 10/28/2.5mm



WS2.5T-DB-11A(H)

CE	800V/24A	0.2-2.5mm ²
UL	300V/15A	28-14AWG
T/W/End plate 10/28/2.5mm		



WS2.5T-DIN15

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		




WS2.5T-DIN35

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		



WS2.5T-MID-CO

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		



WS2.5T-END-CO

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		




WS4

CE	800V/32A	0.2-4mm ²
UL	600V/15A	28-12AWG
T/W/End plate 6/60.4/2.5mm		




WS4-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/60.4/2.5mm		



WS4-DB

CE	630V/32A	0.2-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 7/33.4/2.5mm		



WS4-TW

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/73.5/2.5mm		



WS4-TW-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/73.5/2.5mm		




WS4-QU

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/86.2/2.5mm		



WS4-QU-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/86.2/2.5mm		



WS4T-DB

CE	800V/32A	0.2-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 12/33.4/2.5mm		



WS6

CE	800V/41A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/74.5/2.5mm		



WS6-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/74.5/2.5mm		



WS6-TW

CE	800V/41A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/93/2.5mm		




WS6-TW-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/93/2.5mm		



WS10

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/77.5/2.5mm		



WS10-PE

CE	—	0.2-10mm ²
UL	—	24-8AWG
T/W/End plate 10/77.5/2.5mm		



WS10-TW

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/97.5/2.5mm		




WS10-TW-PE

CE	—	0.2-10mm ²
UL	—	24-8AWG
T/W/End plate 10/97.5/2.5mm		



WS16

CE	800V/76A	0.2-16mm ²
UL	600V/66A	24-6AWG
T/W/End plate 12/94.5/2.5mm		




WS16-PE

CE	—	0.2-16mm ²
UL	—	24-6AWG
T/W/End plate 12/94.5/2.5mm		




WS16-TW

CE	800V/76A	0.2-16mm ²
UL	600V/66A	24-6AWG
T/W/End plate 12/104.5/2.5mm		




WS16-TW-PE

CE	—	0.2-16mm ²
UL	—	24-6AWG
T/W/End plate 12/104.5/2.5mm		



WS35

CE	1000V/125A	0.5-35mm ²
UL	600V/115A	24-2AWG
T/W/End plate 16/99.9/-mm		



WS35-PE

CE	—	0.5-35mm ²
UL	—	24-2AWG
T/W/End plate 16/99.9/-mm		



WS2.5-TW-TA

CE	800V/24A	0.2-2.5mm ²
UL	600V/15A	28-14AWG
T/W/End plate 5/50.5/2.5mm		



WS2.5-TW-TA-PE

CE	—	0.2-2.5mm ²
UL	—	28-14AWG
T/W/End plate 5/50.5/2.5mm		



WSF4-TA

CE	400V/6.3A	0.5-4mm ²
UL	300V/6.3A	28-10AWG
T/W/End plate 6/60/-mm		



WSF4-TA-10A(H)

CE	250V/10A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		



WSF4-TA-LD24

CE	24V/6.3A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		



WSF4-TA-LD60

CE	60V/6.3A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		




WSF4-TA-LD250

CE	250V/6.3A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		



WS2.5-QU-LD-L-R

CE	250V/0.5A	0.2-2.5mm ²
UL	(Reverse breakdown voltage 1KV)	28-14AWG
T/W/End plate 5/75.5/2.5mm		



WS2.5-QU-LD-R-L

CE	250V/0.5A	0.2-2.5mm ²
UL	(Reverse breakdown voltage 1KV)	28-14AWG
T/W/End plate 5/75.5/2.5mm		




WS1.5-SD

CE	800V/18A	0.2-1.5mm ²
UL	600V/10A	28-16AWG
T/W/End plate 4/42.5/2.3mm		




WS2.5-SD

CE	800V/24A	0.2-2.5mm ²
UL	600V/15A	28-12AWG
T/W/End plate 5/42.5/2.5mm		




WS2.5-SD-PE

CE	—	0.2-2.5mm ²
UL	—	28-12AWG
T/W/End plate 5/42.5/2.5mm		



WS4-SD

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/41.8/2.5mm		




WS6-SD

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/46.5/2.5mm		



WS6-SD-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/46.5/2.5mm		



WS10-SD

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/52/2.5mm		



WS10-SD-PE

CE	—	0.2-10mm ²
UL	—	24-8AWG
T/W/End plate 10/52/2.5mm		





WS2.5P

CE	500V/22A	0.2-2.5mm ²
UL	300V/15A	28-14AWG
T/W/End plate	5/53/2.5mm	



WS2.5P-PE

CE	—	0.2-2.5mm ²
UL	—	28-14AWG
T/W/End plate	5/53/2.5mm	



WFA1.5

WS1.5 series bridge -2-bit stackable Bridge



WFA2.5

WS 2.5 series bridge -2-bit stackable Bridge



WFA4

Ws4 series bridge -2-bit stackable Bridge



WFA6

Ws6 series bridge -2-bit stackable Bridge



WFA10

Ws10 series bridge -2-bit stackable Bridge



WFA16

Ws16 series bridge -2-bit stackable Bridge



WFB1.5

WS1.5 series jumper - Bay 1-bit jumper



WFB2.5

WS2.5 series jumper - Bay 1-bit jumper



WFB4

Ws4 series jumper - Bay 1-bit jumper



WFB6

Ws6 series jumper - Bay 1-bit jumper



WFB10

Ws10 series jumper - Bay 1-bit jumper




WFB16

Ws16 series jumper - Bay 1-bit jumper



WFC2.5-2, WFC2.5-3, WFC2.5-4
WFC2.5-5, WFC2.5-6, WFC2.5-7
WFC2.5-8

WS2.5 series jumper - Interval 1-7 position jumper




WFE-2.5


WS2.5 series side plug bridge
-WS2.5-DIN15, WS2.5-DIN35,
-WS2.5-MID-CO, WS2.5-MID-CO,
-WS2.5-DB, WS2.5-DB-11A(H)


STB Spring-cage Terminal Blocks

- Proven spring-cage connection technology with excellent seismic performance.
- With large wiring capacity, it can be connected to rated conductors with or without ferrules.
- Double-channel bridge wells, with a 2-20 bit bridge, can flexibly distribute potential.
- Clear front identification and easy identification of the marked area.

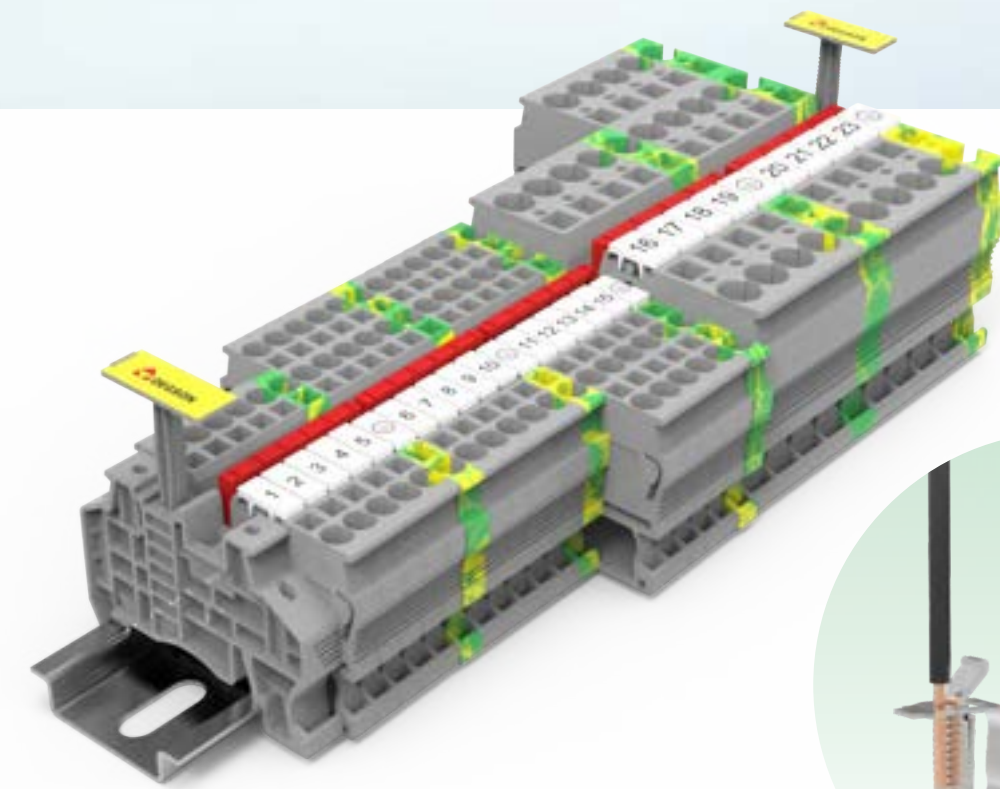


STB spring-cage terminal blocks are made of high-quality alloy structure, providing reliable and durable connection products. It is possible to connect wires that have not been pretreated. The wiring capacity is large, and the wires with or without a cold pressure head of the rated wire diameter can be accessed. At the same time, the proven pull-back connection technology has excellent seismic performance and excellent performance in high vibration situations such as railways, ships, and equipment manufacturing. The plastic raw materials of PA66 UL94 VO can meet the working environment of - 40 °C to 105 °C.

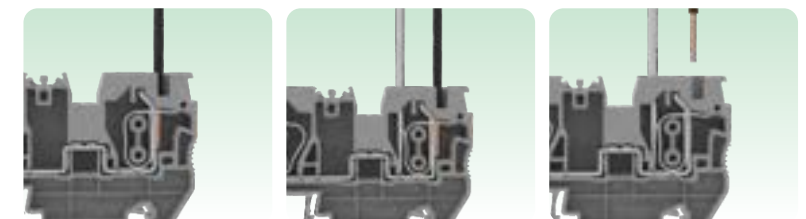




STB2.5

CE	800V/24A	0.08-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate	5.2/50.7/1.5mm	



STB2.5-PE

CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate	5.2/50.7/1.5mm	




STB2.5-TW

CE	800V/24A	0.08-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate	5.2/62.5/1.5mm	



STB2.5-TW-PE

CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate	5.2/62.5/1.5mm	




STB2.5-QU

CE	800V/24A	0.08-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate	5.2/74.3/1.5mm	



STB2.5-QU-PE

CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate	5.2/74.3/1.5mm	



STB2.5-2L

CE	500V/22A	0.08-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate	5.2/71.9/1.5mm	



STB2.5-2L-PV

CE	500V/24A	0.08-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate	5.2/71.9/1.5mm	



STB2.5-2L-PE

CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate	5.2/71.9/1.5mm	



STB6

CE	1000V/41A	0.2-10mm ²
UL	600V/50A	24-10AWG
T/W/End plate	8.2/69.5/1.5mm	



STB6-PE

CE	—	0.2-10mm ²
UL	—	24-10AWG
T/W/End plate	8.2/69.5/1.5mm	



STB6-TW

CE	1000V/41A	0.2-10mm ²
UL	600V/50A	24-10AWG
T/W/End plate	8.2/91.6/1.5mm	




STB6-TW-PE


CE	—	0.2-10mm ²
UL	—	24-10AWG
T/W/End plate	8.2/91.6/1.5mm	

DC-Steel Screw Terminal Blocks

- The steel cage is used to clamp the wire, and the connection is stable and reliable
- Double channel bridge position, easy to realize potential distribution
- Pluggable bridges and rich accessory systems perfectly solve the application needs of the user end
- Large area identification space, clear wiring

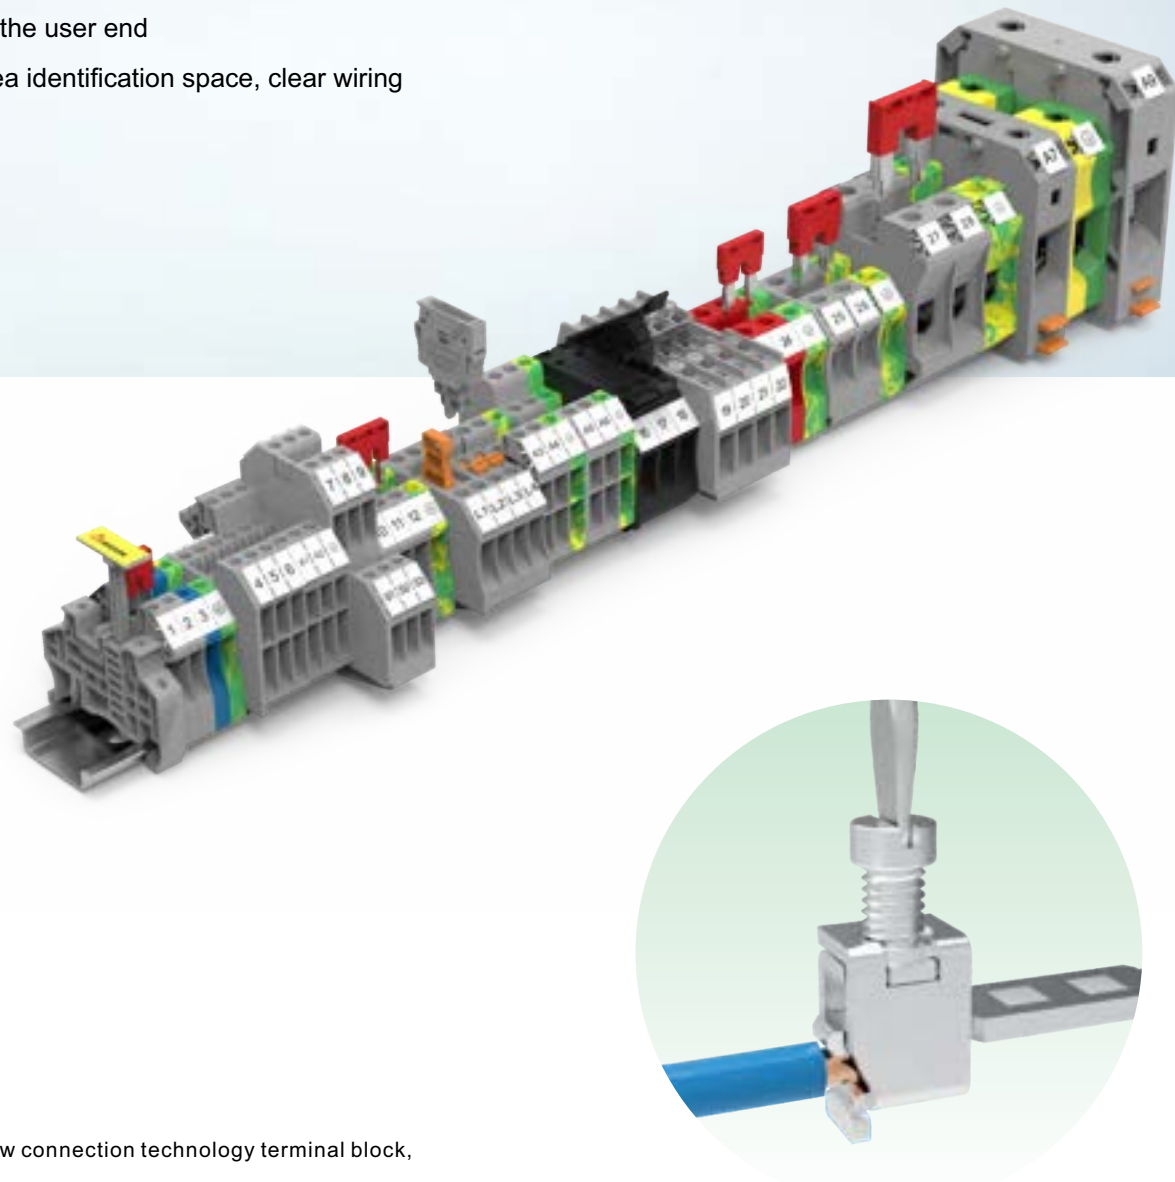

DC steel screw connection technology terminal block, use steel screw and steel cage to clamp wire, good torque and shock resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring the connection is reliable and safe. PA66 material plastic parts can meet the working environment of -40°C to 105°C, and all DC series of din rail products are in line with UL94 V0 flame retardant grade. Compact structure design for superior product performance.

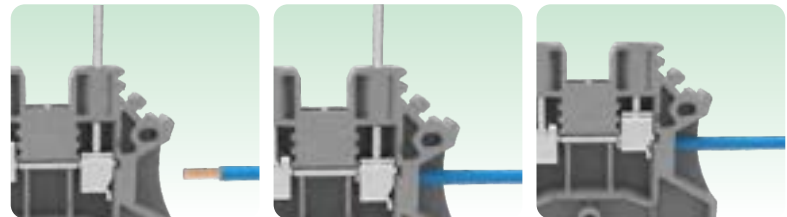



DC2.5

CE	800V/24A	0.2-4mm ²
UL	600V/25A	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		



DC2.5-PE


CE	—	0.2-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		


DC2.5-12A(H)
(Cross & Slotted screw)

CE	800V/24A	0.2-4mm ²
UL	600V/25A	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		



DC2.5-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.2-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		



DC2.5-TW

CE	1000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.1/48.7/1.5mm		




DC2.5-TW-PE

CE	1000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.1/48.7/1.5mm		


DC2.5-TW-02A(H)
(Cross & Slotted screw)

CE	1000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.1/48.7/1.5mm		




DC2.5-QU

CE	500V/24A	0.2-4mm ²
UL	150V/20A	24-12AWG
T/W/End plate 5.1/54.4/1.5mm		



DC2.5-QU-PE

CE	—	0.2-4mm ²
UL	—	24-12AWG
T/W/End plate 5.1/54.4/1.5mm		



DCKKB2.5

CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		




DCKKB2.5-PV

CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		




DCKKB2.5-PE

CE	—	0.5-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/76/1.5mm		


DCKKB2.5-02A(H)
(Cross & Slotted screw)

CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		


DCKKB2.5-PV-02A(H)
(Cross & Slotted screw)

CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		


DCKKB2.5-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/76/1.5mm		



DC4

CE	1000V/32A	0.2-6mm ²
UL	600V/30A	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		



DC4-PE

CE	—	0.2-6mm ²
UL	—	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		


DC4-12A(H)
(Cross & Slotted screw)

CE	1000V/32A	0.5-4mm ²
UL	600V/30A	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		


DC4-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		



DC4-TW

CE	500V/32A	0.5-6mm ²
UL	300V/20A	20-12AWG
T/W/End plate 6.1/50.9/1.5mm		



DC4-TW-PE

CE	—	0.5-6mm ²
UL	—	20-12AWG
T/W/End plate 6.1/50.9/1.5mm		


DC4-QU
(Cross & Slotted screw)

CE	500V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/54.4/1.5mm		


DC4-QU-PE
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/54.46/1.5mm		



DCKKB4

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		




DCKKB4-PV

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		



DCKKB4-PE

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/76/1.5mm		




DCKKB4-01P-11-02A(H)


CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		


DCKKB4-PV-02A(H)
(Cross & Slotted screw)

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		


DCKKB4-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/76/1.5mm		




DC6

CE	1000V/41A	0.5-6mm ²
UL	600V/50A	22-8AWG
T/W/End plate 8.0/45/1.5mm		



DC6-PE

CE	—	0.5-6mm ²
UL	—	22-8AWG
T/W/End plate 8.0/45/1.5mm		




DC10

CE	1000V/57A	0.5-10mm ²
UL	600V/65A	22-6AWG
T/W/End plate 10/45/1.5mm		




DC10-PE

CE	—	0.5-10mm ²
UL	—	22-6AWG
T/W/End plate 10/45/1.5mm		


DC10-300A(H)
(Cross & Slotted screw)

CE	800V/57A	0.5-10mm ²
UL	600V/30A	20-6AWG
T/W/End plate 10/45/1.5mm		




DC10-TW

CE	1000V/57A	1.5-16mm ²
UL	600V/65A	16-6AWG
T/W/End plate 10.2/58.7/1.5mm		




DC10-TW-PE

CE	—	1.5-16mm ²
UL	—	16-6AWG
T/W/End plate 10/58.7/1.5mm		



DCKKB10

CE	500V/57A	0.5-10mm ²
UL	300V/65A	20-6AWG
T/W/End plate 10/83.9/1.5mm		




DCKKB10-PV

CE	500V/57A	0.5-10mm ²
UL	300V/65A	20-6AWG
T/W/End plate 10/83.9/1.5mm		



DCKKB10-PE

CE	—	0.5-10mm ²
UL	—	20-6AWG
T/W/End plate 10/83.9/1.5mm		



DC16

CE	1000V/76A	1.5-25mm ²
UL	600V/100A	14-3AWG
T/W/End plate 12/49/1.5mm		




DC16-PE

CE	—	1.5-25mm ²
UL	—	14-3AWG
T/W/End plate 12/49/1.5mm		



DC35

CE	1000V/125A	1.5-50mm ²
UL	600V/150A	14-1/0AWG
T/W/End plate 16/55.4/-mm		



DC35-PE

CE	—	1.5-50mm ²
UL	—	14-1/0AWG
T/W/End plate 16/55.4/-mm		



DC50

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45/-mm		



DC50-PE

CE	—	16-50mm ²
UL	—	6-1/0AWG</



DC4-HE-LD24

CE	24V/6.3A	0.5-6mm ²
UL	—	20-10AWG
T/W/End plate	8/58/1.5mm	



DC4-HE-LD60

CE	60V/6.3A	0.5-6mm ²
UL	—	20-10AWG
T/W/End plate	8/58/1.5mm	




DC4-HE-LD250

CE	250V/6.3A	0.5-6mm ²
UL	—	20-10AWG
T/W/End plate	8/58/1.5mm	




DC4-MT

CE	500V/20A	0.5-6mm ²
UL	600V/16A	26-10AWG
T/W/End plate	6.1/56.8/1.5mm	




DC4-TG

CE	500V/20A	0.5-6mm ²
UL	600V/16A	26-10AWG
T/W/End plate	6.1/56.8/1.5mm	



DCTK 6-20A(H)

CE	630V/41A	0.5-6mm ²
UL	300V/45A	22-8AWG
T/W/End plate	8/69/1.5mm	



DCTK6 N

CE	630V/41A	0.5-6mm ²
UL	300V/45A	22-8AWG
T/W/End plate	8/69/1.5mm	



DC2.5-CU

CE	800V/24A	0.2-4mm ²
UL	600V/25A	26-12AWG
T/W/End plate	5.1/42.3/1.5mm	



DC2.5-PE-CU

CE	—	0.2-4mm ²
UL	—	26-12AWG
T/W/End plate	5.1/42.3/1.5mm	



DC4-CU

CE	1000V/32A	0.5-4mm ²
UL	600V/30A	22-10AWG
T/W/End plate	6.1/42.3/1.5mm	



DC4-CU-PE

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate	6.1/42.3/1.5mm	



DC6-CU

CE	1000V/41A	0.5-6mm ²
UL	600V/50A	22-8AWG
T/W/End plate	8/44.95/1.5mm	



DC6-PE-CU

CE	—	0.5-6mm ²
UL	—	22-8AWG
T/W/End plate	8/44.95/1.5mm	



DC16-CU-200A(H)

CE	1000V/76A	1.5-25mm ²
UL	600V/100A	14-3AWG
T/W/End plate	12/49/1.5mm	



DC16-PE-CU-200A(H)

CE	—	1.5-25mm ²
UL	—	14-3AWG
T/W/End plate	12/49/1.5mm	



DFAXX5.2

POLE : 2-10P,20P



DFAXX6.2

POLE : 2-10P



DFAXX8.2

POLE : 2-10P



DFAXX10.2

POLE : 2-10P



DFAXX12.2

POLE : 2-3P



DFA35

POLE : 2-3P



EBCXX-8


EBCXX-8 → DC4-HE Series

XX: NO. OF POLE


2,3,10POLES

PC-Copper Screw Terminal Blocks

- Screw connection technology is adopted, with excellent connection airtightness
- All copper alloy material, low contact resistance
- The wiring is very flexible and can realize multi wire connection
- Large area identification space, clear wiring

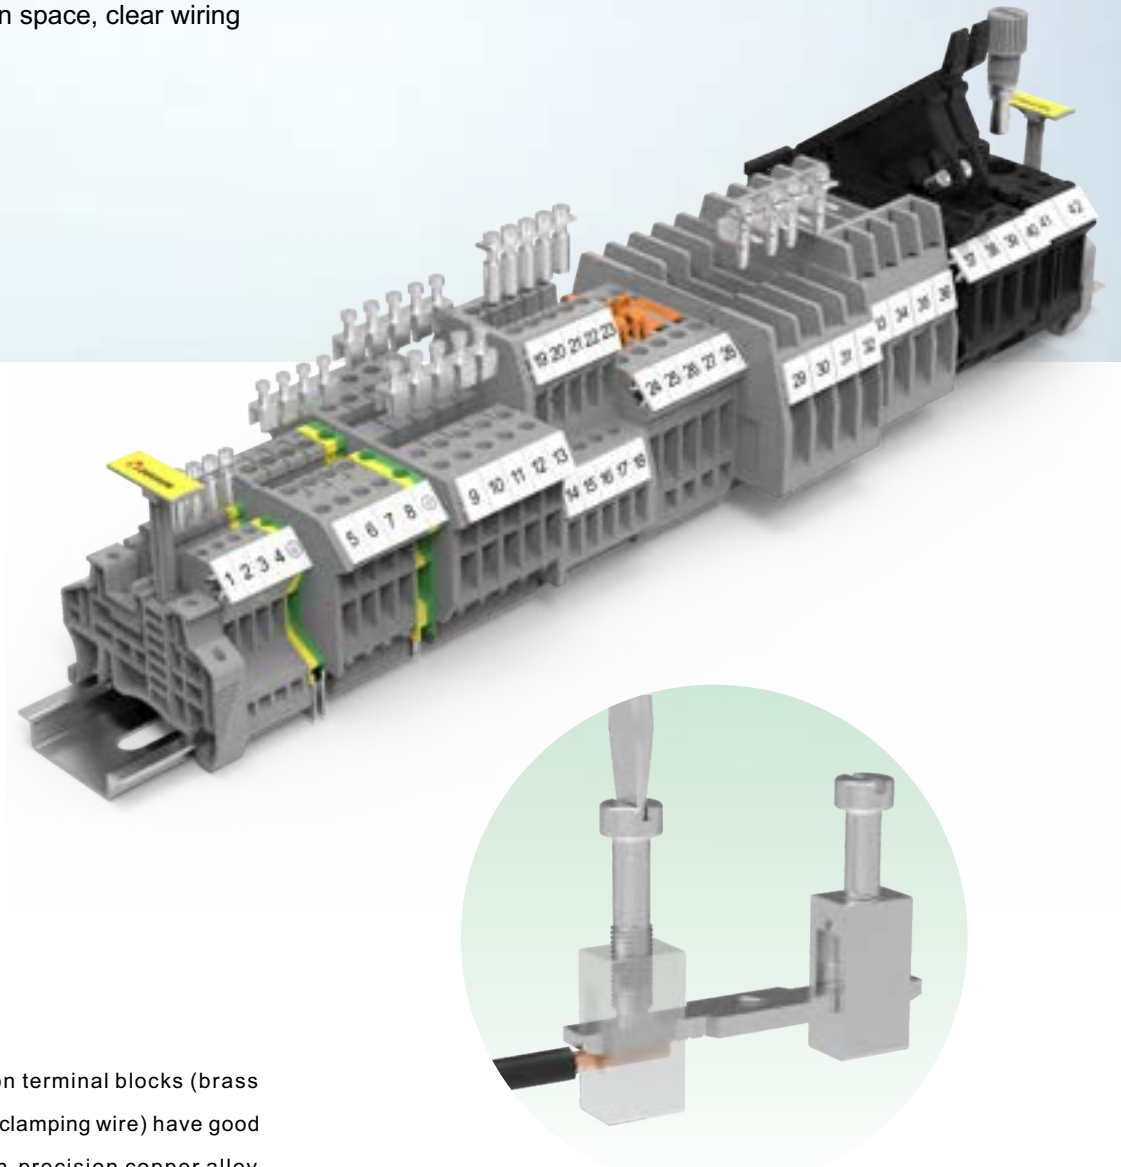

PC brass screw connection terminal blocks (brass screw and brass block with clamping wire) have good corrosion resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40 °C to 105°C, and all PC series of din rail products are in line with UL94 V0 flame retardant grade. Traditional screw terminal blocks: full product line provide different solutions for various industries.

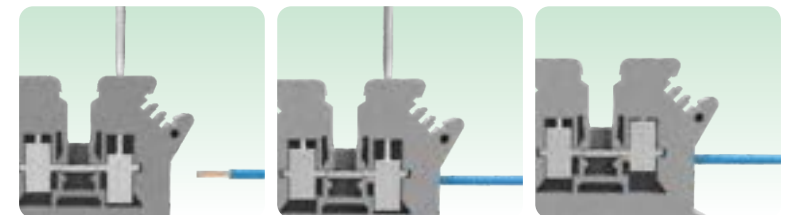




PC1.5

CE	500V/17.5A	0.2-4mm ²
UL	600V/10A	26-16AWG
T/W/End plate 4.2/42.5/1.5mm		



PC2.5

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	24-12AWG
T/W/End plate 5.2/42.5/1.6mm		



PC2.5-PE

CE	—	0.2-2.5mm ²
UL	—	24-12AWG
T/W/End plate 5.2/42.5/1.6mm		




PC2.5B

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	24-12AWG
T/W/End plate 6.2/42.5/1.5mm		



PC2.5-TW

CE	400V/24A	0.2-2.5mm ²
UL	300V/20A	24-14AWG
T/W/End plate 5.2/50.1/1.5mm		




PC2.5-TW-PE

CE	—	0.2-2.5mm ²
UL	—	24-14AWG
T/W/End plate 5.2/50.1/1.5mm		




PCDK2.5

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/63.5/1.5mm		




PCDK2.5-PE

CE	—	0.2-2.5mm ²
UL	—	24-12AWG
T/W/End plate 5.2/63.5/1.5mm		



PCKK2.5

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/56/2.5mm		




PCKK2.5-PV

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/56/2.5mm		



PC4

CE	800V/32A	0.2-4mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/42.5/1.6mm		




PC4-PE

CE	—	0.2-4mm ²
UL	—	24-10AWG
T/W/End plate 6.2/42.5/1.6mm		



PC4-TW

CE	500V/32A	0.2-4mm ²
UL	300V/30A	24-12AWG
T/W/End plate 6.2/50.1/2mm		




PC4-TW-PE

CE	—	0.2-4mm ²
UL	—	24-12AWG
T/W/End plate 6.2/50.1/2mm		



PCDK4

CE	630V/32A	0.2-4mm ²
UL	300V/30A	24-10AWG
T/W/End plate 6.2/63.5/1.5mm		




PCDK4-PE

CE	—	0.2-4mm ²
UL	—	24-10AWG
T/W/End plate 6.2/63.5/1.5mm		



PCKK4

CE	500V/32A	0.2-4mm ²
UL	300V/30A	26-10AWG
T/W/End plate 6.2/56/2.5mm		



PCKK4-PE

CE	—	0.2-4mm ²
UL	—	26-10AWG
T/W/End plate 6.2/56/2.5mm		



PC6

CE	800V/41A	0.2-6mm ²
UL	600V/50A	24-8AWG
T/W/End plate 8.2/42.5/1.6mm		




PC6-PE

CE	—	0.2-6mm ²
UL	—	24-8AWG
T/W/End plate 8.2/42.5/1.6mm		




PC10

CE	800V/57A	0.2-10mm ²
UL	600V/65A	20-6AWG
T/W/End plate 10.2/42.5/1.6mm		



PC10-PE

CE	—	0.2-10mm ²
UL	—	20-6AWG
T/W/End plate 10.2/42.5/1.6mm		




PC16

CE	800V/76A	0.2-16mm ²
UL	600V/85A	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		



PCIK16

CE	800V/76A	0.2-16mm ²
UL	600V/85A	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		



PC16-PE

CE	—	0.2-16mm ²
UL	—	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		



PC35

CE	1000V/125A	0.2-35mm ²
UL	600V/150A	18-1/0AWG
T/W/End plate 15.2/50mm		



PCIK35

CE	800V/125A	0.2-35mm ²
UL	600V/85A	12-2AWG
T/W/End plate 15.2/55mm		



PC35-PE

CE	—	0.2-35mm ²
UL	—	18-1/0AWG
T/W/End plate 15.2/50mm		



PC50

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45mm		



PC50-PE

CE	—	16-50mm ²
UL	—	6-1/0AWG
T/W/End plate 20/70.45mm		




PC50-01A(H) (Allen screws)

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45mm		



PC50-PE-01A(H) (Allen screws)

CE	—	16-50mm ²
UL	—	6-1/0AWG
T/W/End plate 20/70.45mm		



PC95

CE	1000V/232A	25-95mm ²
UL	600V/230A	2-4/0AWG
T/W/End plate 25/83mm		




PC95-PE

CE	—	25-95mm ²
UL	—	2-4/0AWG
T/W/End plate 25/83mm		



PCMB2.5

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	28-12AWG
T/W/End plate 5.2/28/1.0mm		



PCMB4

CE	500V/32A	0.2-4mm ²
UL	300V/30A	26-10AWG
T/W/End plate 6.2/28/1.0mm		



PC4-HE

CE	800V/6.3A	0.2-4mm ²
UL	600V/6.3A	26-10AWG
T/W/End plate 8.2/72.89mm		



PC10-DR

CE	800V/10A	0.5-10mm ²
UL	600V/10A	24-6AWG
T/W/End plate 12/57.8mm		



PCMT2.5

CE	500V/16A	0.2-2.5mm ²
UL	300V/10A	24-14AWG
T/W/End plate 5.2/46.25/1.0mm		



PCMT4

CE	800V/16A	0.2-4mm ²
UL	600V/15A	24-12AWG
T/W/End plate 6.2/51mm		



PCTK6

CE	400V/41A	0.5-6mm ²
UL	300V/40A	26-10AWG
T/W/End plate 8.2/72/2.0mm		




PCTK6-BEN

CE	500V/41A	0.5-6mm ²
UL	300V/40A	26-10AWG
T/W/End plate 8.2/61/2.2mm		







DHV High-voltage Screw Terminal Blocks


- Adopt screw self-locking technology, with excellent anti loosening performance.
- Rated voltage up to kilovolts, especially suitable for medium and high voltage applications in the power industry.
- Copper alloy material, low resistivity, excellent electrical conductivity.
- Double-channel bridge wells, with a 2-20 bit bridge, can flexibly distribute potential.
- Large area identification at 45 °, marking areas easy to identify.

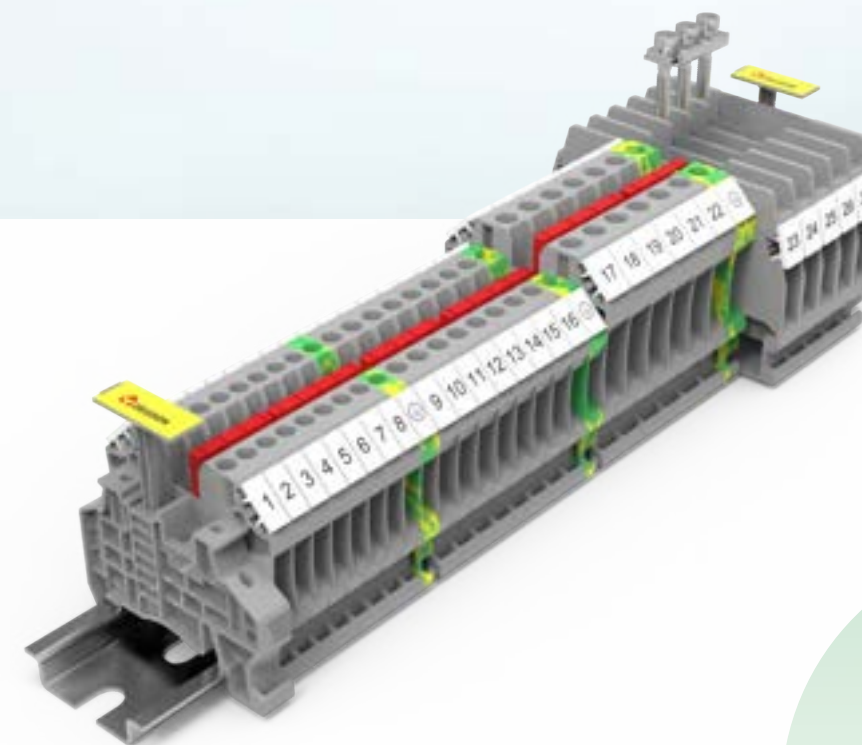

DHV high-voltage screw terminal blocks, using screw self-locking technology, have excellent wiring anti loosening performance. The copper screw and copper clamp body cooperate with each other to ensure the air tightness of long-term connections. High precision copper alloy conductive body minimizes temperature rise, ensuring reliable and safe connection. The plastic raw materials of PA66 can meet the working environment of - 40 °C to 105 °C, and all PC series products meet the UL94 V0 flame retardant grade. The rated voltage of the through type terminals is up to kilovolts, Especially suitable for medium and high voltage applications in the power industry.

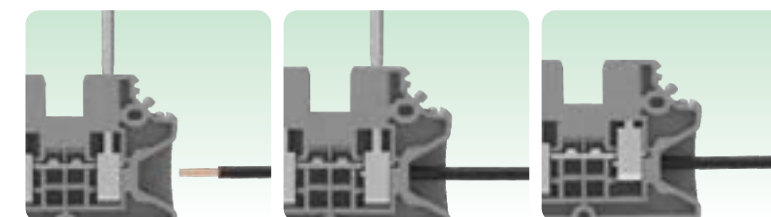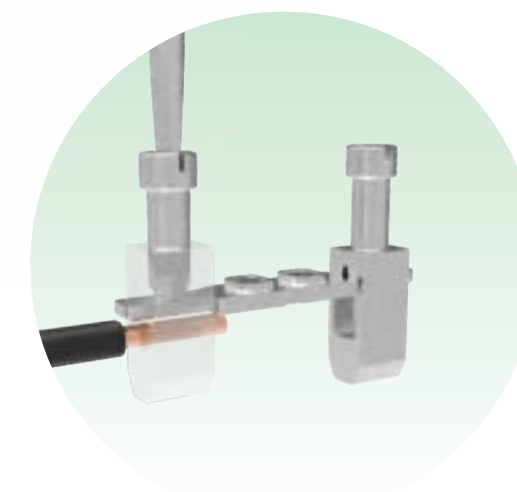


				
DHV2.5	DHV2.5-PE	DHV4	DHV4-PE	DHV6
CE 1000V/24A 0.14-4mm²	CE — 0.14-4mm²	CE 1000V/32A 0.14-6mm²	CE — 0.14-6mm²	CE 1000V/41A 0.2-10mm²
UL 600V/20A 26-12AWG	UL — 26-12AWG	UL 600V/30A 26-10AWG	UL — 26-10AWG	UL 600V/50A 24-8AWG
T/W/End plate 5.2/47.5/1.5mm	T/W/End plate 5.2/47.5/1.5mm	T/W/End plate 6.2/47.5/1.5mm	T/W/End plate 6.2/47.5/1.5mm	T/W/End plate 8.2/47.5/1.5mm
				
DHV6-PE	DHV16	DHV16-PE	DHV4-2L-MT	DHV4-2L-TG
CE — 0.12-10mm²	CE 1000V/76A 1.5-25mm²	CE — 1.5-25mm²	CE 500V/30A 0.14-6mm²	CE 500V/30A 0.14-6mm²
UL — 24-8AWG	UL 600V/100A 14-3AWG	UL — 14-3AWG	UL 300V/20A 26-10AWG	UL 300V/20A 26-10AWG
T/W/End plate 8.2/47.5/1.5mm	T/W/End plate 12/49/1.5mm	T/W/End plate 12/49/1.5mm	T/W/End plate 6.2/100.5/1.5mm	T/W/End plate 6.2/100.5/1.5mm
				
DHV4-2L-HE	DHV4-2L-HE-LD24	DHV4-2L-HE-LD60	DHV4-2L-HE-LD250	
CE 500V/6.3A 0.14-6mm²	CE 24V/6.3A 0.14-6mm²	CE 60V/6.3A 0.14-6mm²	CE 250V/6.3A 0.14-6mm²	
UL 300V/6.3A 26-10AWG	UL — 26-10AWG	UL — 26-10AWG	UL — 26-10AWG	
T/W/End plate 6.2/100.5/1.5mm	T/W/End plate 6.2/100.5/1.5mm	T/W/End plate 6.2/100.5/1.5mm	T/W/End plate 6.2/100.5/1.5mm	

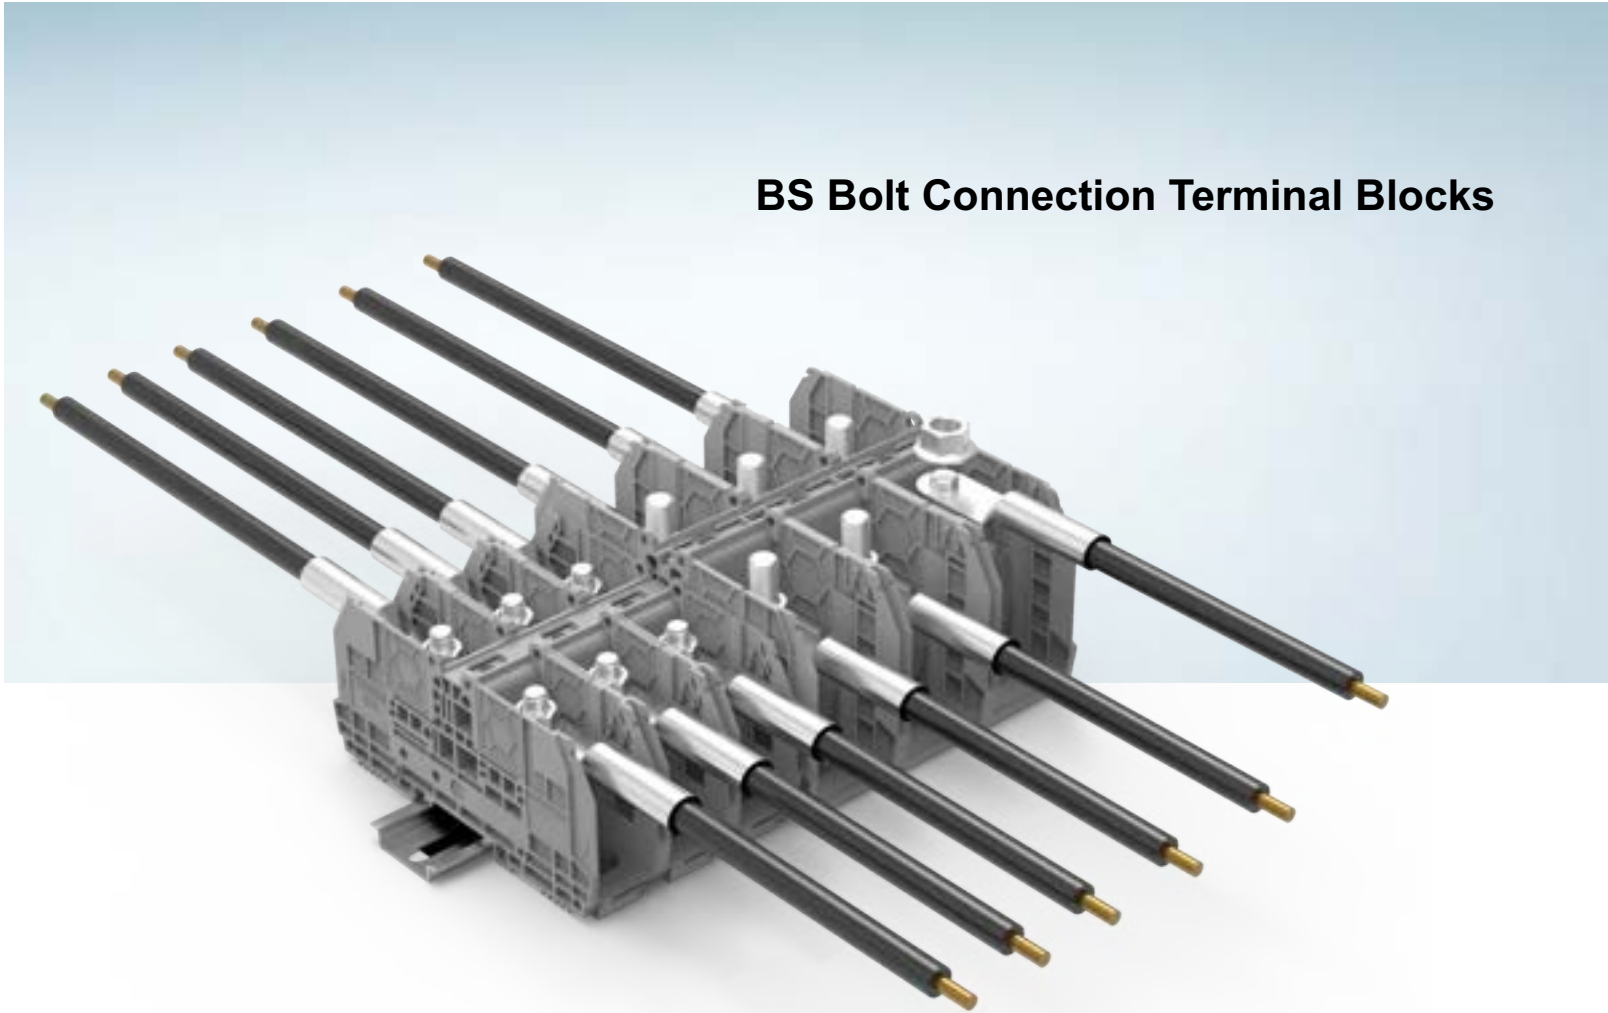


BS Bolt Connection Terminal Blocks

- BS Bolt connection terminal blocks, with bolt connection technology, secure connection.
- Multiple cable ends can be connected with a single screw, which can be used for power feed.
- Closed structure design at both ends, with protective cover, safe and anti-touch.
- Compatible with the marking system to clearly identify the working area.
- Equipped with test hole in the middle, easy to test the circuit.


HOW TO ORDER BS SERIES

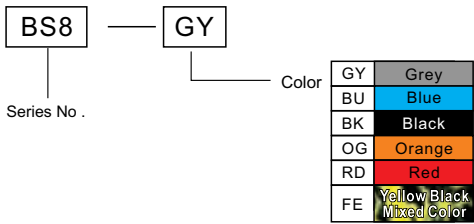

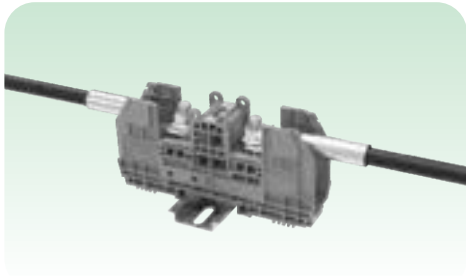


Bolt connection

- BS Series products include BS8, BS10 bolt connection terminal blocks, can connect wires with diameters from 2.5mm² to 150mm².

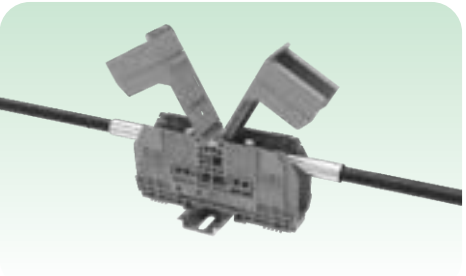

Removable cover

- Closed structure design at both ends, with protective cover, safe and anti-touch.

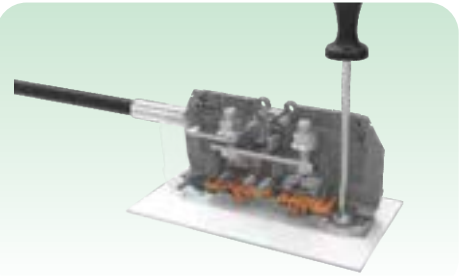

Flexible installation

- Variety installation methods, available for panel & Rail mounted.



BS6

CE	1000V/125A	2.5-35mm ²
UL	600V/115A	16-12AWG
T/W/End plate	27/155/-mm	




BS6 N

CE	1000V/125A	2.5-35mm ²
UL	600V/115A	16-12AWG
T/W/End plate	27/107/-mm	



BS8

CE	1000V/192A	2.5-70mm ²
UL	600V/175A	16-2/0AWG
T/W/End plate	29/184/-mm	



BS8 N

CE	1000V/192A	2.5-70mm ²
UL	600V/175A	16-2/0AWG
T/W/End plate	29/136/-mm	



BS10

CE	1000V/309A	6-150mm ²
UL	600V/310A	10-350AWG
T/W/End plate	41/235/-mm	




BS10 N

CE	1000V/309A	6-150mm ²
UL	600V/310A	10-350AWG
T/W/End plate	41/144/-mm	



Marking System


Degson marking system, providing a complete solution for industrial site identification case. Our thermal transfer printers and laser printers provide customers with Terminal blocks marker, Cable marker, Device marker Printing Service.

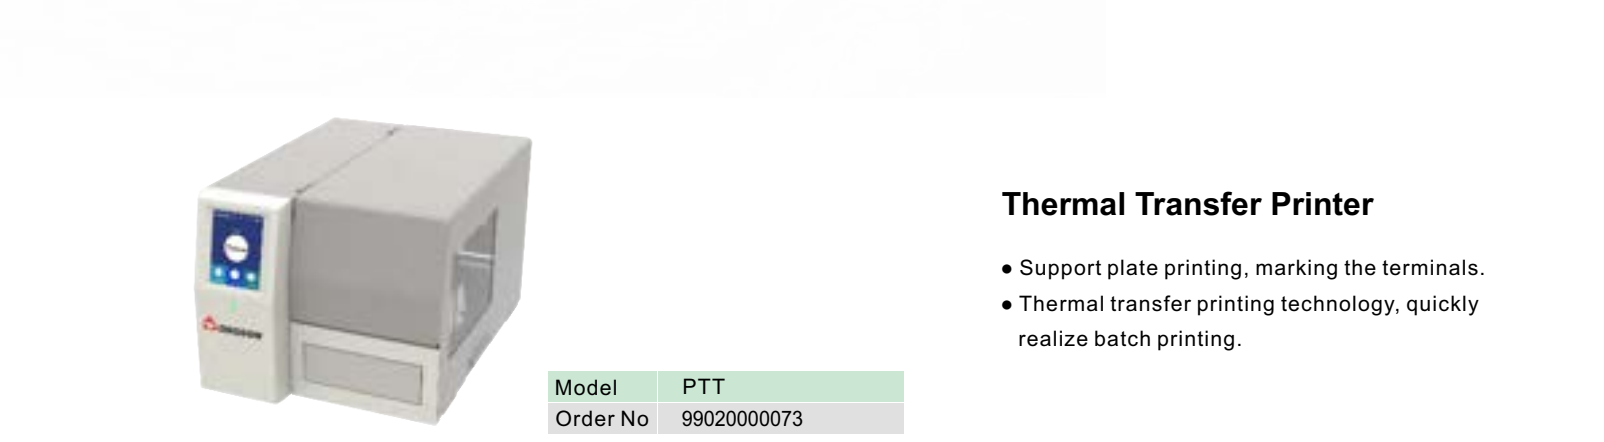

Thermal Transfer Printer

- Support plate printing, marking the terminals.
- Thermal transfer printing technology, quickly realize batch printing.


Model	PTT
Order No	99020000073

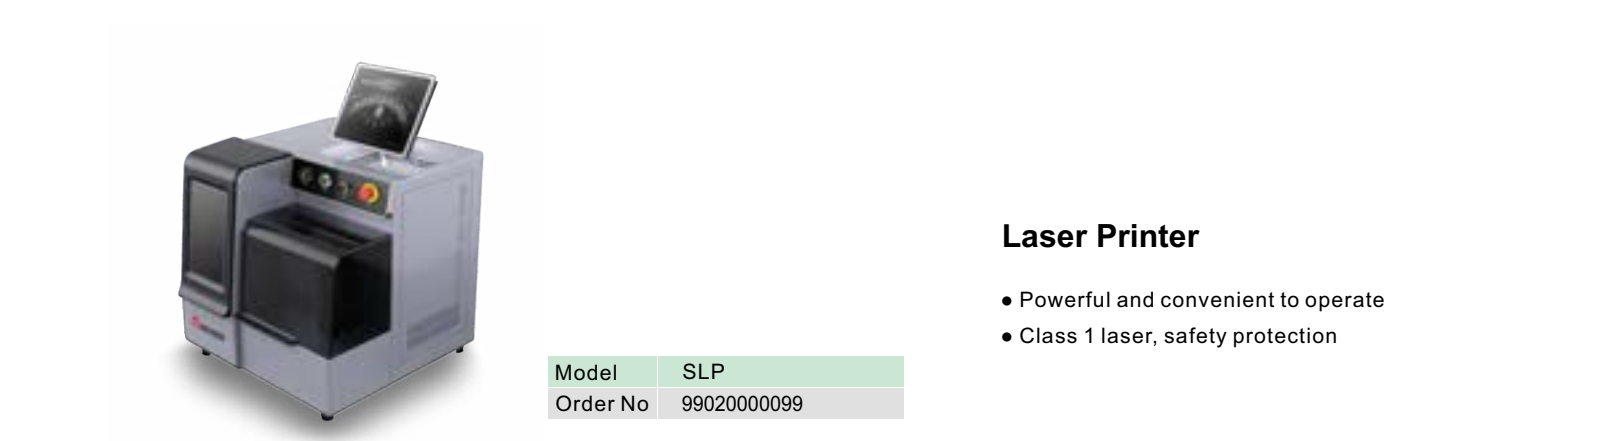

Laser Printer

- Powerful and convenient to operate
- Class 1 laser, safety protection

Model	SLP
Order No	99020000099

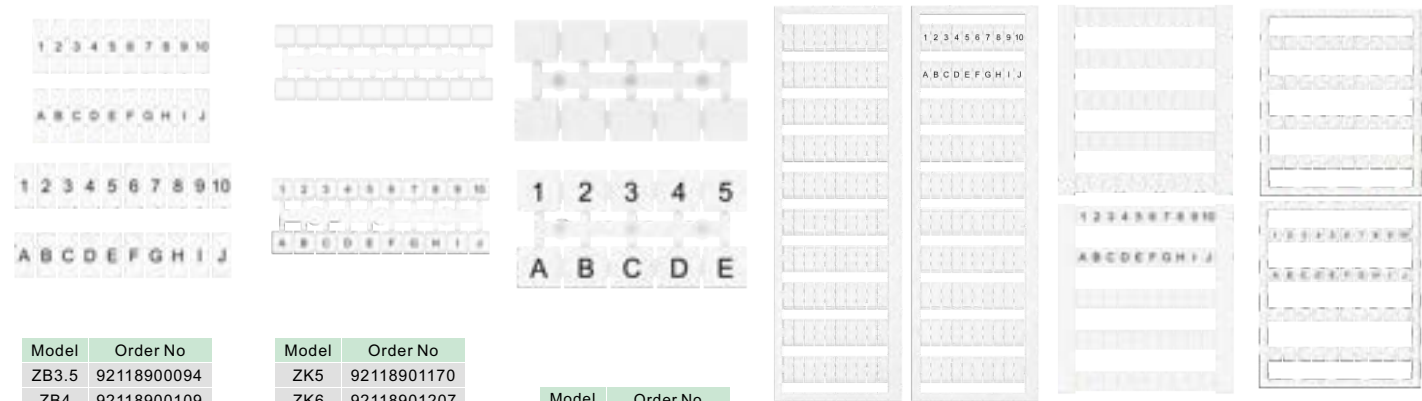

Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
ZB3.5	92118900094	ZK5	92118901170	ZT12	92118901290	WB4	92118900841	DEK4	92118900750
ZB4	92118900109	ZK6	92118901207			WB5	92118900002	DEK5	92118900753
ZB5	92118900129							DEK6	92118900791
ZB6	92118900430								
ZB8	92118900578								
ZB10	92118900024								



Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
DTH3.5-25x3.5	10060000570	DTH5-25x5	10060000569	DMTH5-2	11060000588	DMTH5-3	11060000589	KLM3-20x8	10060000573
DTH3.5-25x12	10060000567	DTH5-25x12	10060000568						




Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
KLM3-44x8	10060000574	EM	11060000739	DBE-1	11060000210	DBE-2	11060000286	DLM2	11060000214



Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
EEA1.5	92118901391	DML(25x12)-WH	99050000008	DML(20x8)-WH	99050000002	NS15	92113900003	NS35-7.5	92113900022
EEA2.5	11060000064	DML(25x12)-YE	99050000009	DML(44x7)-WH	99050000010			NS35-7.5-AL	92113900037
EEA4	11060000065			DML(25x5)-WH	99050000020				
EEA6	11060000066			DML(25x12)-WH	99050000011				
EEA10	92118901059			DML(41x13)-WH	99050000008				
EEA16	92118901060			DML(37x7)-WH	99050000009				
				DML(20x12)-WH	99050000006				
				DML(18x11)-WH	99050000007				
				DML(20x8)-YE	99050000012				
				DML(44x7)-YE	99050000013				
				DML(25x5)-YE	99050000014				
				DML(25x12)-YE	99050000015				
				DML(41x13)-YE	99050000016				
				DML(37x7)-YE	99050000017				
				DML(20x12)-YE	99050000018				
				DML(18x11)-YE	99050000019				



Model	Order No
NS35/7.5-AL	92113900037

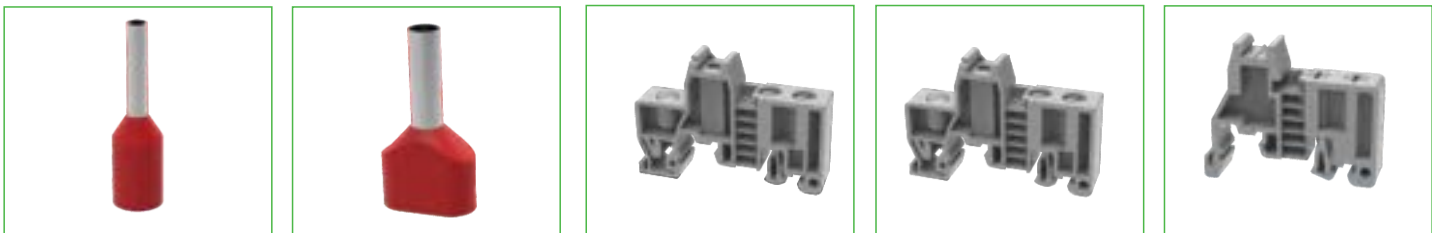

Model	Order No	Model	Order No	Model	Order No
E-PC-1100A(H)	11060000074	E-PC-1100A(H)	11060000666	E-PC	11060000073



Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
E-WS	11060000127	E-WS N	11060000669	E-WS-5	11060000422	DLS-CU3/10	92118900917	AB/SS	/



Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
AB-SKC	11060000737	SKC8	11060000746	ATP-DS	11041000387	ATP-PC N	94200019534	AP3-T	11060000843
		SKC14	11060000747						



Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
AP3-T-KS	11060000860	AP3-COVER-1000	11060000887	NS35/7.5-CAP	11060000470	NS35/15-CAP	11060000471	UNICUT-TOP	99030000004



Model	Order No	Model	Order No	Model	Order No	Model	Order No	Model	Order No
UNIWSP	99030000007	UNIKNF	99030000012	UNIWCP	99030000010	UNIWCUT	99030000005	UNICDS	99030000011

ENVIRONMENTAL POLICY

DEGSON realizes system regulation without lead in 2005 and has been granted ISO14001 in 2006. All the products conform to the European ROHS requirement.

DEGSON realizes the importance to protect environment resources, selfconsciously meets environment protection requirements for products and regards it as the responsibility.

Thus, we have made the following environment strategic policy:

1. To meet customers' demands and obey the national and local laws and regulations as well as other environmental protection requirements.
2. Take environmental protection as one criterion for continuing development of our company. Insist on fully development of quality, benefit and environmental protection.
3. Fully considering the factors which will influence the environment in the processes of product development, manufacturing, material usage and waste processing, establish management system of waste in order to improve the environment of our company.
4. To increase the employees' consciousness of environmental protection through training and to realize the continuing improvement of environment management system and the ability of environmental protection.
5. To make full use of resources and to decrease consumption of material in order to save energy.
6. To promise to our partners and society that we will make contribution to environment protection. There is only one Earth for our humanity.
7. To strive for making conservation-oriented and environment-friendly products through continuous innovation and developing new materials and technology.

