




Interface Electronics

**DEGSON**

Device Connection Technology

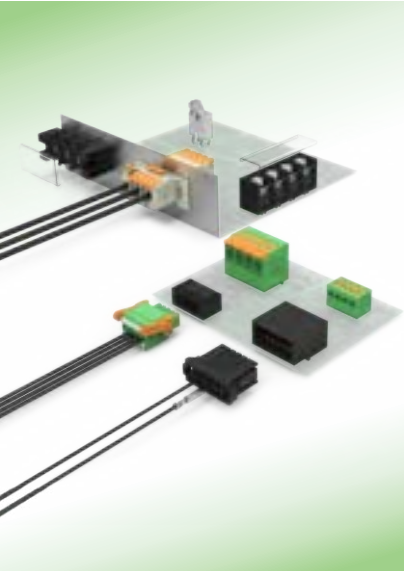

DEGSON PTE. LTD.

ISO9001 ISO14001 ISO45001 ISO80079-34 ISO1522163 IATF16949

**DEGSON**

DIN Rail Terminal Blocks
And Accessories System



DEGSON PTE. LTD.

ISO9001 ISO14001 ISO45001 ISO80079-34 ISO1522163 IATF16949

**DEGSON**

Heavy Duty Connector



DEGSON PTE. LTD.

ISO9001 ISO14001 ISO45001 ISO80079-34 ISO1522163 IATF16949

**DEGSON**

High Voltage & EV Charging System



NINGBO DEGSON EMOBILITY CONNECTIVITY CO.,LTD.

ISO9001 ISO14001 IATF16949

**DEGSON**

Interface Electronics



DEGSON PTE. LTD.

ISO9001 ISO14001 ISO45001 ISO80079-34 ISO1522163 IATF16949

**DEGSON**

Automation



DEGSON PTE. LTD.

ISO9001 ISO14001 ISO45001 ISO80079-34 ISO1522163 IATF16949



Brief Introduction

Founded in 1990, DEGSON is well known as a comprehensive industrial solution provider, with UL-CTDP, VDE-TDAP and CNAS approved laboratory. DEGSON has passed ISO9001, ISO14001, ISO45001, ISO80079-34, ISO/TS22163 and IATF16949 Management System, and is a national high-tech enterprise.

DEGSON is engaged in supplying highly reliable and durable products to serve global customers. The company has a market-leading capability of mould processing, automatic manufacturing and advanced testing. DEGSON has the complete engineering ability to support global customers with the professional customization solution and value-added service.


DEGSON products are widely recognized in China, the USA, Germany, the UK, Italy, Spain, Turkey, Japan, South Korea, Singapore, etc. totally hundred countries and regions. DEGSON supply high quality products and provide professional services globally in the industry sectors likely industrial automation, instrument, electric power, railway, marine and offshore, new energy, E-bike industrial elevator, lighting, security, machinery, etc. The company won the recognition from partners among Fortune 500 and industry leading enterprises.

Based on the core values of "Clients First, Win-win Strategy, Responsibility Integrity, Excellence Pursuit", DEGSON continuously integrates professional technical resources, R&D innovation, product manufacturing and technology application capabilities. Relying on global sales network, DEGSON aims to supply series of multiple varieties of high-quality products and services. We provide global customers with professional and quick connected application solutions, help customers continue to create value. DEGSON is making contributions to creating a smart and interconnected world.



UL-CTDP (USA), VDE-TDAP (Germany) and CNAS labs

Strategic cooperation with UL and VDE

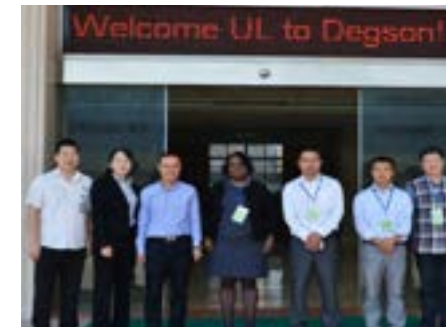

① The general manager of UL global energy & technology division visit our company



② Sven Ohrke, President of VDE global services, comes to DEGSON to discuss strategic cooperation



③ VDE Laboratory Accreditation: In July 2010, VDE Issued the "VDE Authorized Laboratory" Certificate to DEGSON's laboratory.
UL laboratory accreditation: UL formally issued "UL WTDP" certification to DEGSON in March 2013.
On April, 2016, UL-CTDP.
On December, 2016, VDE-TDAP.
On January, 2017, Pass IRIS system audit.



ISO9001



ISO14001



IATF16949



ISO/TS 22163



UL - CTDP



VDE - TDAP



CNAS certificate



EX certificate



UL Certificates: 10, Covering 4000+ Products



VDE Certificates: 178, Covering 3000+ Products



TUV certificate



European invention patent

CONTENTS

All Relays

- DRPS series ultra-thin relay
The width is only 6 mm, which saves space
1C/6A
DRPS-SSR solid state relays also available
- DRPE series standard relay
2C/10A; 4C/5A
- DRPL series high power relay
2C/10A; 4C/10A
- DRPT series compact relay
The Red and green lights represent AC and DC coils
1C/12A; 2C/8A
- DRPB series compact relay
Transparent case, can see the relay contacts
Plastic enclosure, protection level up to IP67
1C/16A; 2C/8A
DRPB-SSR solid state relays also available




Relay Combination Quickcheck	01-04
DRPS Power Relay Series	05-06
DRPS-SSR Solid State Relay Series	07-12
DRPB Power Relay Series	13-14
DRPB-SSR Solid State Relay Series	15-20
DRPT Power Relay Series	21-26
DRPE Power Relay Series	27-34
DRPL Power Relay Series	35-38

CONTENTS

Interface & Relay Module

We offer all kinds of pre-made cable & module to realize fast wiring and save time. We can satisfy your connection demands, and support special requirements.

- Interface Module
Quick 1 to 1 connection, provide 10, 20, 26, 34, 40, 50 pins, etc
- Relay Module
Provide 4, 8, 12, 16, 20, 32 channels EMR or SSR solution

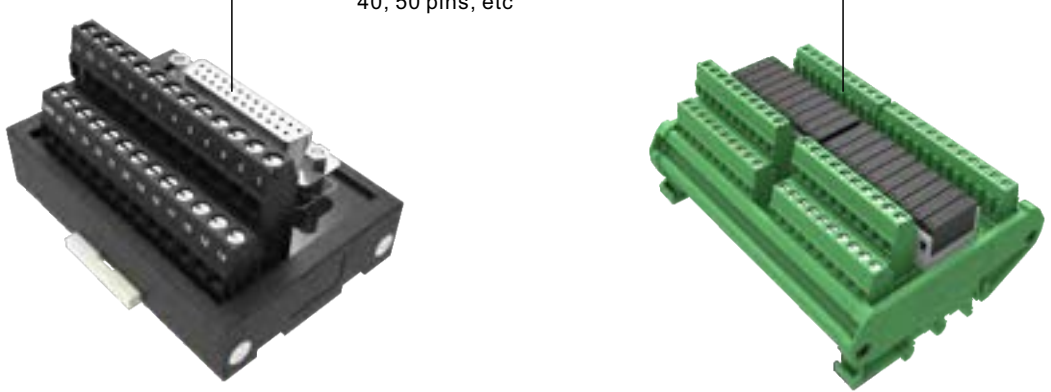

Interface Module Series	39-52
Relay Module Series	53-62

Power Supplies


We offer high-quality single-phase and three phase DIN rail power supplies, covering up to 960W, along with redundant module products to ensure reliable system power supply.



Standard Single Phase Power Supplies	63-72
Wide Input Single/Two Phase Power Supplies	73-80
Standard Three Phase Power Supplies	81-86
Redundancy Module	87-90



DRPS series				
Technical parameter	Relay	Base	Accessory	Assembled module
24DC/1CO/6A	DRPS-1C-D24-06Z(H)	DPSF05A-E1-00Z(H)	/	DRPSS-1C-L-D24-06Z(H)
220AC/1CO/6A	DRPS-1C-D60-06Z(H)	DPSF05B-E1-00Z(H)	/	DRPSS-1C-L-A220-06Z(H)

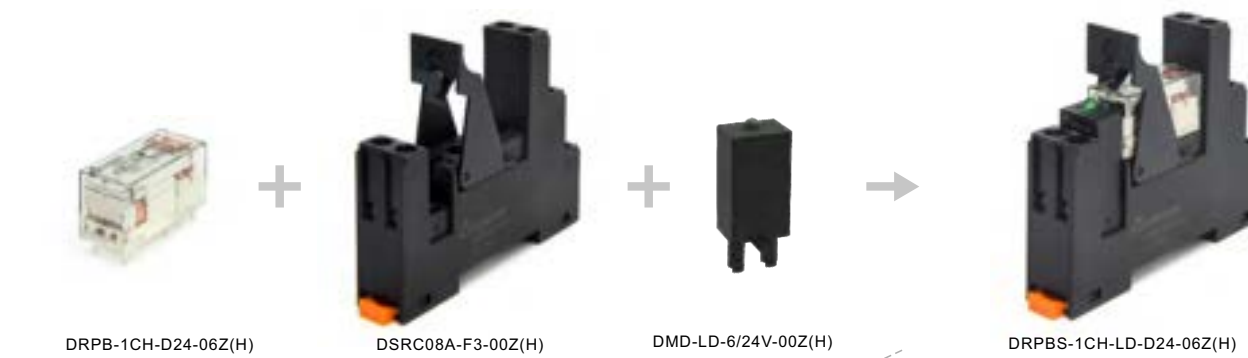

DRPB series				
Technical parameter	Relay	Base	Accessory	Assembled module
24DC/1CO/16A	DRPB-1CH-D24-06Z(H)	DSRC08A-F3-00Z(H)	DMD-LD-6/24V-00Z(H)	DRPBS-1CH-LD-D24-06Z(H)
24DC/2CO/8A	DRPB-2C-D24-06Z(H)	DSRC08A-F3-00Z(H)	DMD-LD-6/24V-00Z(H)	DRPBS-2C-LD-D24-06Z(H)



DRPT series				
Technical parameter	Relay	Base	Accessory	Assembled module
24DC/1CO/12A	DRPT-1C-LR-D24-02Z(H)	DSRT05A-E3-00Z(H)	/	DRPTS-1C-LR-D24-02Z(H)
220AC/1CO/12A	DRPT-1C-LR-A220-02Z(H)	DSRT05A-E3-00Z(H)	/	DRPTS-1C-LR-A220-02Z(H)
24DC/2CO/8A	DRPT-2C-LR-D24-02Z(H)	DSRT08A-E3-00Z(H)	/	DRPTS-2C-LR-D24-02Z(H)
220AC/2CO/8A	DRPT-2C-LR-A220-02Z(H)	DSRT08A-E3-00Z(H)	/	DRPTS-2C-LR-A220-02Z(H)



DRPE-2CH-LR-D24-07Z(H) + DPYF08A-E3-00Z(H) → DRPES-2CH-LR-D24-07Z(H)



DRPE-2CH-LR-A220-07Z(H) + DPYF08A-E3-00Z(H) → DRPES-2CH-LR-A220-07Z(H)



DRPE-4C-LR-D24-07Z(H) + DPYF14A-E3-00Z(H) → DRPES-4C-LR-D24-07Z(H)



DRPE-4C-LR-A220-07Z(H) + DPYF14A-E3-00Z(H) → DRPES-4C-LR-A220-07Z(H)

DRPE series				
Technical parameter	Relay	Base	Accessory	Assembled module
24DC/2CO/10A	DRPE-2CH-LR-D24-07Z(H)	DPYF08A-E3-00Z(H)	/	DRPES-2CH-LR-D24-07Z(H)
220AC/2CO/10A	DRPE-2CH-LR-A220-07Z(H)	DPYF08A-E3-00Z(H)	/	DRPES-2CH-LR-A220-07Z(H)
24DC/4CO/5A	DRPE-4C-LR-D24-07Z(H)	DPYF14A-E3-00Z(H)	/	DRPES-4C-LR-D24-07A(H)
220AC/4CO/5A	DRPE-4C-LR-A220-07Z(H)	DPYF14A-E3-00Z(H)	/	DRPES-4C-LR-A220-07Z(H)



DRPL-2C-L-D24-02Z(H) + DPTF08A-E3-00Z(H) → DRPLS-2C-L-D24-02Z(H)



DRPL-2C-L-A220-02Z(H) + DPTF08A-E3-00Z(H) → DRPLS-2C-L-A220-02Z(H)



DRPL-4C-L-D24-02Z(H) + DPTF14A-E3-00Z(H) → DRPLS-4C-L-D24-02Z(H)



DRPL-4C-L-A220-02Z(H) + DPTF14A-E3-00Z(H) → DRPLS-4C-L-A220-02Z(H)

DRPL series				
Technical parameter	Relay	Base	Accessory	Assembled module
24DC/2CO/10A	DRPL-2C-L-D24-02Z(H)	DPTF08A-E3-00Z(H)	/	DRPLS-2C-L-D24-02Z(H)
220AC/2CO/10A	DRPL-2C-L-A220-02Z(H)	DPTF08A-E3-00Z(H)	/	DRPLS-2C-L-A220-02Z(H)
24DC/4CO/10A	DRPL-4C-L-D24-02Z(H)	DPTF14A-E3-00Z(H)	/	DRPLS-4C-L-D24-02Z(H)
220AC/4CO/10A	DRPL-4C-L-A220-02Z(H)	DPTF14A-E3-00Z(H)	/	DRPLS-4C-L-A220-02Z(H)



DRPS

Features


- Small size,6A switching power.
- Multiple sockets optional.
- Green product RoHS.

Performance Parameters


Contact parameters	
Contact form	1C
Contact material	AgSnO ₂
Resistive load	6A@277VAC/28VDC
Switch power	1500VA, 144W
Contact resistance(Initial)	<100mΩ
Electrical life(1s on/1s off)	1C: >3*10 ⁴ (1s on, 9s off) 1C/P: >5*10 ⁴
Mechanical life(300cycles/min)	>1x10 ⁷ (18000 Ops/h)

Coil parameters	
Rated voltage (DC)	DC12V DC24V DC48V DC60V
Rated resistance(±10%)	847Ω 3388Ω 10618Ω 20570Ω
Operate voltage	DC:≤75%(Rated voltage)
Release voltage	DC:≥10%(Rated voltage)
Max input voltage	130%(Rated voltage)
Coil power	0.17W
Operate time	<8ms
Release time	<4ms


Universal parameters	
Insulation resistance	1000MΩ(500VDC)
Dielectric voltage	
Between contacts	1000VAC/1min
Between contacts and coil	4000VAC/1min
Shock withstanding	5G
Vibration withstanding	10-55Hz(Double amplitude 1.0mm)
Ambient temperature	-40...+85°C
Ambient humidity	5%~85%RH
Weight	5g
Matching socket	DPSF series, DPRF series
Min. switching load	1C: 100mA 6VDC 1C/P: 100mA 5VDC gold-plated 1C/P-XX-AU: 10mA 5VDC
Max. switching voltage	250VAC

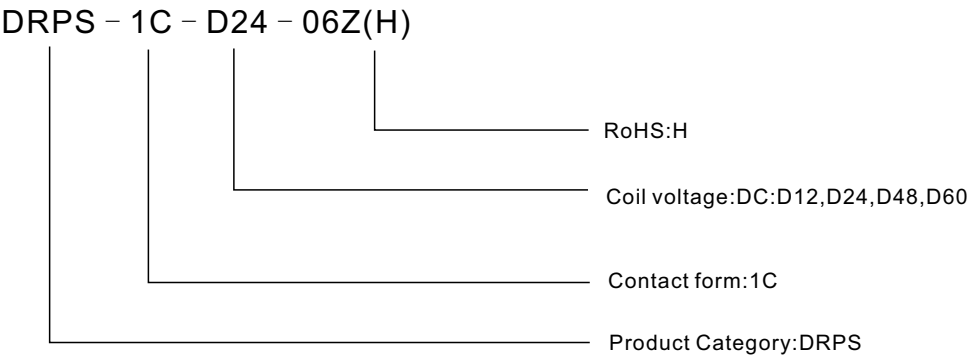

Overall Dimensions

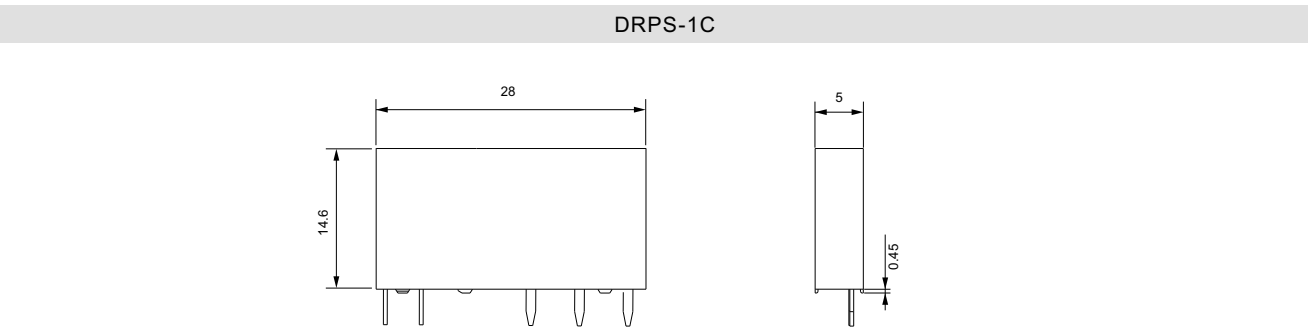

Installation Diagrams, Wiring Diagrams

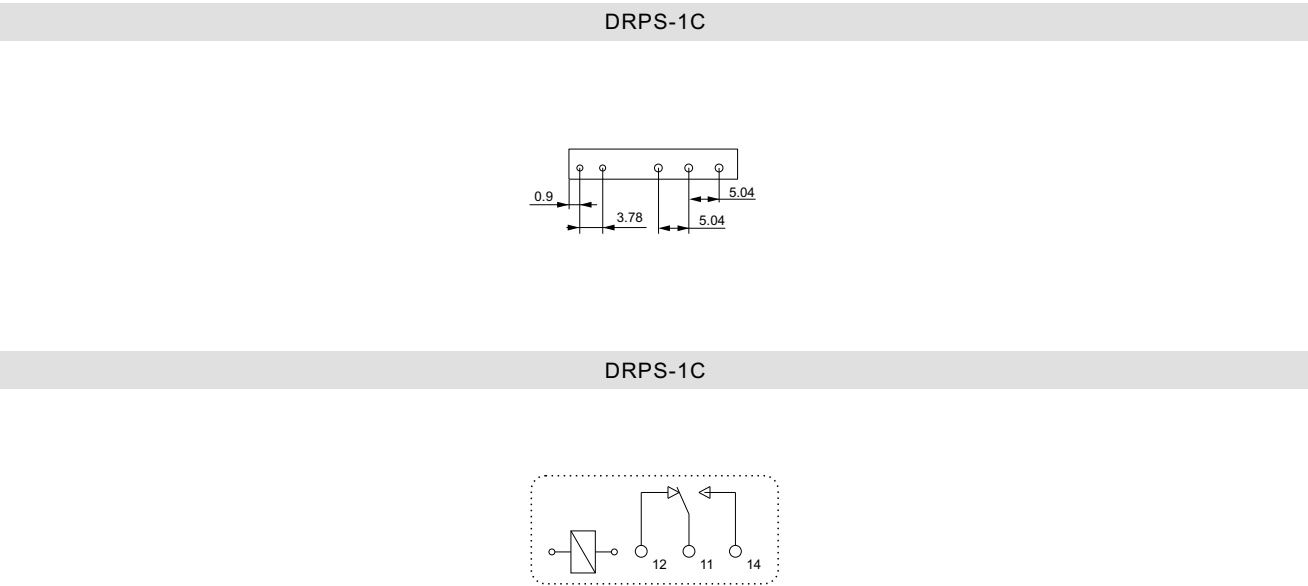



DRPS-1C-SSR-DXX/DXX

Features

- Transistor or MOSFET Output
- Optical Isolation
- Load Current : 0.1A , 3A
- Load Voltage: 24VDC or 48VDC
- PCB or Socket Mounted
- Dielectric Strength: 2500Vrms
- RoHS Compliant

Relay Combination Quickcheck

Relay	Socket	Assembled Input Voltage	Assembled Output Voltage	Assembled Output Current	Assembled Model-Screw	Assembled Model-Push-in	Turn-on Time	Turn-off Time
DRPS-1C-SSR-D24/D24/3-09Z(H)	Screw:DPSF05A-E1-00Z(H)	24VDC	24VDC	3A	DRPSS-1C-SSR-L-D24/D24/3-09Z(H)	DRPSP-1C-SSR-L-D24/D24/3-09Z(H)	18μs	100μs
DRPS-1C-SSR-D24/D48/0.1-09Z(H)	Push-in:DPRF05A-E1-00Z(H)	24VDC	48VDC	0.1A	DRPSS-1C-SSR-L-D24/D48/0.1-09Z(H)	DRPSP-1C-SSR-L-D24/D48/0.1-09Z(H)	10μs	150μs
DRPS-1C-SSR-D60/D24/3-09Z(H)	Screw:DPSF05B-E1-00Z(H)	220VAC	24VDC	3A	DRPSS-1C-SSR-L-A220/D24/3-09Z(H)	DRPSP-1C-SSR-L-A220/D24/3-09Z(H)	7ms	7ms
DRPS-1C-SSR-D60/D48/0.1-09Z(H)	Push-in:DPRF05B-E1-00Z(H)	220VAC	48VDC	0.1A	DRPSS-1C-SSR-L-A220/D48/0.1-09Z(H)	DRPSP-1C-SSR-L-A220/D48/0.1-09Z(H)	6ms	3ms

General Specifications

Input Specifications (Ta=25°C)

Rated Input Voltage	DC5V	DC12V	DC24V	DC48V	DC60V
Control Voltage Range	4-6VDC	9.6-14.4VDC	19.2-28.8VDC	38.4-57.6VDC	48-72VDC
Must Turn-on Voltage	4VDC	9.6VDC	19.2VDC	38.4VDC	48VDC
Must Turn-off Voltage	1VDC	2.4VDC	2.4VDC	4.8VDC	4.8VDC
Maximum Input Current	25mA (@6VDC)	25mA (@14.4VDC)	25mA (@28.8VDC)	20mA (@57.6VDC)	15mA (@72VDC)
Input Frequency	300Hz				300Hz (10Hz with AC socket)

Output Specifications (Ta=25°C)


Load Voltage Range	24V: 3-28VDC	48V: 3-58VDC
Maximum Transient Overvoltage	24V: 33VDC	48V: 58VDC
Load Current Range	0.1A: 0.001 - 0.1A	3A: 0.002 - 3A
Maximum Turn-on Time	300μs	
Maximum Turn-off Time	300μs	
Maximum Surge Current (@10 ms)	0.1A: 1A	3A: 30A
Maximum Off-State Leakage Current@Rated Load Voltage	100μA	
Maximum On-State Voltage Drop@Rated Current	0.1A: 1.5VDC	
Maximum On-State Resistance	2A/3A/4A: 37mΩ	

General Specifications (Ta=25°C)

Dielectric Strength (50/60Hz)	2500Vrms
Minimum Insulation Resistance (@500VDC)	1000MΩ
Ambient Temperature Range*	-30°C ~ +80°C
Storage Temperature Range	-30°C ~ +100°C
Weight (Typical)	4g


* Please contact our technical support if you need to use it for close installation.

DRPS-1C-SSR-D24/D24/3-09Z(H)

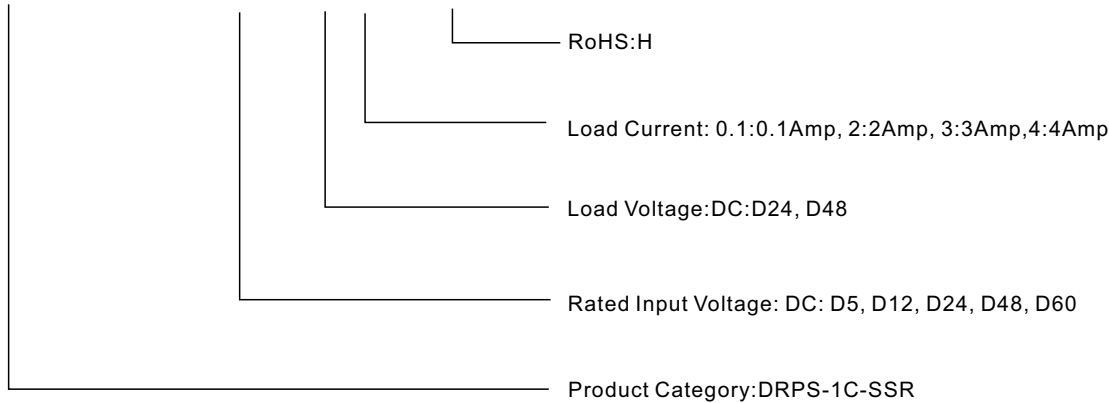


Overall Dimensions

DRPS-1C-SSR

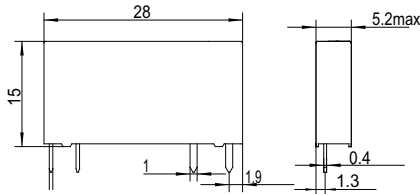





Wiring Diagrams

DRPS-1C-SSR



Note: When the relay is used for inductive load control, please be sure to use a suppression circuit, just like the drawing above. Both load terminals are inverse paralleled with a fly-wheel diode D1.D1: Fast Recovery Diode

Thermal Derating Curve

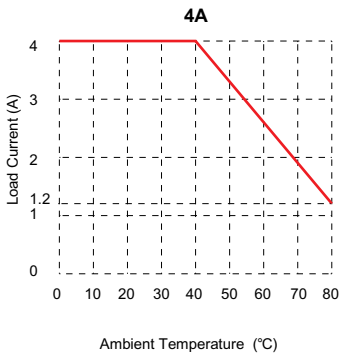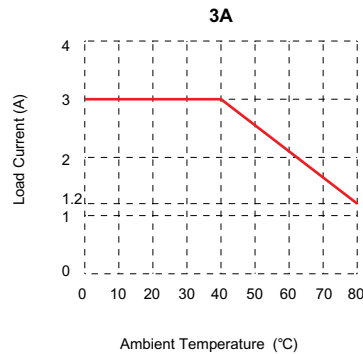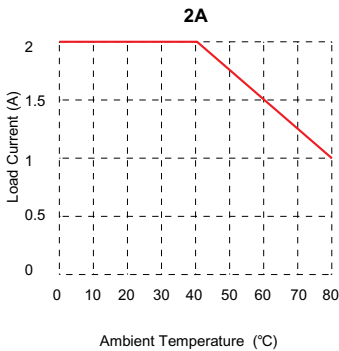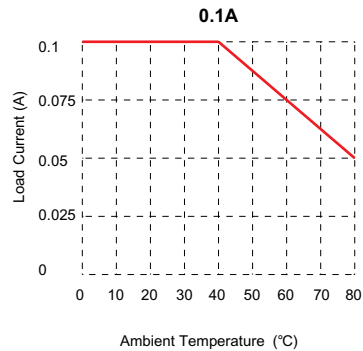



DRPS-1C-SSR Solid State Relay

DRPS-1C-SSR Solid State Relay

CE RoHS



DRPS-1C-SSR-DXX/AXX

Features

- Transistor or MOSFET Output
- Optical Isolation
- Load Current : 1A, 2A
- Load Voltage: 240VAC
- PCB or Socket Mounted
- Dielectric Strength: 2500Vrms
- RoHS Compliant

Relay Combination Quickcheck

Relay	Socket	Assembled Input Voltage	Assembled Output Voltage	Assembled Output Current	Assembled Model-Screw	Assembled Model-Push-in	Turn-on Time	Turn-off Time
DRPS-1C-SSR-D24/A240/1-09Z(H)	Screw:DPSF05A-E1-00Z(H) Push-in:DPRF05A-E1-00Z(H)	24VDC	240VAC	1A	DRPSS-1C-SSR-L-D24/A240/1-09Z(H)	DRPSP-1C-SSR-L-D24/A240/1-09Z(H)	1/2cycle+1ms	1/2cycle+1ms

General Specifications

Input Specifications (Ta=25°C)

Rated Input Voltage	DC5V	DC12V	DC24V
Control Voltage Range	4-6VDC	9.6-14.4VDC	19.2-28.8VDC
Must Turn-on Voltage	4VDC	9.6VDC	19.2VDC
Must Turn-off Voltage	1VDC		
Maximum Input Current	25mA (@6VDC)	25mA (@14.4VDC)	25mA (@28.8VDC)
Input Frequency	10Hz		

Output Specifications (Ta=25°C)

Load Voltage Range	24V-280VAC
Maximum Transient Overvoltage	600Vpk
Load Current Range	1A: 0.01 - 1A 2A: 0.1 - 2A
Maximum Turn-on Time	1/2cycle+1ms
Maximum Turn-off Time	1/2cycle+1ms
Maximum Surge Current (@10 ms)	1A: 30A 2A: 40A
Maximum Off-State Leakage Current@Rated Load Voltage	1.5mA
Maximum On-State Voltage Drop@Rated Current	1.5Vrms
Minimum Off-State dv/dt @ Maximum Rated Voltage	200V/μs

General Specifications (Ta=25°C)

Dielectric Strength (50/60Hz)	2500Vrms
Minimum Insulation Resistance (@500VDC)	1000MΩ
Ambient Temperature Range*	-30°C ~ +80°C
Storage Temperature Range	-30°C ~ +100°C
Weight (Typical)	4g


* Please contact our technical support if you need to use it for close installation.



DRPS-1C-SSR Solid State Relay


Model Order

DRPS-1C-SSR-D24/A240/1-09Z(H)

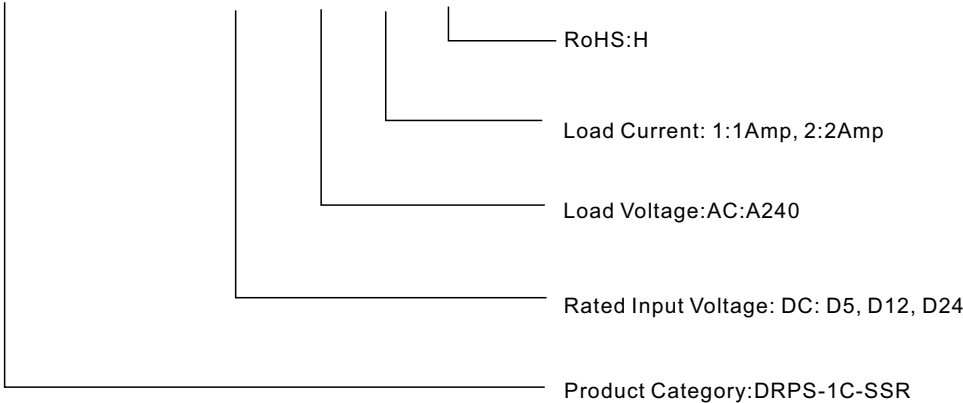


Overall Dimensions

DRPS-1C-SSR


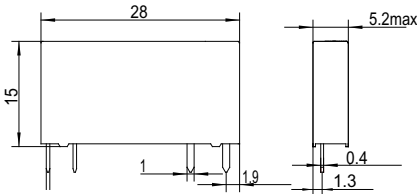


Wiring Diagrams

DRPS-1C-SSR



Thermal Derating Curve

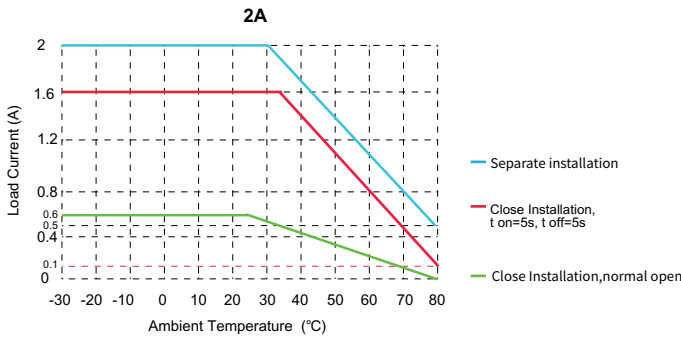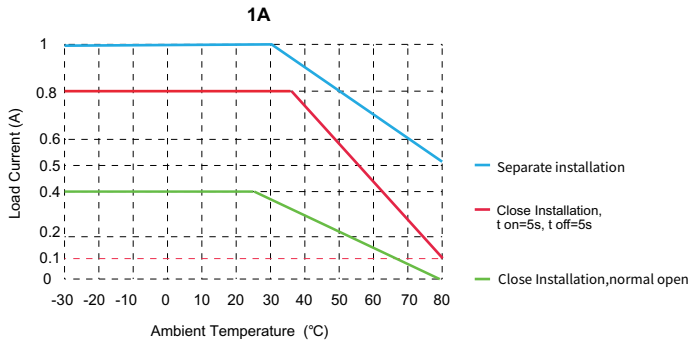



DPSF

Features

- Protective socket,6A.
- Screw connection.
- Green product **RoHS**.

DPSF 05X-E 1-00Z(H)

Product Category:DPSF

Voltage Type: 05A:12-24VAC/DC
05B:220-240VAC/DC
05D:48-60VAC/DC
05E:110-125VAC/DC
05W:90-240VAC/DC

Protect way:E: Protective structure

Colour:1:Grey

RoHS:H

Performance Parameters

Technical parameters





Product type	DPSF05X-E1
Rated current	6A
Rated voltage	277V
Coil/Contact dielectric voltage	4000V/S
Dielectric voltage between contact	2500V/S
Screw torque	0.5Nm
External connection wire	20-16AWG/0.5-1.5mm ²
Ambient temperature	-40~+70°C
Weight	26g

Supporting relays and accessories

Product type	Relay	Brige	Markers
DPSF05A-E1	DRPS-1C-D12/D24	DBA20-6-12-00Z(H) Color: blue	 ZS6
DPSF05B-E1/DPSF05E-E1	DRPS-1C-D60	DBA20-6-13-00Z(H) Color: black	
DPSF05D-E1	DRPS-1C-D48/D60	DBA20-6-16-00Z(H) Color: red	
DPSF05W-E1	DRPS-1C-D24		
Popular Assembled module		24VDC: DRPSS-1C-L-D24-06Z(H)	220/230VAC: DRPSS-1C-L-A220-06Z(H)

Overall Dimensions, Wiring Diagrams

DPSF05X-E1

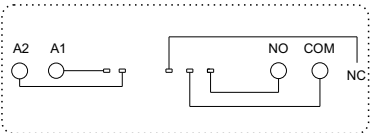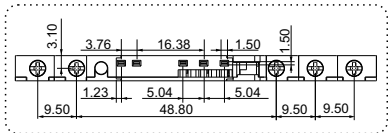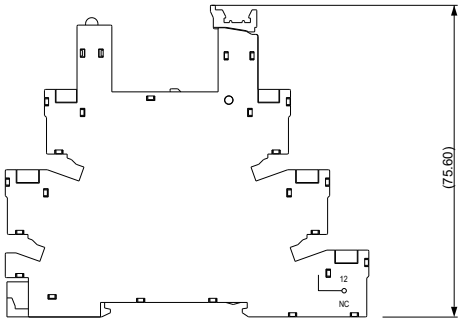

DPRF

Features

- Protective socket,6A.
- Push-in connection.
- Green product **RoHS**.

DPRF 05X-E 1-00Z(H)

Product Category:DPRF

Voltage Type: 05A:12-24VAC/DC
05B:220-240VAC/DC
05D:48-60VAC/DC
05E:110-125VAC/DC
05W:90-240VAC/DC

Protect way:E: Protective structure

Colour:1:Grey

RoHS:H

Performance Parameters

Technical parameters





Product type	DPRF05X-E1
Rated current	6A
Rated voltage	300V
Coil/Contact dielectric voltage	4000V/S
Dielectric voltage between contact	2500V/S
External connection wire	22-14AWG/0.25-2.5mm ²
Ambient temperature	-40~+70°C
Weight	23.5g

Supporting relays and accessories

Product type	Relay	Brige	Markers
DPRF05A-E1	DRPS-1C-D12/D24	DBA20-6-12-00Z(H) Color: blue	 ZS6
DPRF05B-E1/DPRF05E-E1	DRPS-1C-D60	DBA20-6-13-00Z(H) Color: black	
DPRF05D-E1	DRPS-1C-D48/D60	DBA20-6-16-00Z(H) Color: red	
DPRF05W-E1	DRPS-1C-D24		
Popular Assembled module		24VDC: DRPSP-1C-L-D24-06Z(H)	220/230VAC: DRPSP-1C-L-A220-06Z(H)

Overall Dimensions, Wiring Diagrams

DPRF05X-E1

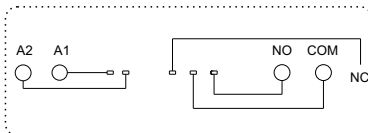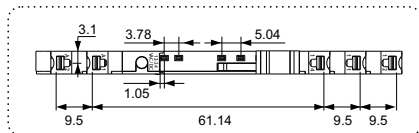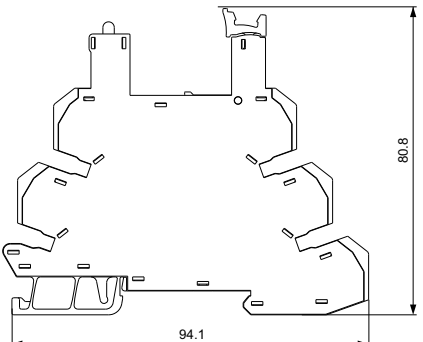



DRPB-1C

DRPB-1CH/DRPB-2C

Features

- Small size, 1C:12A, 1CH:16A, 2C:8A switching power.
- Multiple sockets optional.
- Green product RoHS.

Performance Parameters

Contact parameters

Contact form	1C, 1CH, 2C
Contact material	Ag alloy
Resistive load	1C: 12A 1CH: 16A@277VAC/30VDC 2C: 8A@277VAC/30VDC
Motor load	1CH: 1/3HP@240VAC 2C: 1/6HP@240VAC
Switch power	1CH: 4000VA, 480W 2C: 2000VA, 240W
Contact resistance (Initial)	<50mΩ
Electrical life (1.5s on/1.5s off)	>1×10 ⁵ (1200 Ops/h)
Mechanical life (300cycles/min)	>1×10 ⁷ (18000 Ops/h)


Coil parameters

Rated voltage (DC)	DC6V	DC12V	DC24V	DC48V
Rated resistance (±10%)	90Ω	360Ω	1440Ω	5760Ω
Operate voltage	DC: ≤75% (Rated voltage)			
Release voltage	DC: ≥5% (Rated voltage)			
Max input voltage	110% (Rated voltage)			
Coil power	0.40W			
Operate time	<20ms			
Release time	<10ms			

Universal parameters

Insulation resistance	1000MΩ(500VDC)
Dielectric voltage	
Between contacts	1000VAC/1min
Between contacts (different pole)	3000VAC/1min
Between contacts and coil	5000VAC/1min
Shock withstanding	10G (Half sine wave pulse 11ms)
Vibration withstanding	10-55Hz (Double amplitude 1.0mm)
Ambient temperature	-25...+70°C
Ambient humidity	35%~80%RH
Weight	17g
Matching socket	1C: DSRC05A series ; 1CH/2C: DSRC08A series


DRPB - 2C - D24 - 06Z(H)

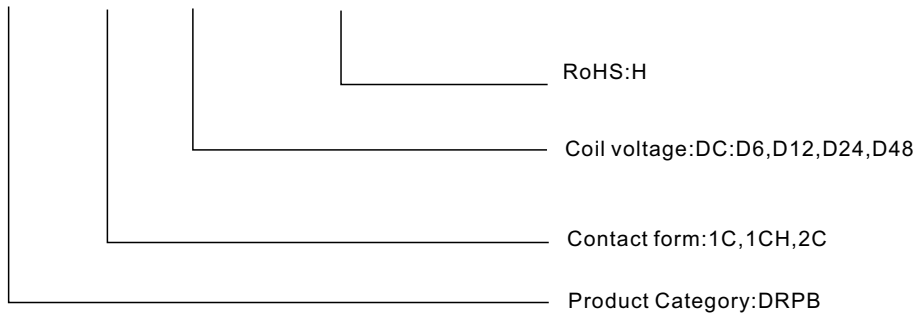

Overall Dimensions

DRPB-1C

DRPB-1CH/2C

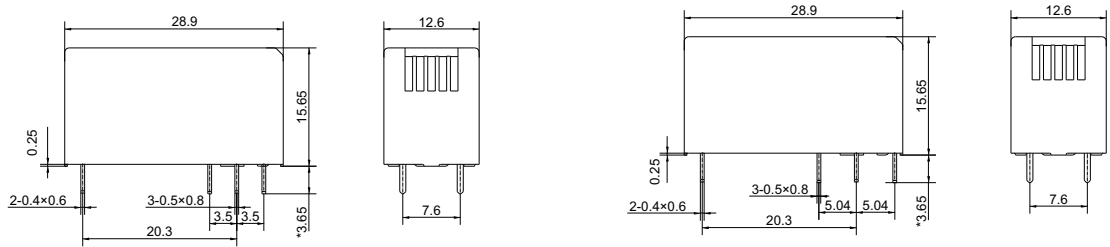


Installation Diagrams, Wiring Diagrams

DRPB-1C

DRPB-1CH


DRPB-2C

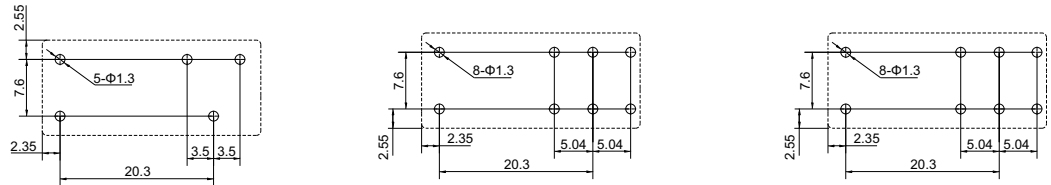

DRPB-1C

DRPB-1CH

DRPB-2C





DRPB-1C-SSR-DXX/DXX

Features

- Load Current: 2A, 3A, 4A, 5A
- Control Voltage: 5VDC, 12VDC, 24VDC
- Dielectric Strength: 2500Vrms
- MOSFET Output
- PCB Mounted
- Optional socket, rail mounting
- RoHS Compliant

Relay Combination Quickcheck

Relay	Socket	Assembled Input Voltage	Assembled Output Voltage	Assembled Output Current	Assembled Model-Screw	Assembled Model-Push-in	Turn-on Time	Turn-off Time
DRPB-1C-SSR-D24/D24/5-09Z(H)	Screw:DSRC08A-F3-00Z(H) Push-in:DPRC08A-F3-00Z(H)	24VDC	24VDC	5A	DRPBS-1C-SSR-L-D24/D24/5-09Z(H)	DRPBP-1C-SSR-L-D24/D24/5-09Z(H)	20µs	150µs

General Specifications

Input Specifications (Ta=25°C)

Rated Input Voltage	DC5V	DC12V	DC24V	DC48V	DC60V
Control Voltage Range	4-6VDC	9.6-14.4VDC	19.2-28.8VDC	38.4-57.6VDC	48-72VDC
Must Turn-on Voltage	4VDC	9.6VDC	19.2VDC	38.4VDC	48VDC
Must Turn-off Voltage	1VDC	1VDC	1VDC	1VDC	1VDC
Maximum Input Current	25mA (@6VDC)	25mA (@14.4VDC)	25mA (@28.8VDC)	25mA (@57.6VDC)	25mA (@72VDC)
Input Frequency	300Hz				300Hz (10Hz with AC socket)


Output Specifications (Ta=25°C)

Load Voltage Range	24V: 0-28.8VDC 48V: 0-36VDC			
Maximum Transient Overvoltage	24V: 60Vpk 48V: 75Vpk			
Load Current Range	2A: 0.02 - 2A	3A: 0.02 - 3A	4A: 0.02 - 4A	5A: 0.02 - 5A
Internal TVS Protection	24V: 37.1-41VDC 48V: 64.6-71.4VDC			
Maximum Turn-on Time	1ms			
Maximum Turn-off Time	1ms			
Maximum Surge Current (@10 ms)	2A: 20Apk	3A: 30Apk	4A: 40Apk	5A: 50Apk
Maximum Off-State Leakage Current@Rated Load Voltage	0.1A			
Maximum On-State Voltage Drop@Rated Current	0.3VDC			

General Specifications (Ta=25°C)


Dielectric Strength (50/60Hz)	2500Vrms
Minimum Insulation Resistance (@500VDC)	1000MΩ
Ambient Temperature Range	-30°C ~ +80°C
Storage Temperature Range	-30°C ~ +100°C
Weight (Typical)	15g

DRPB-1C-SSR-D24/D24/5-09Z(H)

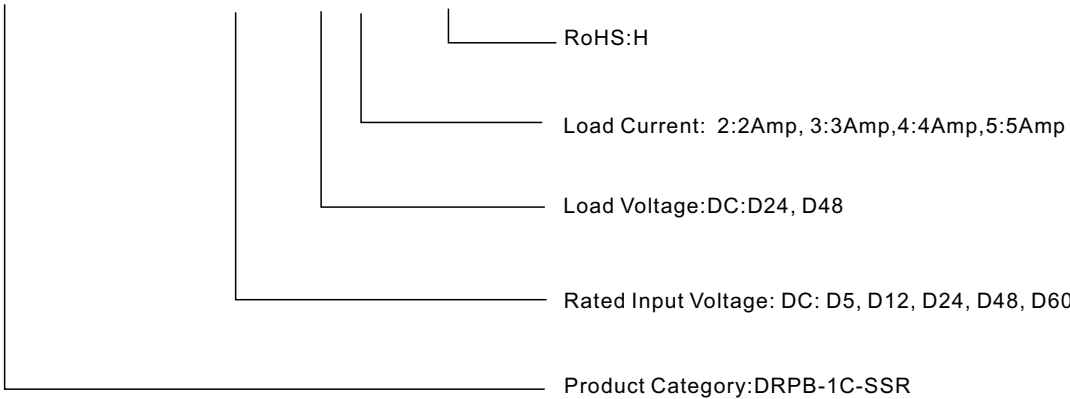


Overall Dimensions

DRPB-1C-SSR




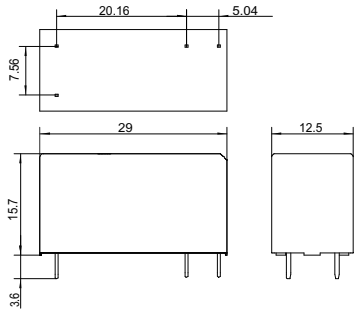


Wiring Diagrams

DRPB-1C-SSR

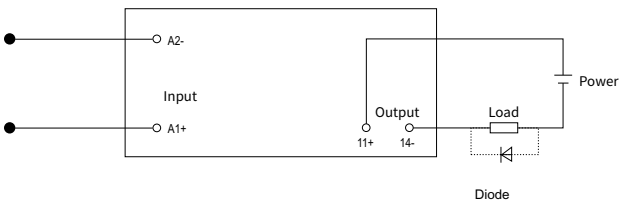

Thermal Derating Curve

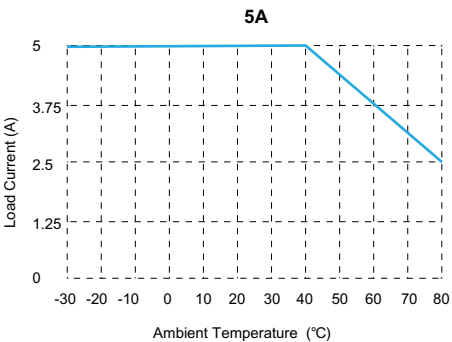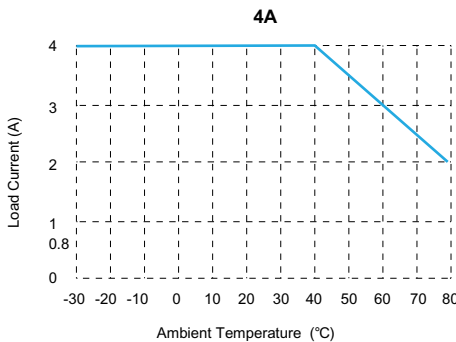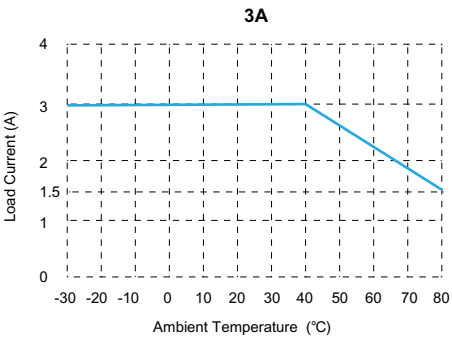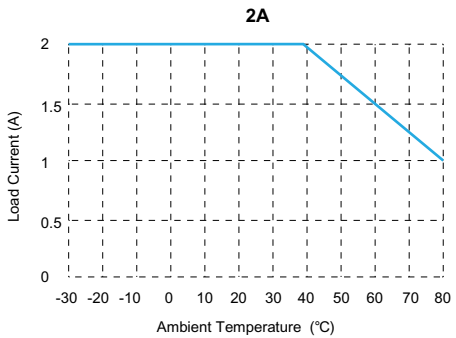



DRPB-1C-SSR-DXX/AXX

Features

- Zero crossing Switching
- Load Current: 2A, 3A
- Control Voltage: 5VDC, 12VDC, 24VDC
- Internal RC Absorption Circuit
- Dielectric Strength: 4000Vrms
- TRIAC Output
- PCB Mounted
- Optional socket, rail mounting
- RoHS Compliant

Relay Combination Quickcheck

Relay	Socket	Assembled Input Voltage	Assembled Output Voltage	Assembled Output Current	Assembled Model-Screw	Assembled Model-Push-in	Turn-on Time	Turn-off Time
DRPB-1C-SSR-D24/A240/3-09Z(H)	Screw:DSRC08A-F3-00Z(H) Push-in:DPRC08A-F3-00Z(H)	24VDC	240VAC	3A	DRPBS-1C-SSR-L-D24/A240/3-09Z(H)	DRPBP-1C-SSR-L-D24/A240/3-09Z(H)	1/2cycle+1ms	1/2cycle+1ms

General Specifications

Input Specifications (Ta=25°C)

Rated Input Voltage	DC5V	DC12V	DC24V
Control Voltage Range	4-6VDC	9.6-14.4VDC	19.2-28.8VDC
Must Turn-on Voltage	4VDC	9.6VDC	19.2VDC
Must Turn-off Voltage	1VDC	1VDC	1VDC
Maximum Input Current	25mA (@6VDC)	25mA (@14.4VDC)	25mA (@28.8VDC)
Input Frequency	10Hz		


Output Specifications (Ta=25°C)

Load Voltage Range	240VAC: 24V-280VAC	380VAC: 24V-440VAC
Maximum Transient Overvoltage	240V: 600Vpk	380V: 800Vpk
Load Current Range	2A: 0.01 - 2A	3A: 0.1 - 3A
Maximum Turn-on Time	Zero Crossing: 1/2cycle+1ms	
Maximum Turn-off Time	1/2cycle+1ms	
Maximum Surge Current (@10 ms)	2A: 30Apk	3A: 120Apk
Maximum Off-State Leakage Current@Rated Load Voltage	5mA	
Maximum On-State Voltage Drop@Rated Current	1.5Vrms	
Minimum Off-State dv/dt @ Maximum Rated Voltage	200V/μs	
Operational Frequency Range	47-63Hz	
Minimum Power Factor (@ Maximum load)	0.5	

General Specifications (Ta=25°C)


Dielectric Strength (50/60Hz)	4000Vrms
Minimum Insulation Resistance (@500VDC)	1000MΩ
Ambient Temperature Range	-30°C ~ +80°C
Storage Temperature Range	-30°C ~ +100°C
Weight (Typical)	15g

DRPB-1C-SSR-D24/A240/3-09Z(H)

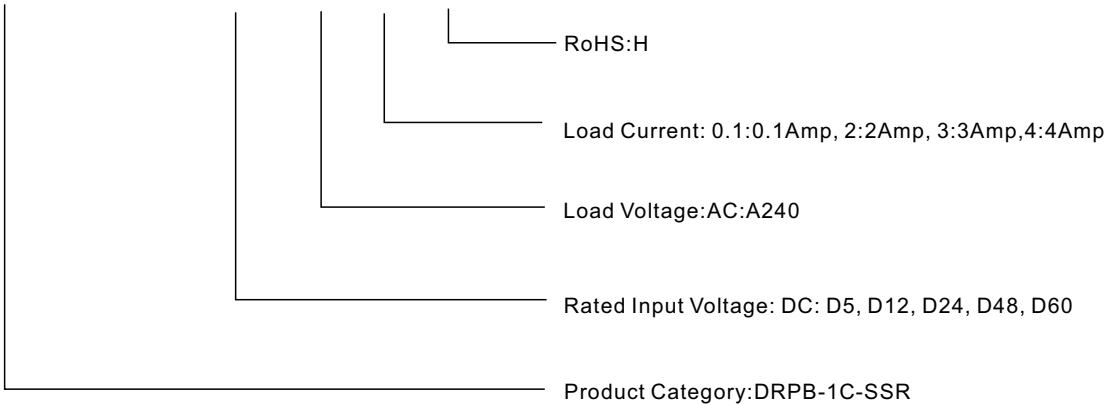


Overall Dimensions

DRPB-1C-SSR


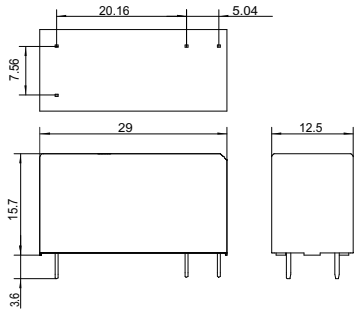


Wiring Diagrams

DRPB-1C-SSR

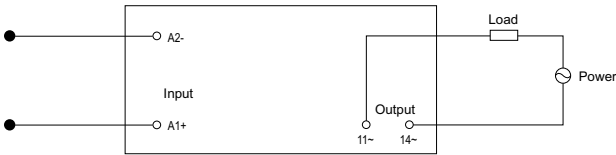

Thermal Derating Curve

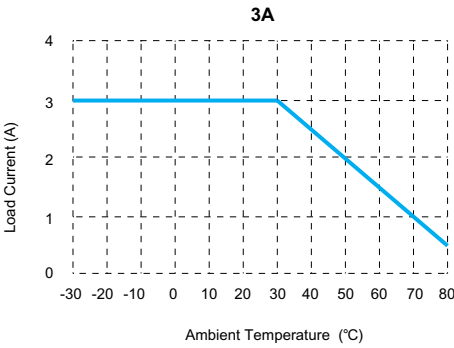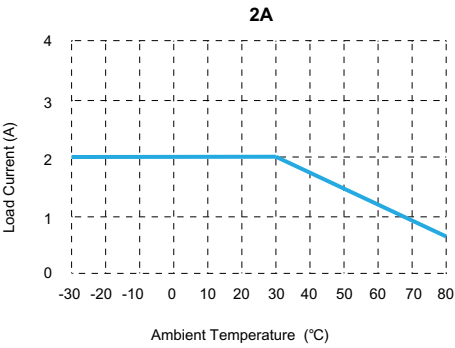



DSRC05A-F3

DSRC08A-F3

Features

- Separable socket,05A:12A,08A:10A.
- Green product RoHS.

DSRC 08A-F 3-00Z(H)

Product Category:DSRC

Pin Number:05A,08A

Protect way:F:Separable structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DSRC05A-F3	DSRC08A-F3
Rated current	12A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	2500V/S	
Dielectric voltage between contact	2500V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+65°C	
Weight	22g	27g

Supporting relays and accessories



Product type	Relay	Module	Plastic pull clasp	Brige
DSRC05A-F3	DRPB-1C	DMD	Wear	DFB2-15-13-00Z(H) Color: black
DSRC08A-F3	DRPB-1CH / DRPB-2C	DMD	Wear	

Popular Assembled module	24VDC 1×SPDT: DRPBS-1CH-LD-D24-06Z(H)	24VDC 2×SPDT: DRPBS-2C-LD-D24-06Z(H)
--------------------------	---------------------------------------	--------------------------------------

Overall Dimensions, Wiring Diagrams

DSRC05A-F3

DSRC08A-F3

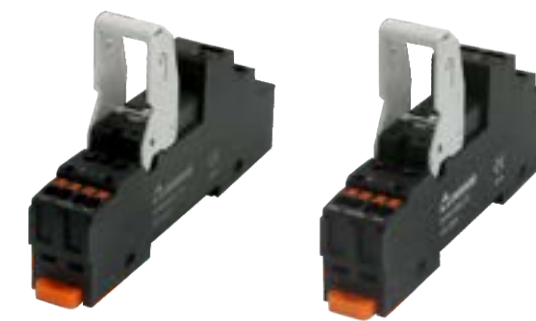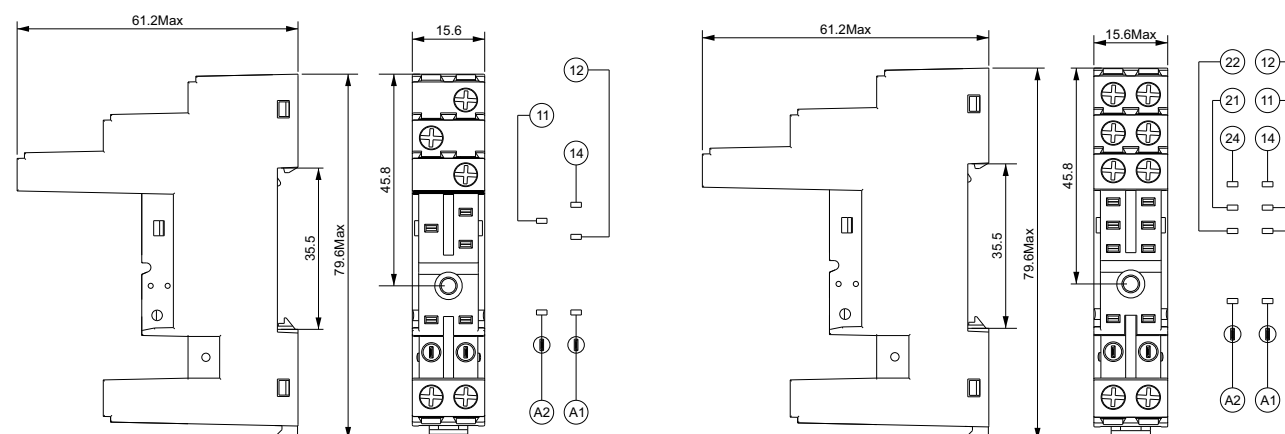

DPRC05A-F3

DPRC08A-F3

Features

- Protective socket,05A:12A,08A:10A.
- Push-in connection
- Green product RoHS.

DPRC 08A-F 3-00Z(H)

Product Category:DPRC

Pin Number:05A,08A

Protect way:F:Separable structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPRC05A-F3	DPRC08A-F3
Rated current	12A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	4000V/S	
Dielectric voltage between contact	2500V/S	
External connection wire	22-14AWG/0.25-2.5mm ²	
Ambient temperature	-45~+85°C	
Weight	36g	42.6g

Supporting relays and accessories


Product type	Relay	Module	Plastic pull clasp	Bridge
DPRC05A-F3	DRPB-1C	DMD	Wear	DFB2-13-16-00Z(H) Color: red DFB2-13-12-00Z(H) Color: blue
DPRC08A-F3	DRPB-1CH / DRPB-2C	DMD	Wear	DFB2-13-13-00Z(H) Color: black

Popular Assembled module	24VDC 1×SPDT: DRBPB-1CH-LD-D24-06Z(H)	24VDC 2×SPDT: DRBPB-2C-LD-D24-06Z(H)
--------------------------	---------------------------------------	--------------------------------------

Overall Dimensions, Wiring Diagrams

DPRC05A-F3

DPRC08A-F3

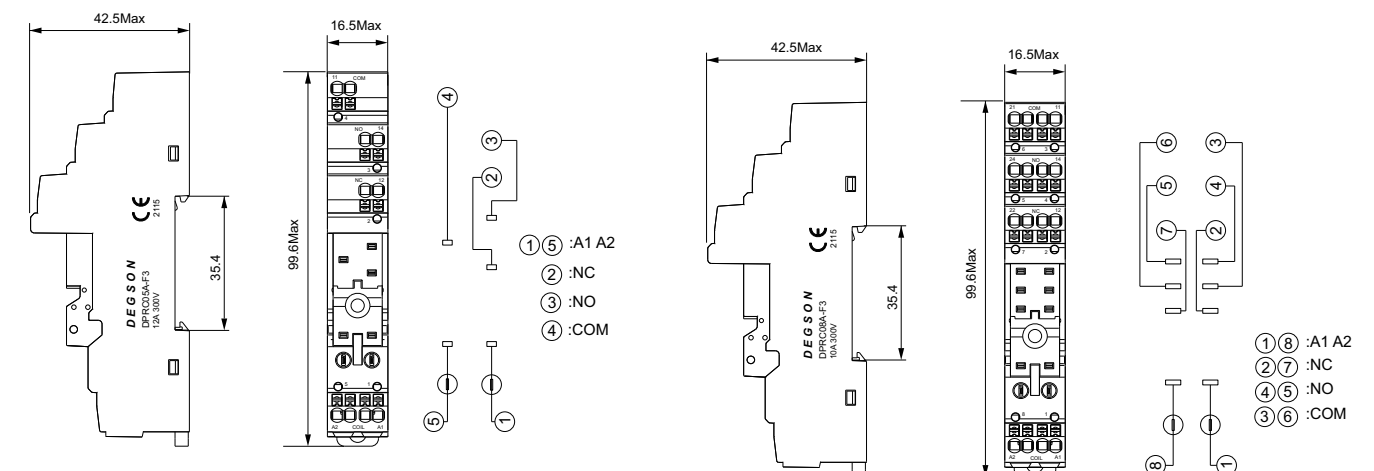

DRPT Power Relay



DRPT-1C



DRPT-2C

Features

- Small size, 1C:12A, 2C:8A switching power.
- Multiple sockets optional.
- With test button ,diode and LED.
- Green product RoHS .

Performance Parameters

Contact parameters

Contact form	1C,2C	
Contact material	Ag alloy	
Resistive load	1C:12A@277VAC/30VDC	2C:8A@277VAC/30VDC
Motor load	1C:1/2HP@250VAC	2C:1/3HP@250VAC
Switch power	1C:3324VA/360W	2C:2216VA/240W
Contact resistance(Initial)	≤100mΩ	
Electrical life(1s on/1s off)	>1x10 ⁵ (1800 Ops/h)	
Mechanical life(300cycles/min)	>1x10 ⁷ (18000 Ops/h)	

Coil parameters


Rated voltage (DC)	DC6V	DC12V	DC24V	DC48V	DC110V	
Rated resistance(±10%)	68Ω	272Ω	1087Ω	4347Ω	22830Ω	
Rated voltage (AC)	AC6V	AC12V	AC24V	AC48V	AC100-110V	AC220-240V
Rated resistance(±10%)	15.8Ω	63Ω	252Ω	1008Ω	5294Ω	23144Ω
Operate voltage	DC:≤75%(Rated voltage);AC:≤80%(Rated voltage)					
Release voltage	DC:≥10%(Rated voltage);AC:≥30%(Rated voltage)					
Max input voltage	110%(Rated voltage)					
Coil power	0.53W/0.8-1.0VA					
Operate time	<20ms					
Release time	<10ms					

Universal parameters


Insulation resistance	1000MΩ(500VDC/min)
Dielectric voltage	
Between contacts	1000VAC/1min
Between contacts(different pole)	1000VAC/1min
Between contacts and coil	5000VAC/1min
Shock withstanding	10G(Half sine wave pulse 11ms)
Vibration withstanding	10-55Hz(Double amplitude 1.0mm)
Ambient temperature	-40...+85°C
Ambient humidity	45%~75%RH
Weight	25g
Matching socket	1C:DSRT05A series ; 2C:DSRT08A series

Model Order


DRPT – 2C – LR – D24 – 02Z(H)

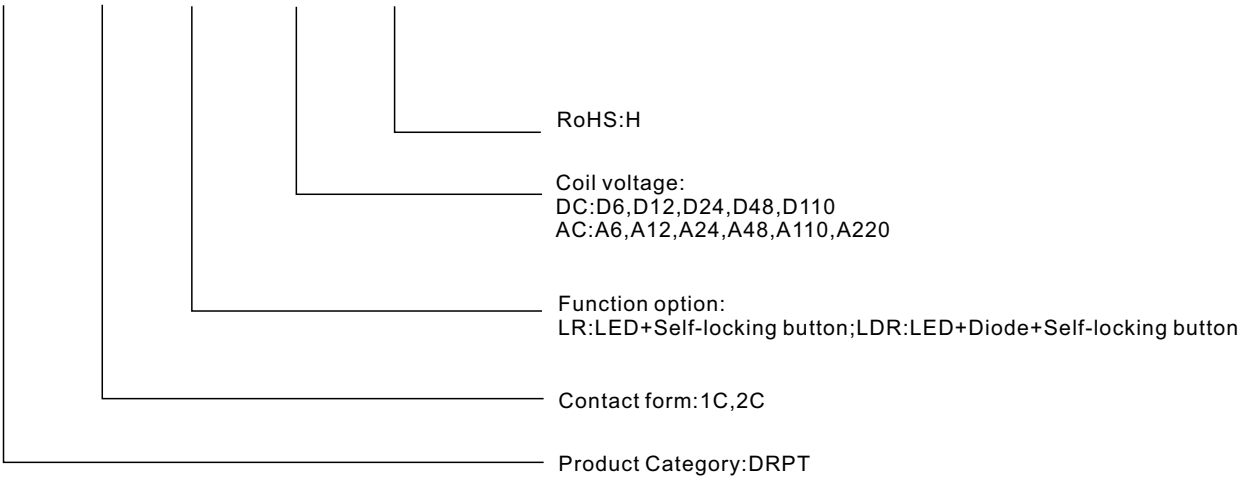

Overall Dimensions

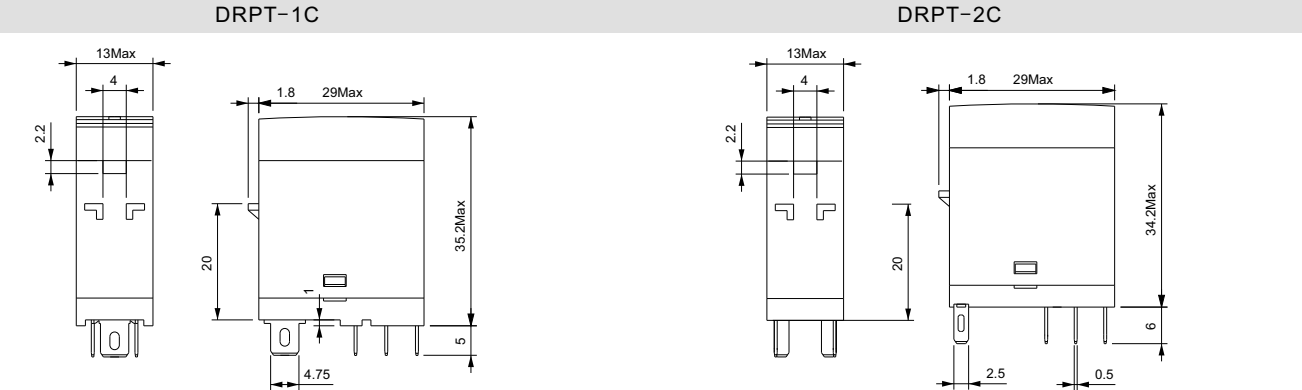

Installation Diagrams, Wiring Diagrams

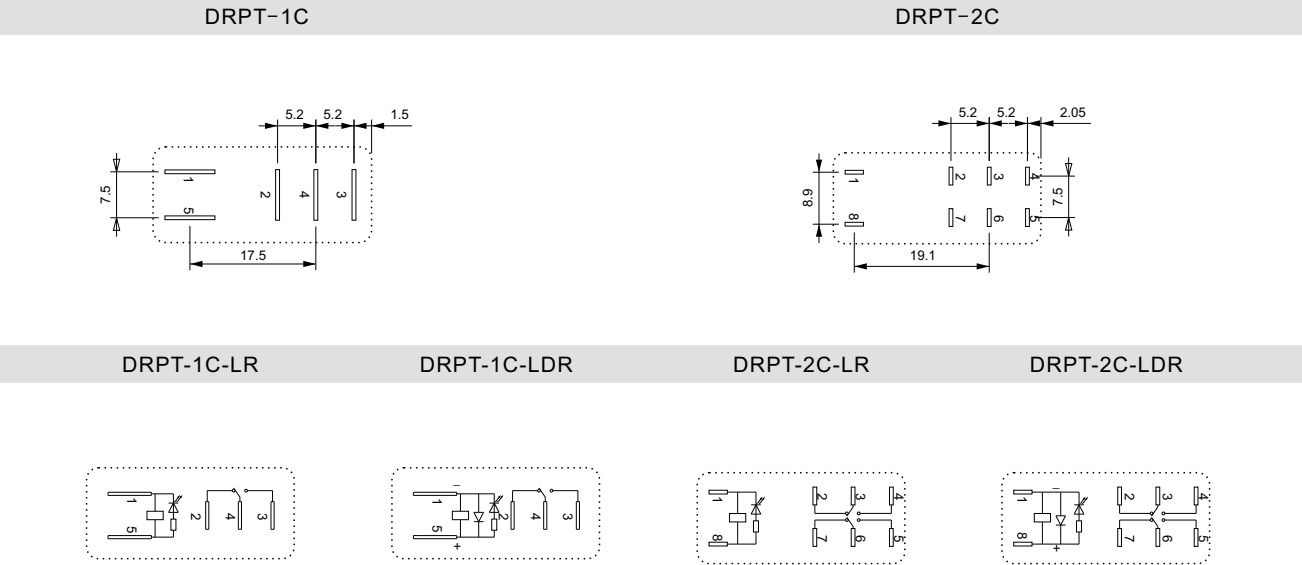



DSRT05A-3

DSRT08A-3

Features

- General socket,05A:16A,08A:10A.
- Green product RoHS.

DSRT 08A-3-00Z(H)

Product Category:DSRT

Pin Number:05A,08A

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DSRT05A-3	DSRT08A-3
Rated current	16A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	4000V/S	
Dielectric voltage between contact	2500V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-45~+85°C	
Weight	22g	27g



Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Brige
DSRT05A-3	DRPT-1C	—	Wear	DFJ8-16-13-00Z(H) Color: black
DSRT08A-3	DRPT-2C	—	Wear	

Overall Dimensions, Wiring Diagrams

DSRT05A-3

DSRT08A-3

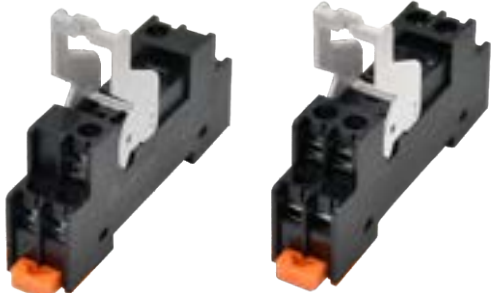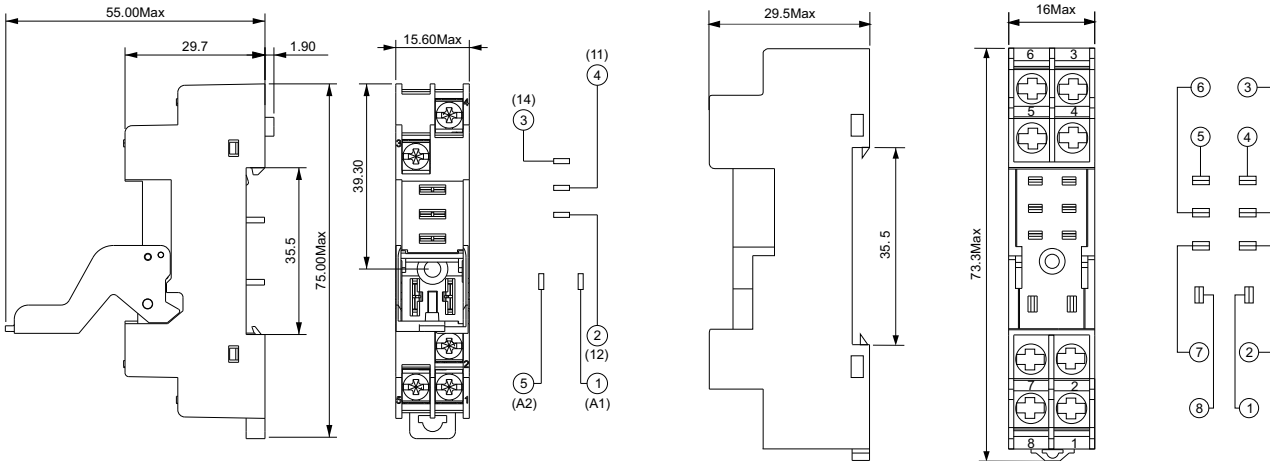

DSRT05A-E3

DSRT08A-E3

Features

- Protective socket,05A:16A,08A:10A.
- Green product RoHS.

DSRT 08A-E 3-00Z(H)

Product Category:DSRT

Pin Number:05A,08A

Protect way:E:Protective structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DSRT05A-E3	DSRT08A-E3
Rated current	16A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	2000V/S	
Dielectric voltage between contact	2000V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+65°C	
Weight	22g	27g

Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Brige
DSRT05A-E3	DRPT-1C	—	Wear	DFJ8-16-13-00Z(H) Color: black
DSRT08A-E3	DRPT-2C	—	Wear	

Popular Assembled module


24VDC 1×SPDT: DRPTS-1C-LR-D24-02Z(H)
24VDC 2×SPDT: DRPTS-2C-LR-D24-02Z(H)

220/230VAC 1×SPDT: DRPTS-1C-LR-A220-02Z(H)
220/230VAC 2×SPDT: DRPTS-2C-LR-A220-02Z(H)

Overall Dimensions, Wiring Diagrams

DSRT05A-E3

DSRT08A-E3

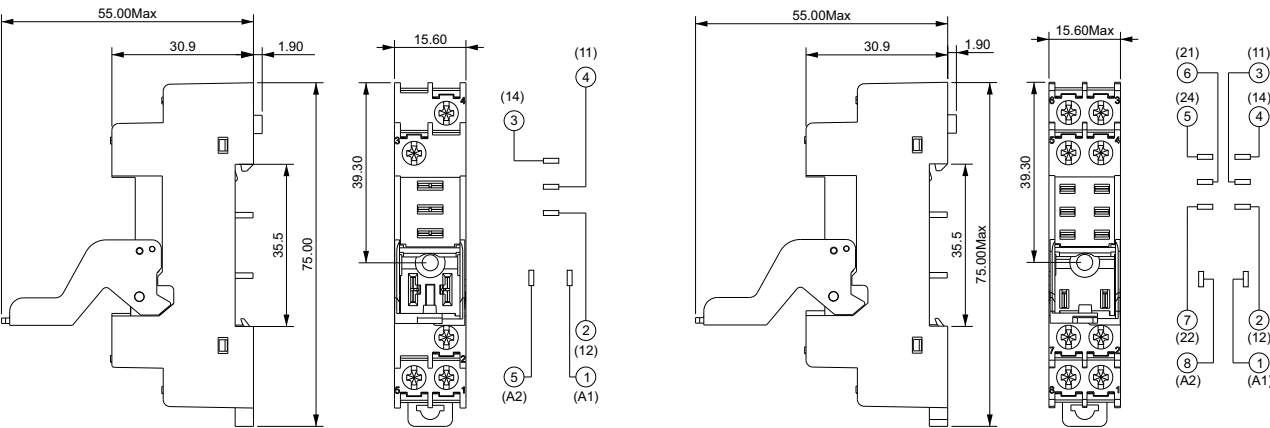



DSRT Relay Socket

DSRT Relay Socket

UL US CE RoHS



Features

- Separable socket,05A:16A,08A:10A.
- Green product RoHS.

Product Category:DSRT
Pin Number:05A,08A
Protect way:F:Separable structure
Colour:3:Black
RoHS:H

DSRT 08A-F 3-00Z(H)

Performance Parameters


Technical parameters

Product type	DSRT05A-F3	DSRT08A-F3
Rated current	16A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	4000V/S	
Dielectric voltage between contact	2500V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-45~+85°C	
Weight	22g	27g

Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Brige
DSRT05A-F3	DRPT-1C	DMD	Wear	DFB2-15-13-00Z(H) Color: black
DSRT08A-F3	DRPT-2C	DMD	Wear	

Overall Dimensions, Wiring Diagrams

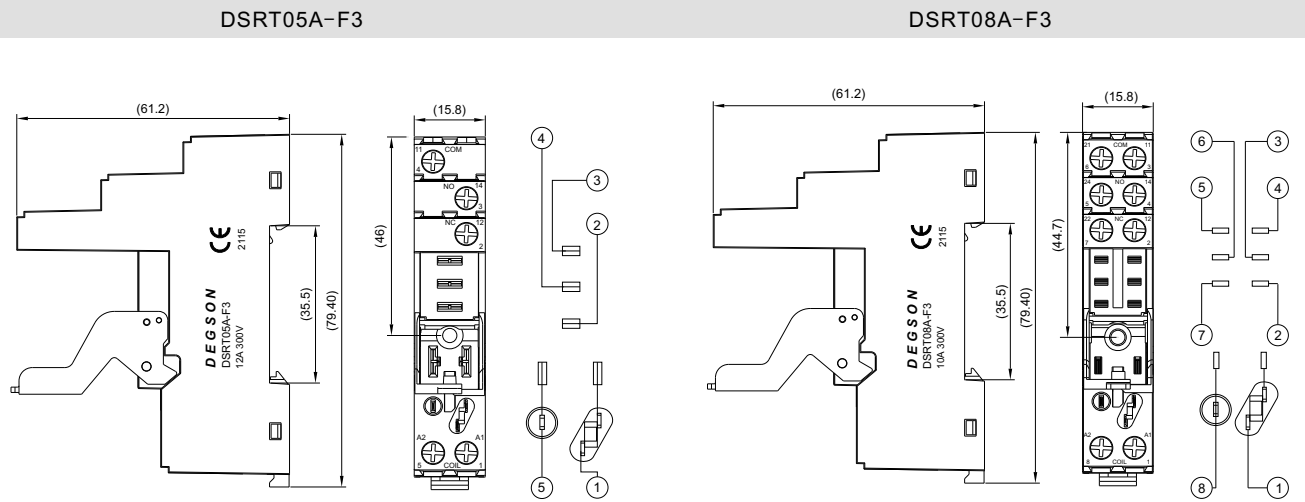

DPRT Relay Socket

DPRT Relay Socket

UL US CE RoHS



Features

- Push-in connection, general socket,05A:16A,08A:10A.
- Green product RoHS.

Product Category:DPRT
Pin Number:05A,08A
Protect way:F:Separable structure
Colour:3:Black
RoHS:H

DPRT 08A-F 3-00Z(H)

Performance Parameters

Technical parameters


Product type	DPRT05A-F3	DPRT08A-F3
Rated current	16A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	4000V/S	
Dielectric voltage between contact	2500V/S	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-45~+85°C	
Weight	32g	42g

Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Bridge
DPRT05A-F3	DRPT-1C	DMD	Wear	DFB2-13-16-00Z(H) Color: red DFB2-13-12-00Z(H) Color: blue
DPRT08A-F3	DRPT-2C	DMD	Wear	DFB2-13-13-00Z(H) Color: black

Popular Assembled module	24VDC 1×SPDT: DRPTP-1C-LR-D24-02Z(H) 24VDC 2×SPDT: DRPTP-2C-LR-D24-02Z(H)	220/230VAC 1×SPDT: DRPTP-1C-LR-A220-02Z(H) 220/230VAC 2×SPDT: DRPTP-2C-LR-A220-02Z(H)
--------------------------	--	--

Overall Dimensions, Wiring Diagrams

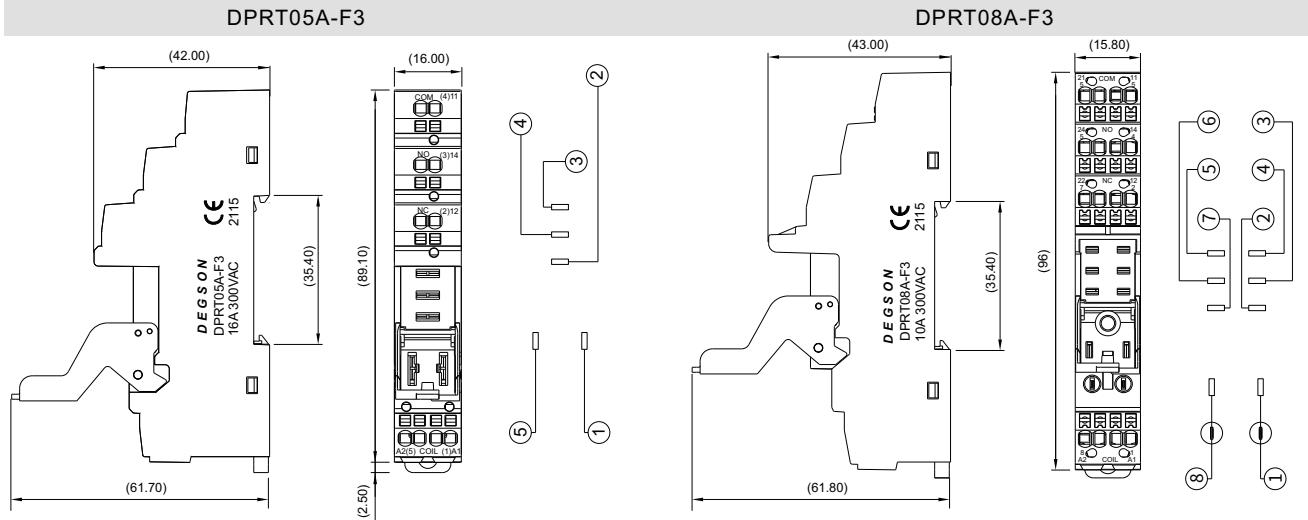



DRPE-2CH



DRPE-4C

Features

- Small size,2CH:10A,4C:5A switching power.
- Multiple sockets optional.
- With test button and instruction window.
- Green product RoHS.

Performance Parameters

Contact parameters

Contact form	2CH,4C	
Contact material	Ag alloy	
Resistive load	2CH:10A@240VAC/28VDC	4C:5A@240VAC/28VDC
Switch power	2CH:2400VA/280W	4C:1200VA/140W
Contact resistance(Initial)	<50mΩ	
Electrical life(1s on/1s off)	>1x10 ⁵ (1800 Ops/h)	
Mechanical life(300cycles/min)	>1x10 ⁷ (18000 Ops/h)	


Coil parameters

Rated voltage (DC)	DC12V	DC24V	DC48V	DC110V	DC220V	
Rated resistance(±10%)	160Ω	640Ω	2560Ω	13000Ω	53777Ω	
Rated voltage (AC)	AC24V	AC48V	AC110V	AC220V	AC380V	
Rated resistance(±10%)	168Ω	672Ω	3529Ω	14116Ω	42116Ω	
Operate voltage	DC:≤75%(Rated voltage);AC:≤80%(Rated voltage)					
Release voltage	DC:≥10%(Rated voltage);AC:≥30%(Rated voltage)					
Max input voltage	110%(Rated voltage)					
Coil power	0.9W/1.2VA					
Operate time	<20ms					
Release time	<20ms					

Universal parameters


Insulation resistance	1000MΩ(500VDC)
Dielectric voltage	
Between contacts	1000VAC/1min
Between contacts(different pole)	1500VAC/1min
Between contacts and coil	1500VAC/1min
Shock withstanding	10G(Half sine wave pulse 11ms)
Vibration withstanding	10-55Hz(Double amplitude 1.0mm)
Ambient temperature	-25...+55°C
Ambient humidity	45%~75%RH
Weight	35g
Matching socket	2CH:DPYF08A series DPKF08A series ; 4C:DPYF14A series DPKF14A series

DRPE - 2CH -LR - D24 - 07Z(H)

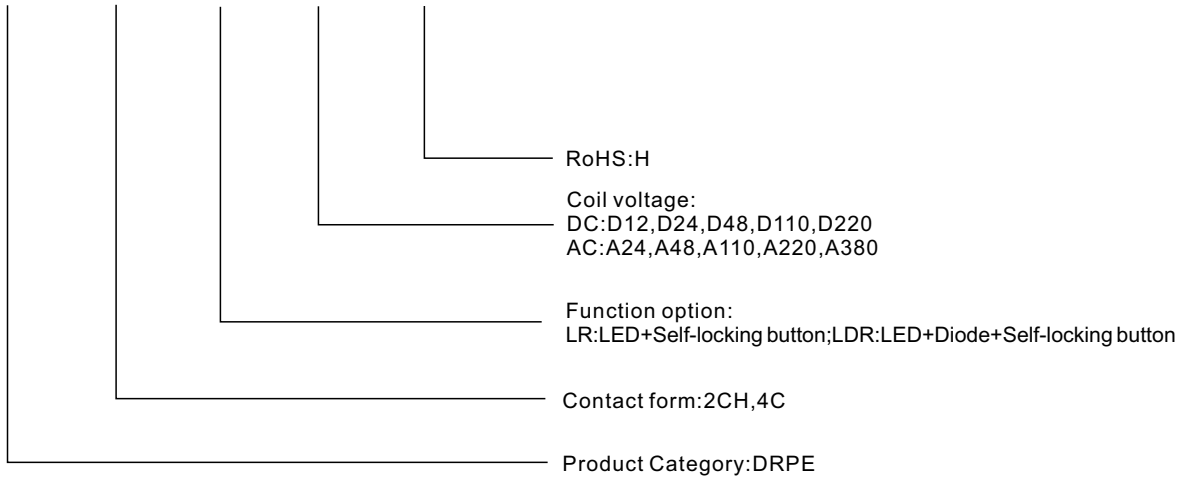


Overall Dimensions

DRPE-2CH/4C

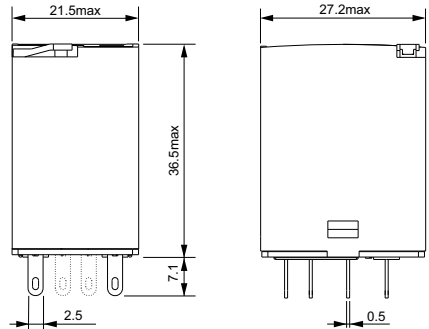


Installation Diagrams, Wiring Diagrams


DRPE-2CH

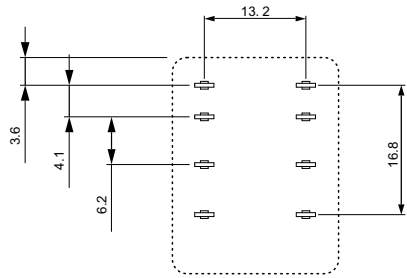


DRPE-4C

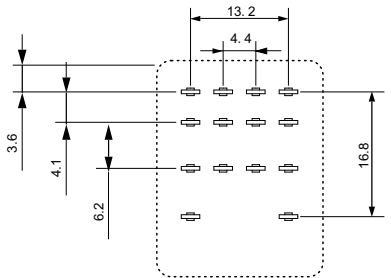


DRPE-2CH-LR




DRPE-2CH-LDR



DRPE-4C-LR



DRPE-4C-LDR





DPYF08A-3

DPYF14A-3

Features

- General socket,08A:10A, 14A:7A.
- Green product RoHS.

DPYF 08A-3-00Z(H)

Product Category:DPYF

Pin Number:08A, 14A

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPYF08A-3	DPYF14A-3
Rated current	10A	7A
Rated voltage	300V	
Coil/Contact dielectric voltage	2000V/S	
Dielectric voltage between contact	2000V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+65°C	
Weight	34g	56g


Supporting relays and accessories

Product type	Relay	Module	Metal clamp spring	Brige
DPYF08A-3	DRPE-2CH	—	Wear	DFJ6-22-13-00Z(H) Color: black
DPYF14A-3	DRPE-4C	—	Wear	DFJ6-29-13-00Z(H) Color: black

Overall Dimensions, Wiring Diagrams

DPYF08A-3

DPYF14A-3

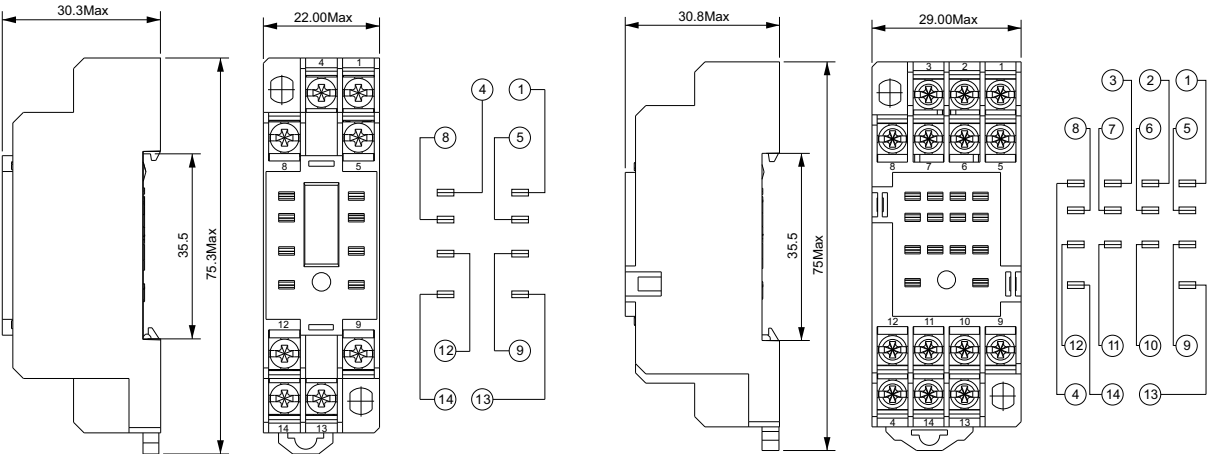

DPYF08A-E3

DPYF14A-E3

Features

- Protective socket,08A:10A, 14A:7A.
- Green product RoHS.

DPYF 08A-E 3-00Z(H)

Product Category:DPYF

Pin Number:08A, 14A

Protect way:E:Protective structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPYF08A-E3	DPYF14A-E3
Rated current	10A	7A
Rated voltage	300V	
Coil/Contact dielectric voltage	2000V/S	
Dielectric voltage between contact	2000V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+65°C	
Weight	34g	56g

Supporting relays and accessories

Product type	Relay	Module	Metal clamp spring	Brige
DPYF08A-E3	DRPE-2CH	—	Wear	DFJ6-22-13-00Z(H) Color: black
DPYF14A-E3	DRPE-4C	—	Wear	DFJ6-29-13-00Z(H) Color: black


Popular Assembled module

24VDC 2×SPDT: DRPES-2CH-LR-D24-07Z(H)
24VDC 4×SPDT: DRPES-4C-LR-D24-07Z(H)
220/230VAC 2×SPDT: DRPES-2CH-LR-A220-07Z(H)
220/230VAC 4×SPDT: DRPES-4C-LR-A220-07Z(H)

Overall Dimensions, Wiring Diagrams

DPYF08A-E3

DPYF14A-E3

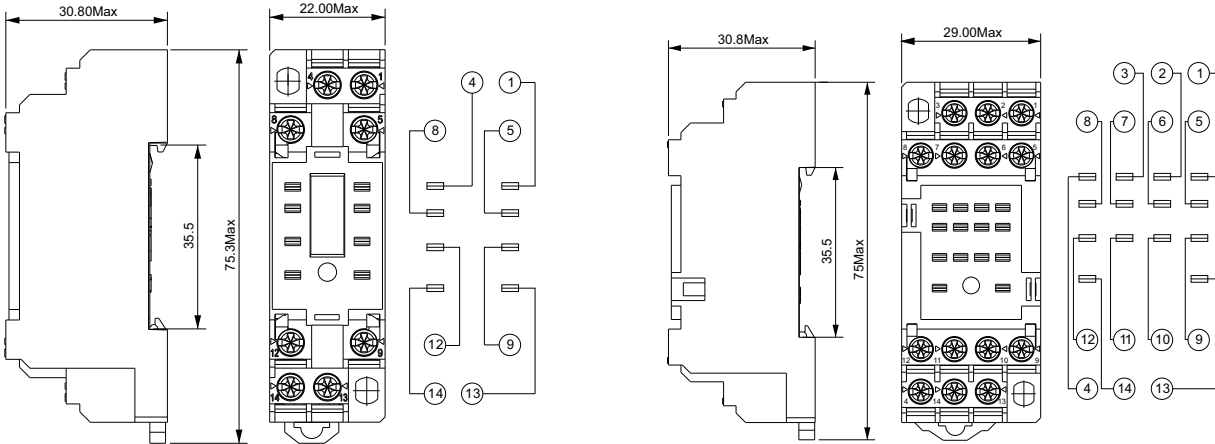



DPKF08A-E3

DPKF14A-E3

Features

- Protective socket,08A:12A, 14A:10A.
- Green product RoHS.

DPKF 08A-E 3-00Z(H)

Product Category:DPKF

Pin Number:08A,14A

Protect way:E:Protective structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPKF08A-E3	DPKF14A-E3
Rated current	12A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	2500V/S	
Dielectric voltage between contact	2500V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+85°C	
Weight	35g	45g


Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Metal clamp spring
DPKF08A-E3	DRPE-2CH	—	—	T-35A
DPKF14A-E3	DRPE-4C	DMD	—	T-35A

Overall Dimensions, Wiring Diagrams

DPKF08A-E3

DPKF14A-E3

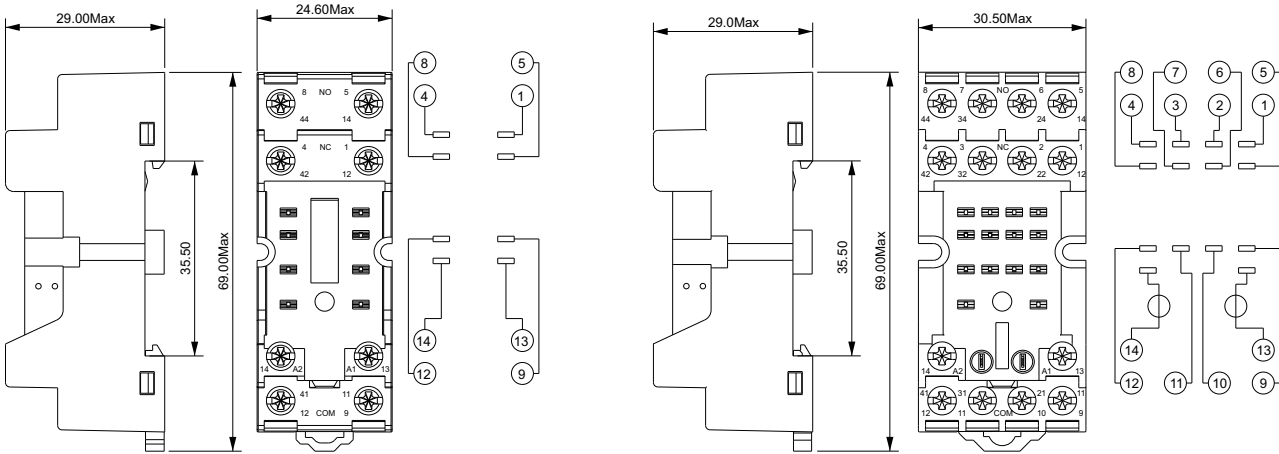

DPKF08A-F3

DPKF14A-F3

Features

- Separable structure socket,08A:12A, 14A:10A .
- Green product RoHS.

DPKF 08A-F 3-00Z(H)

Product Category:DPKF

Pin Number:08A,14A

Protect way:F:Separable structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPKF08A-F3	DPKF14A-F3
Rated current	12A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	4000V/S	
Dielectric voltage between contact	2500V/S	
Screw torque	1.0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+85°C	
Weight	50g	62g


Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Brige
DPKF08A-F3	DRPE-2CH	DMD	Wear	DFB2-27-13-00Z(H) Color: black
DPKF14A-F3	DRPE-4C	DMD	Wear	

Overall Dimensions, Wiring Diagrams

DPKF08A-F3

DPKF14A-F3

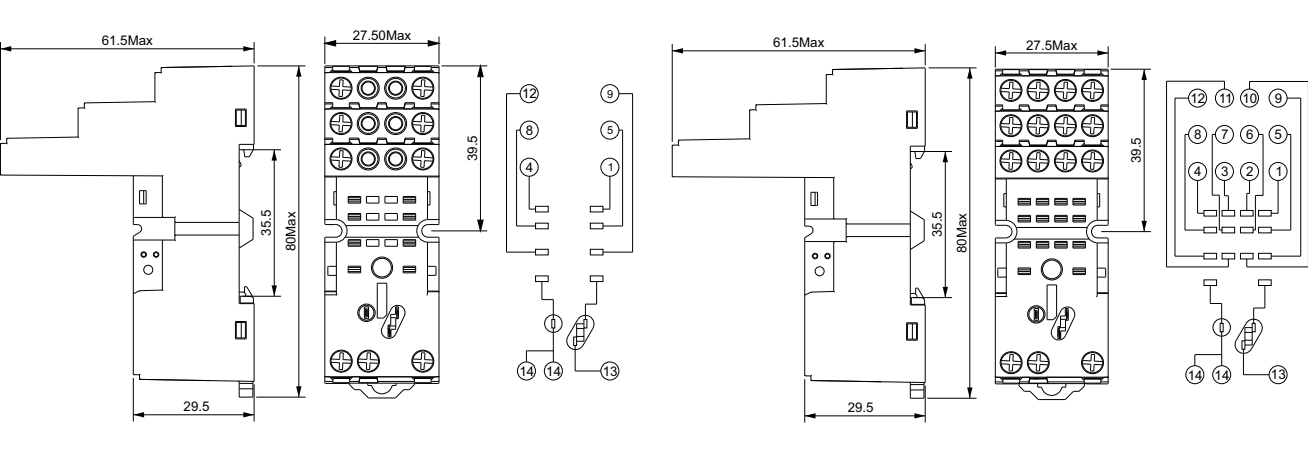



NEW



DPWF08A-F3

DPWF14A-F3

Features

- Separable socket,08A:12A,14A:10A.
- Push-in connection
- Green product RoHS.

DPWF 08A-F 3-00Z(H)

Product Category:DPWF

Pin Number:08A,14A

Protect way:F:Separable structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPWF08A-F3	DPWF14A-F3
Rated current	12A	10A
Rated voltage	300V	
Coil/Contact dielectric voltage	4000V/S	
Dielectric voltage between contact	2500V/S	
External connection wire	22-14AWG/0.25-2.5mm ²	
Ambient temperature	-45~+85°C	
Weight	56.2g	70.5g

Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Brige
DPWF08A-F3	DRPE-2CH	—	Wear	DFB2-27-13-00Z(H) Color: black
DPWF14A-F3	DRPE-4C	—	Wear	—

Popular Assembled module



24VDC 2×SPDT: DRPEP-2CH-LR-D24-07Z(H)
24VDC 4×SPDT: DRPEP-4C-LR-D24-07Z(H)

220/230VAC 2×SPDT: DRPEP-2CH-LR-A220-07Z(H)
220/230VAC 4×SPDT: DRPEP-4C-LR-A220-07Z(H)


Overall Dimensions, Wiring Diagrams

DPWF08A-F3

DPWF14A-F3

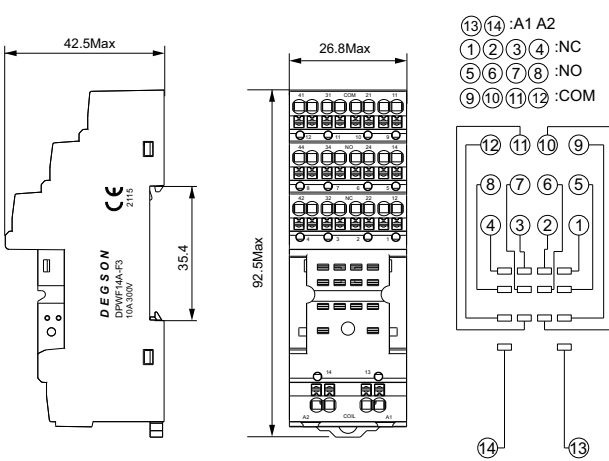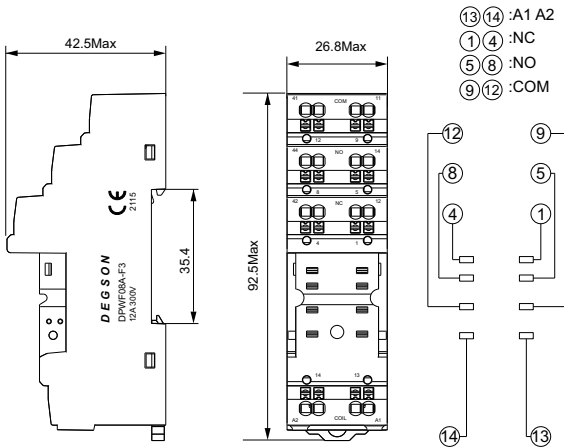

DMD



Features

- Peak voltage inhibit,over voltage protection,voltage indicator.
- Green product RoHS.

DMD-ML 1-24V-00Z(H)

Product Category:DMD,DND

Function option:

L:LED;ML:Varistor+LED

LD:LED+diode;M:Varistor

RC:Resistance capacity;D:diode

Direction of current:Blank:A1-;1:A1+

Voltage:See table corresponding

RoHS:H

Function	L	D	LD	ML	M	RC	L1	D1	LD1	ML1
Wiring diagrams										
Voltage option	6/24V 110/240V	Blank (6-250V)	6/24V 110/240V	24V 120V 240V	24V 120V 240V	6/24V 110/240V	6/24V 110/240V	Blank (6-250V)	6/24V 110/240V	24V 120V 240V

Note: The functional modules have positive and negative poles. Please be careful to distinguish them when using with the socket.

Compatible with following series sockets

DRPB	DRPT	DRPE
DSRC05A-F3	DSRT05A-F3	DPKF08A-E3
DSRC08A-F3	DSRT08A-F3	DPKF14A-E3
DPRC05A-F3	DPRT05A-F3	DPKF08A-F3
DPRC08A-F3	DPRT08A-F3	DPKF14A-F3



DRPL-2C




DRPL-4C

Features

- High power, 10A switching power.
- Multiple sockets optional.
- Various specification, LED is optional.
- Green product RoHS.

DRPL - 4C - L - D24 - 02Z(H)

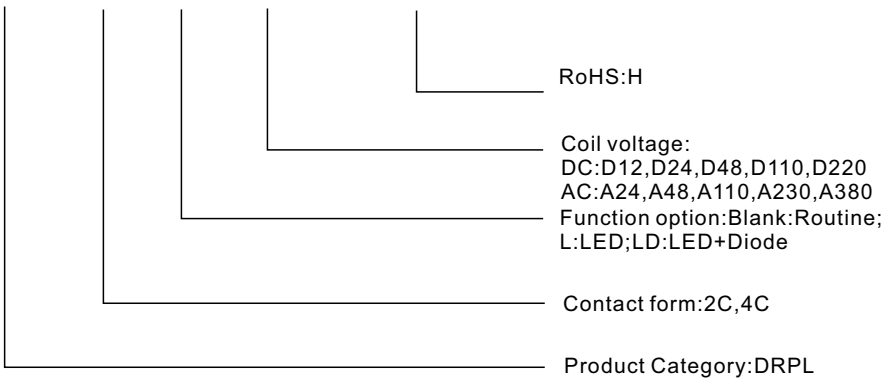

Performance Parameters

Contact parameters

Contact form	2C, 4C
Contact material	AgNi, AgSnO
Resistive load	10A@250VAC/28VDC
Motor load	2C: 1/3HP@240VAC 4C: 1/6HP@240VAC
Switch power	2500VA, 300W
Contact resistance (Initial)	<50mΩ
Electrical life (1s on/1s off)	>1x10 ⁵ (1800 Ops/h)
Mechanical life (300cycles/min)	>1x10 ⁷ (18000 Ops/h)


Coil parameters

Rated voltage (DC)		DC12V	DC24V	DC48V	DC110V	DC220V	
Rated resistance(±10%)	2C	180Ω	640Ω	2600Ω	13000Ω	42000Ω	
	4C	96Ω	360Ω	1540Ω	6800Ω	29000Ω	
Rated voltage (AC)		AC24V	AC48V	AC110V	AC230V	AC380V	
Rated resistance(±10%)	2C	180Ω	640Ω	4430Ω	16500Ω	42000Ω	
	4C	80Ω	320Ω	1680Ω	8000Ω	20000Ω	
Operate voltage	DC:≤75%(Rated voltage);AC:≤80% (Rated voltage)						
Release voltage	DC:≥10%(Rated voltage);AC:≥30% (Rated voltage)						
Max input voltage	110%(Rated voltage)						
Coil power	2C:0.9W/1.2VA ; 4C:1.5W/2.5VA						
Operate time	<20ms						
Release time	<20ms						


Universal parameters

Insulation resistance	500MΩ(500VDC)
Dielectric voltage	
Between contacts	1000VAC/1min
Between contacts (different pole)	2000VAC/1min
Between contacts and coil	2000VAC/1min
Shock withstanding	10G (Half sine wave pulse 11ms)
Vibration withstanding	10-55Hz (Double amplitude 1.0mm)
Ambient temperature	-40...+70°C
Ambient humidity	35%~85%RH
Weight	35g
Matching socket	2C: DPTF08A series ; 4C: DPTF14A series

Overall Dimensions

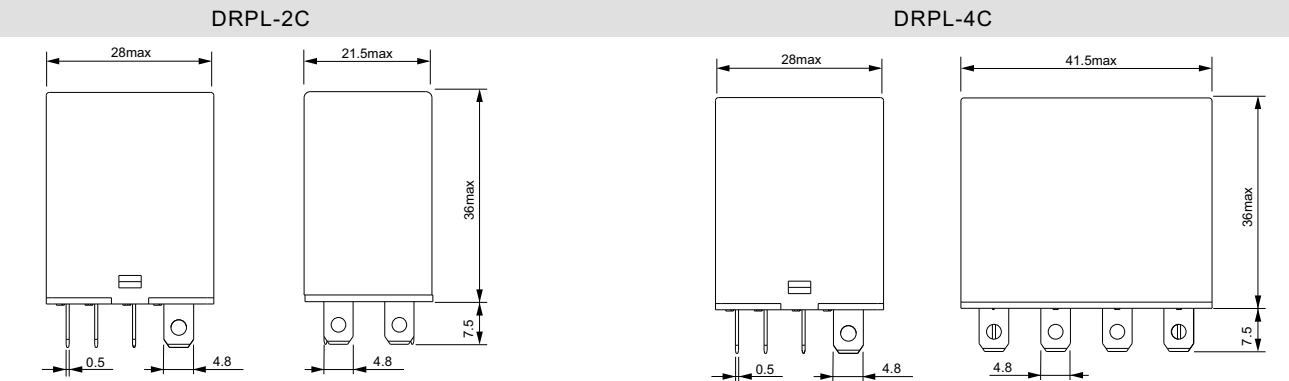

Installation Diagrams, Wiring Diagrams

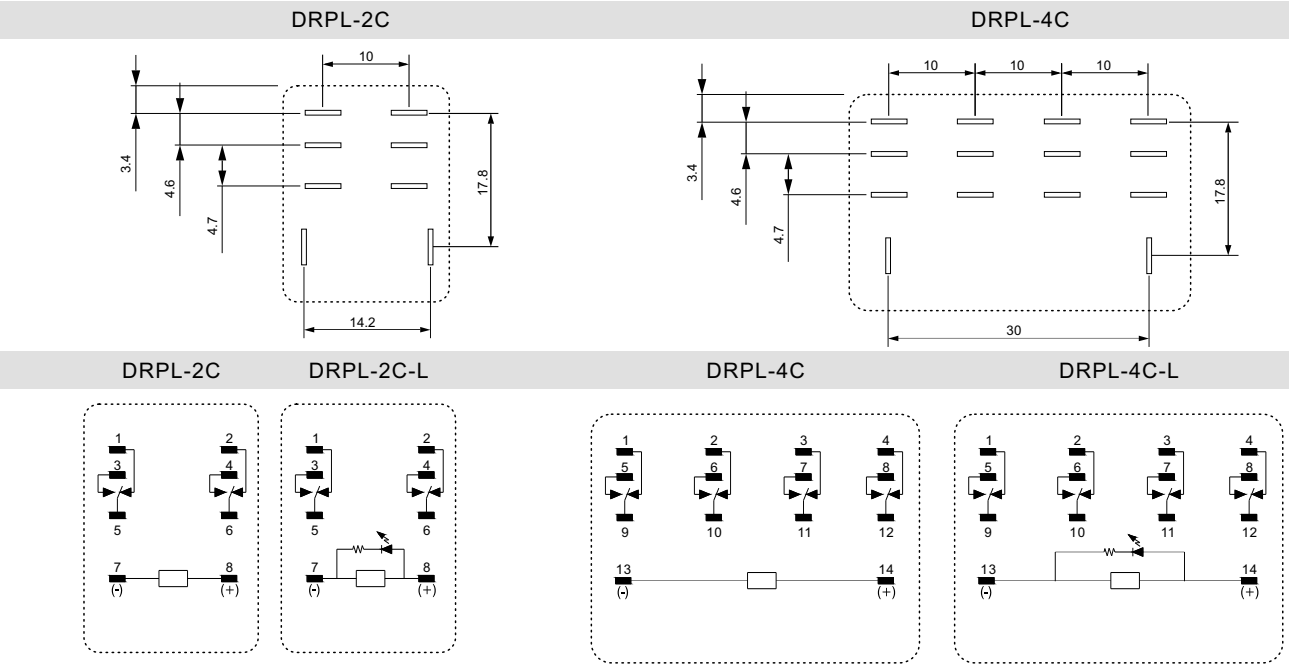



DPTF08A-3

DPTF14A-3

Features

- General socket, 10A.
- Green product RoHS.

DPTF 08A-3-00Z(H)

Product Category:DPTF

Pin Number:08A, 14A

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPTF08A-3	DPTF14A-3
Rated current	10A	
Rated voltage	300V	
Coil/Contact dielectric voltage	2000V/S	
Dielectric voltage between contact	2000V/S	
Screw torque	1.2Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+65°C	
Weight	45g	76g



Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Metal clamp spring
DPTF08A-3	DRPL-2C	—	—	Wear
DPTF14A-3	DRPL-4C	—	—	Wear

Overall Dimensions, Wiring Diagrams

DPTF08A-3

DPTF14A-3

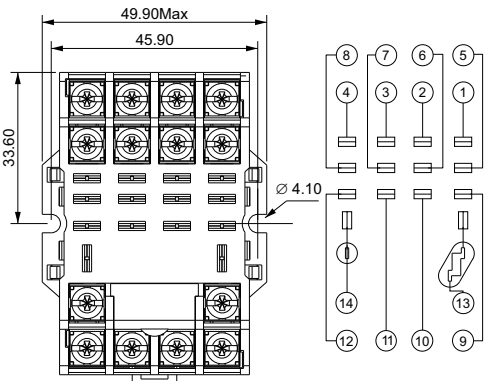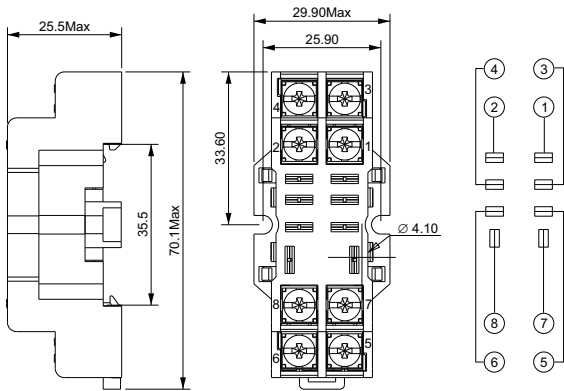

DPTF08A-E3

DPTF14A-E3

Features

- Protective socket, 16A.
- Green product RoHS.

DPTF 08A-E 3-00Z(H)

Product Category:DPTF

Pin Number:08A, 14A

Protect way:E:Protective structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

Product type	DPTF08A-E3	DPTF14A-E3
Rated current	16A	
Rated voltage	300V	
Coil/Contact dielectric voltage	4000V/S	
Dielectric voltage between contact	2500V/S	
Screw torque	1.2Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+85°C	
Weight	46g	78g

Supporting relays and accessories

Product type	Relay	Module	Plastic pull clasp	Metal clamp spring
DPTF08A-E3	DRPL-2C	DMD	—	Wear
DPTF14A-E3	DRPL-4C	DND	—	Wear



Popular Assembled module

24VDC 2×SPDT: DRPLS-2C-L-D24-02Z(H) 220/230VAC 2×SPDT: DRPLS-2C-L-A220-02Z(H)
24VDC 4×SPDT: DRPLS-4C-L-D24-02Z(H) 220/230VAC 4×SPDT: DRPLS-4C-L-A220-02Z(H)

Overall Dimensions, Wiring Diagrams

DPTF08A-E3

DPTF14A-E3

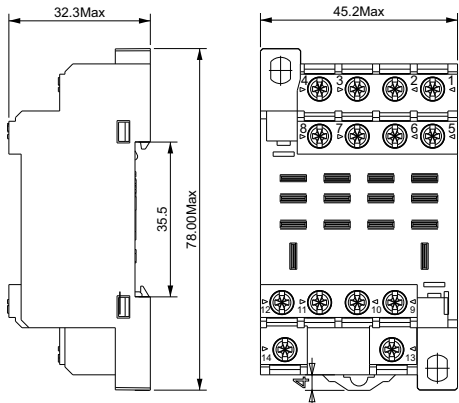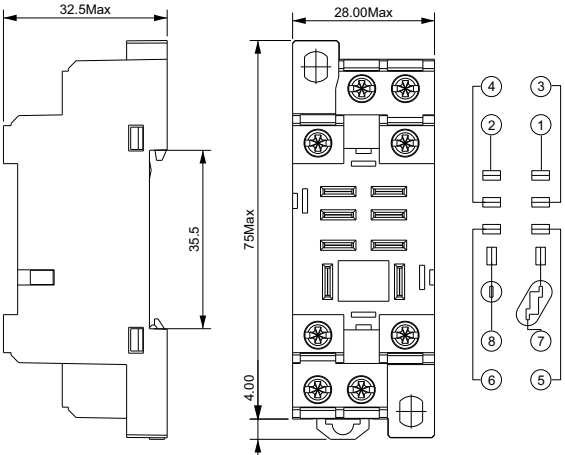

10P IDC Interface Module

CE RoHS




DM72-IDC-10-10-4Y-00Z(H)
DM50-IDC-10-10-4Y-00Z(H)


Features

- This module is 10P IDC connector corresponding to 10P terminal blocks.
- Can be used to connect all with 10P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions




DM72-IDC-10-10-4Y-00Z(H)

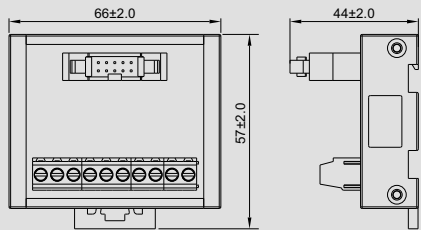


DM50-IDC-10-10-4Y-00Z(H)

Circuit Diagram



DM72-IDC-10-10-4Y-00Z(H)

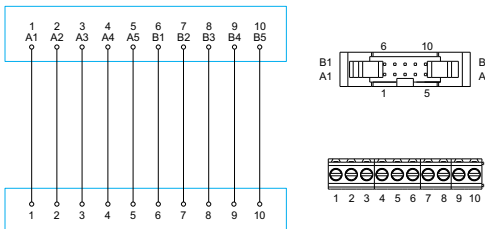

DM50-IDC-10-10-4Y-00Z(H)

Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Suitable PLC


KEYENCE	KV-B16XA/XC KV series of small PLC
Panasonic FP0. FPΣ series	FP0-C16T/C16CT(IN Ministry) FP0-C16P/C16CP(IN Ministry) FP0-C32T/C32CT/T32CT(IN Ministry) FP0-C32P/C32CP/T32CP(IN Ministry) FP0-E16T/P(IN Ministry) FP0-E32T/P(IN Ministry) FP0-E8X FP0-E16X FPΣ-C28(IN Ministry) FPΣ-C32(IN Ministry) FP0-C16T/C16CT(OUT Ministry) FP0-C16P/C16CP(OUT Ministry) FP0-C32T/C32CT/T32CT(OUT Ministry) FP0-C32P/C32CP/T32CP(OUT Ministry) FP0-E16T/P(OUT Ministry) FP0-E32T/P(OUT Ministry) FP0-E8YT FP0-E16YT FPΣ-C28(OUT Ministry) FPΣ-C32(OUT Ministry)

Related Products

DX216-1 DX216-2 DX216-3 DX200-1 DX210-1

20P IDC Interface Module

CE RoHS

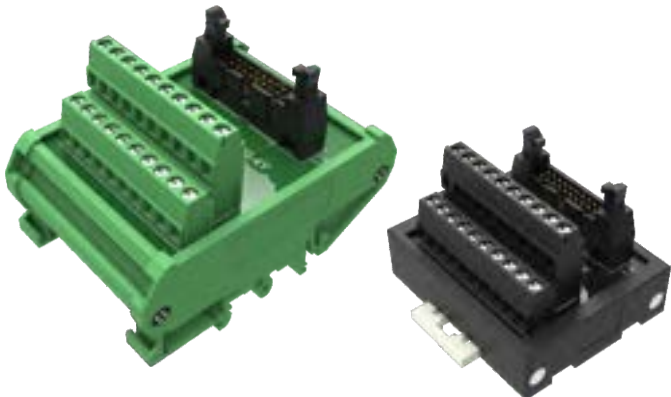


DM72-IDC-20-20-4Y-00Z(H)
DM50-IDC-20-20-4Y-00Z(H)


Features

- This module is 20P IDC connector corresponding to 20P terminal blocks.
- Can be used to connect all with 20P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

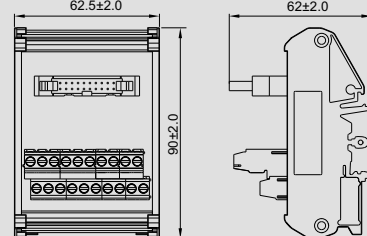


DM72-IDC-20-20-4Y-00Z(H)

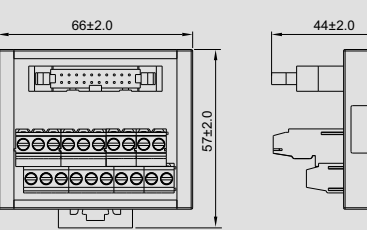

DM50-IDC-20-20-4Y-00Z(H)

Circuit Diagram

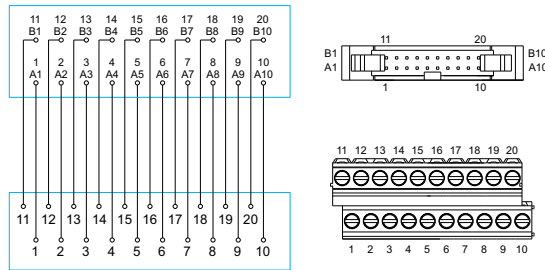

DM72-IDC-20-20-4Y-00Z(H)
DM50-IDC-20-20-4Y-00Z(H)

Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Suitable PLC


OMRON	CJ1W-MD232 CJ1W-MD233
MITSUBISHI Fxseries	FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C FX2NC-16EXL-C FX2NC-16EYT FX2NC-17EYT-C FX2N-10PG FX2N-10GM FX2N-20GM

Related Products

DX200-2 DX210-2 DX218-1 DX220-3 DX218-9

26P IDC Interface Module

CE RoHS

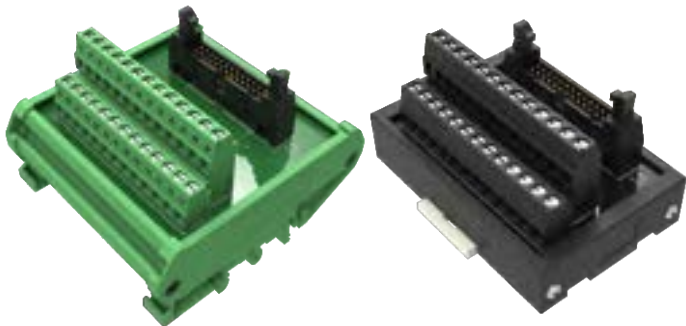

- Features
- This module is 26P IDC connector corresponding to 26P terminal blocks.
 - Can be used to connect all with 26P IDC connector PLC or controller.
 - Save wiring space, time and cost.
 - Convenient for repair and maintenance.

DM72-IDC-26-26-4Y-00Z(H)
DM50-IDC-26-26-4Y-00Z(H)

Dimensions

DM72-IDC-26-26-4Y-00Z(H)

DM50-IDC-26-26-4Y-00Z(H)

Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Suitable PLC


KEYENCE

KL-16CX
KL-16CT
KL-32CX
KL-32CT

Circuit Diagram

34P IDC Interface Module

CE RoHS

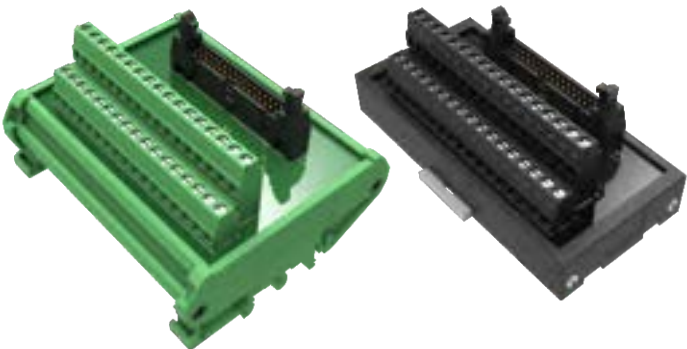

- Features
- This module is 34P IDC connector corresponding to 34P terminal blocks.
 - Can be used to connect all with 34P IDC connector PLC or controller.
 - Save wiring space, time and cost.
 - Convenient for repair and maintenance.

DM72-IDC-34-34-4Y-00Z(H)
DM50-IDC-34-34-4Y-00Z(H)

Dimensions

DM72-IDC-34-34-4Y-00Z(H)

DM50-IDC-34-34-4Y-00Z(H)

Performance Parameters


Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Suitable PLC

KEYENCE


KL- C32XA/C
KL- C64XA/C
KL- C32TA/C
KL- C64TA/C

Circuit Diagram

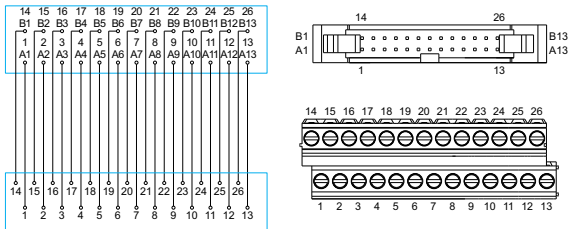

DM72-IDC-26-26-4Y-00Z(H)
DM50-IDC-26-26-4Y-00Z(H)

DX200-26 DX210-6 DX220-2

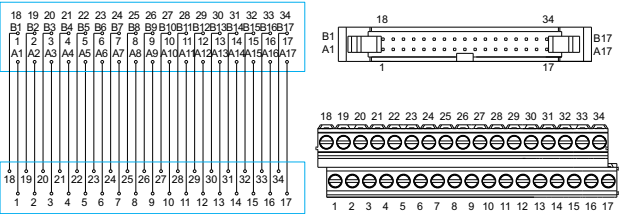

DM72-IDC-34-34-4Y-00Z(H)
DM50-IDC-34-34-4Y-00Z(H)

DX200-3 DX210-3

40P IDC Interface Module

CE RoHS



DM72-IDC-40-40-4Y-00Z(H)
DM50-IDC-40-40-4Y-10Z(H)

Features

- This module is 40P IDC connector corresponding to 40P terminal blocks.
- Can be used to connect all with 40P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

50P IDC Interface Module

CE RoHS




DM72-IDC-50-50-4Y-00Z(H)
DM50-IDC-50-50-4Y-00Z(H)


Features

- This module is 50P IDC connector corresponding to 50P terminal blocks.
- Can be used to connect all with 50P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

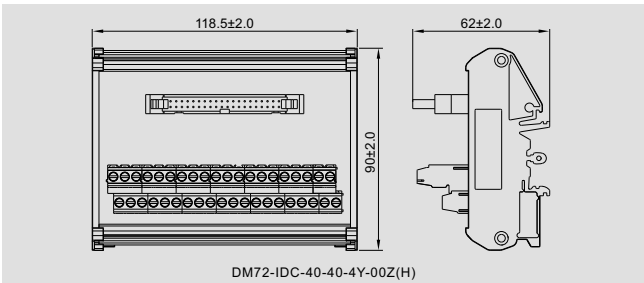

DM72-IDC-40-40-4Y-00Z(H)

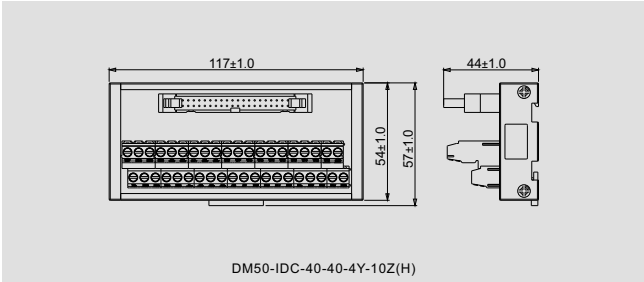

DM50-IDC-40-40-4Y-10Z(H)


Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Suitable PLC

KEYENCE	KV-1000 / KV-3000 / KV-5000 KV-H20S / KV-H40S
OMRON	CJ1W-ID231 / CJ1W-ID261 CJ1W-MD261(IN terminal) CJ1W-ID232 / CJ1W-ID262 CJ1W-MD263(IN terminal) CJ1W-MD563(IN terminal) CJ1W-OD231 / CJ1W-OD261 CJ1W-MD261(OUT terminal) CJ1W-OD232 / CJ1W-OD233 CJ1W-OD262 / CJ1W-OD263 CJ1W-MD263(OUT terminal) CJ1W-MD563(OUT terminal) CJ1M-CPU21 CJ1M-CPU22 CJ1M-CPU23
MITSUBISHI Qseries	Qx41 QX41-S1 Qx42 QX42-S1 Qx71 Qx72 QY41P QY42P Qy71 QH42P QD70P4 QD70P QD70D QD75M
Panasonic FP0, FPΣ, FP2 series	FP2-XT64D2T/P FP2-C1D FP2-X32D2 FP2-X64D2 FP2-32T/P FP2-Y64T/P FP2-XY64D2T/XY64D7T FP2-XY64D2P/XY64D7P FP2-PP21 FP2-PP22 FP2-PP41 FP2-PP42 FP2-HSCT FP2-PXYT
SIEMENS	40P Plug with a full range
Yokogawa PLCFA-M3 series	F3WD64-3N F3WD64-3F F3WD32-3F


Circuit Diagram

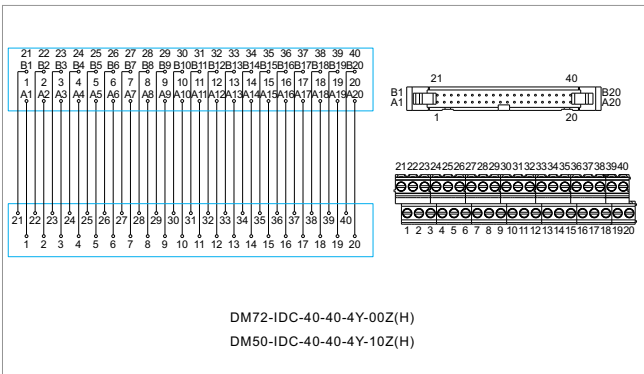


Related Products

DX217-1 DX217-2 DX212-1 DX219-2 DX200-4
DX210-4 DX210-5

Dimensions

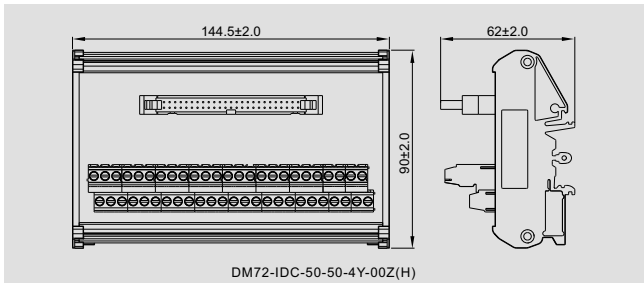

DM72-IDC-50-50-4Y-00Z(H)

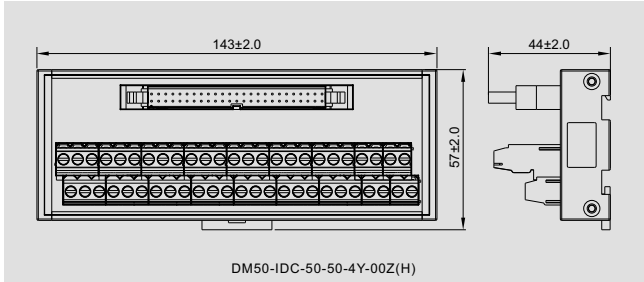

DM50-IDC-50-50-4Y-00Z(H)


Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Suitable PLC

--	--

Circuit Diagram

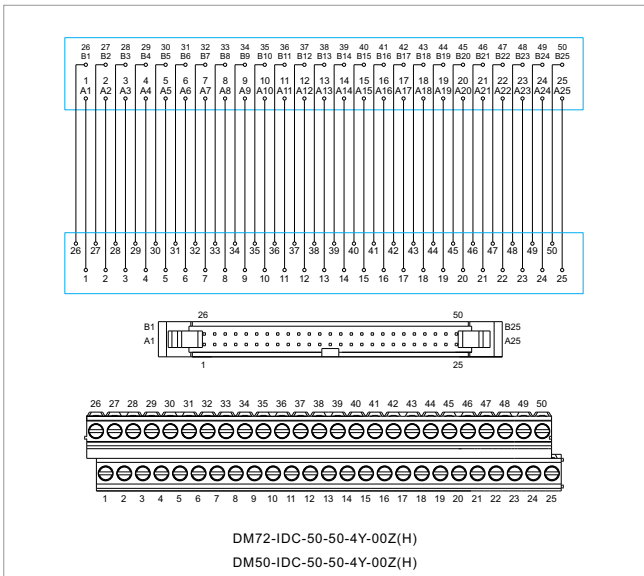

Related Products

20P IDC Interface Module

CE RoHS




DM50-IDC-20-20-4G-00Z(H)

Features


- This module is 20P IDC connector corresponding to 20P barrier terminal blocks.
- Can be used to connect all with 20P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

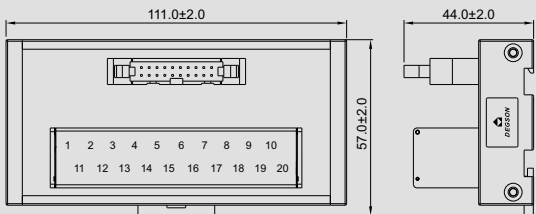

DM50-IDC-20-20-4G-00Z(H)

Circuit Diagram

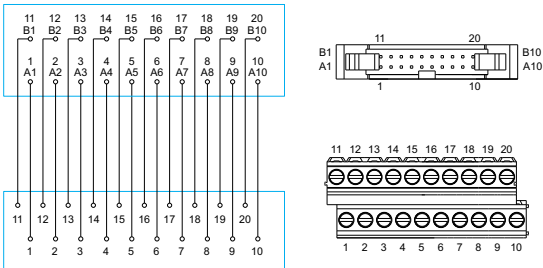

DM50-IDC-20-20-4G-00Z(H)

Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70℃
Maximum Torque	4.43Lb-In
Wire Range	22-14AWG
Mounting	35mm DIN

Suitable PLC

OMRON	CJ1W-MD232 CJ1W-MD233
MITSUBISHI Fxseries	FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C FX2NC-16EXL-C FX2NC-16EYT FX2NC-17EYT-C FX2N-10PG FX2N-10GM FX2N-20GM

Related Products

DX200-2 DX210-2 DX218-1 DX220-3 DX218-9

40P IDC Interface Module

CE RoHS




DM50-IDC-40-40-4G-00Z(H)

Features


- This module is 40P IDC connector corresponding to 40P barrier terminal blocks.
- Can be used to connect all with 40P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

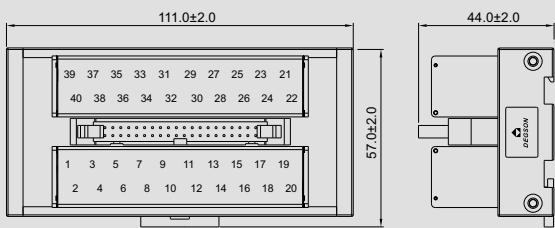

DM50-IDC-40-40-4G-00Z(H)

Circuit Diagram

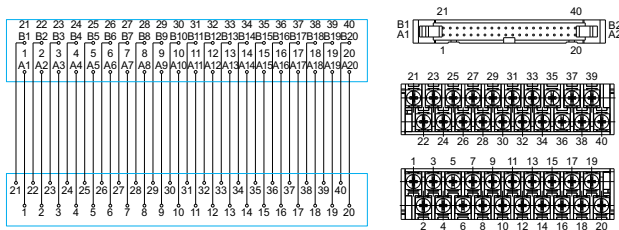

DM50-IDC-40-40-4G-00Z(H)

Related Products

DX217-1 DX217-2 DX212-1 DX219-2 DX200-4
DX210-4 DX210-5

Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70℃
Maximum Torque	4.43Lb-In
Wire Range	22-14AWG
Mounting	35mm DIN

Suitable PLC

KEYENCE	KV-1000 / KV-3000 / KV-5000 KV-H20S / KV-H40S
OMRON	CJ1W-ID231 / CJ1W-ID261 CJ1W-MD261(IN terminal) CJ1W-ID232 / CJ1W-ID262 CJ1W-MD263(IN terminal) CJ1W-MD563(IN terminal) CJ1W-OD231 / CJ1W-OD261 CJ1W-MD261(OUT terminal) CJ1W-OD232 / CJ1W-OD233 CJ1W-OD262 / CJ1W-OD263 CJ1W-MD263(OUT terminal) CJ1W-MD563(OUT terminal) CJ1M-CPU21 CJ1M-CPU22 CJ1M-CPU23
MITSUBISHI Qseries	Qx41 QX41-S1 Qx42 QX42-S1 Qx71 Qx72 QY41P QY42P Qy71 QH42P QD70P4 QD70P QD70D QD75M
Panasonic FP0. FPΣ FP2 series	FP2-XT64D2T/P FP2-C1D FP2-X32D2 FP2-X64D2 FP2-32T/P FP2-Y64T/P FP2-XY64D2T/XY64D7T FP2-XY64D2P/XY64D7P FP2-PP21 FP2-PP22 FP2-PP41 FP2-PP42 FP2-HSCT FP2-PXYT
SIEMENS	40P Plug with a full range
Yokogawa PLCFA-M3 series	F3WD64-3N F3WD64-3F F3WD32-3F

20、26、36、50P MDR Interface Module

CE RoHS




Features


- Including 20P, 26P, 36P, 50P MDR Interface module.
- Can be directly used in Mitsubishi, Yaskawa, Panasonic, Delta, Sanyo, AB servo driver signal interface.
- No need for welding wire, just one to one pin wiring.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

DM50-MDR-20-20-4Y-00Z(H) DM50-MDR-26-26-4Y-00Z(H)
DM50-MDR-36-36-4Y-00Z(H) DM50-MDR-50-50-4Y-00Z(H)


Dimensions

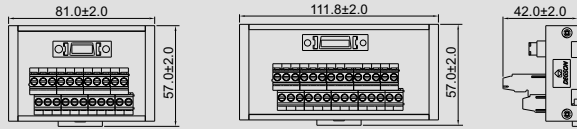

DM50-MDR-20-20-4Y-00Z(H) DM50-MDR-26-26-4Y-00Z(H)

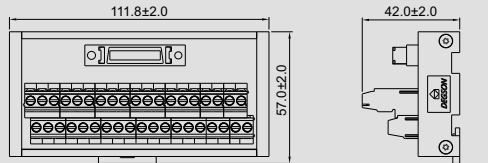


DM50-MDR-36-36-4Y-00Z(H)

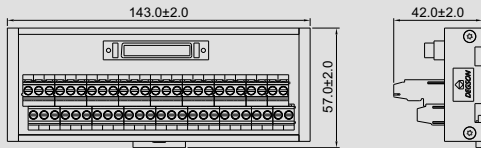

DM50-MDR-50-50-4Y-00Z(H)

Circuit Diagram

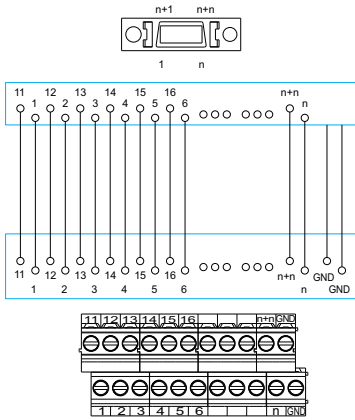

DM50-MDR-20-20-4Y-00Z(H)
DM50-MDR-26-26-4Y-00Z(H)
DM50-MDR-36-36-4Y-00Z(H)

Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70℃
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN


Suitable

PANASONIC DELTA KEYENCE SANYO YASKWA AB FUJI MITSUBISHI

Related Products

DX220-1 DX220-2 DX220-3

Circuit Diagram

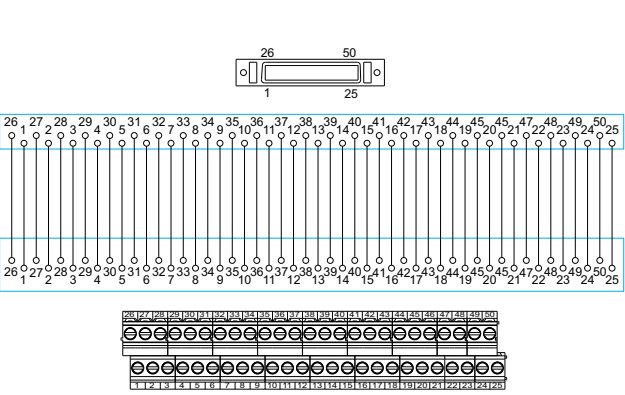

DM50-MDR-50-50-4Y-00Z(H)

40P FCN Interface Module

CE RoHS




DM50-FCN-40-40-4Y-00Z(H)

Features

- This module is 40P FCN Interface module.
- Can be used to connect various brands of servo or PLC controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

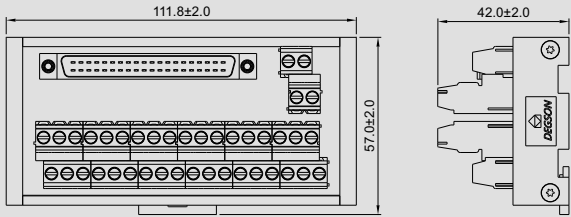


DM50-FCN-40-40-4Y-00Z(H)


Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70℃
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Suitable PLC

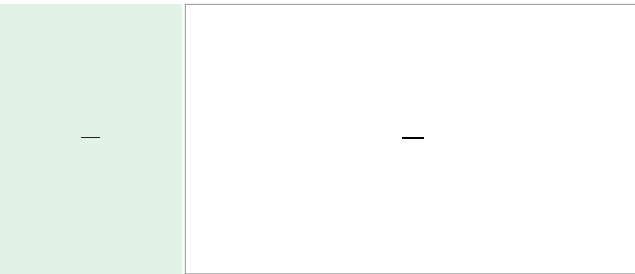

Circuit Diagram

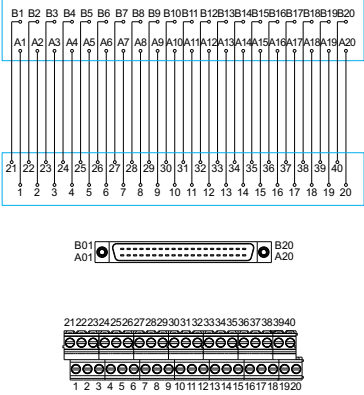


DM50-FCN-40-40-4Y-00Z(H)

Related Products

Small D-SUB Female Interface Module

RoHS

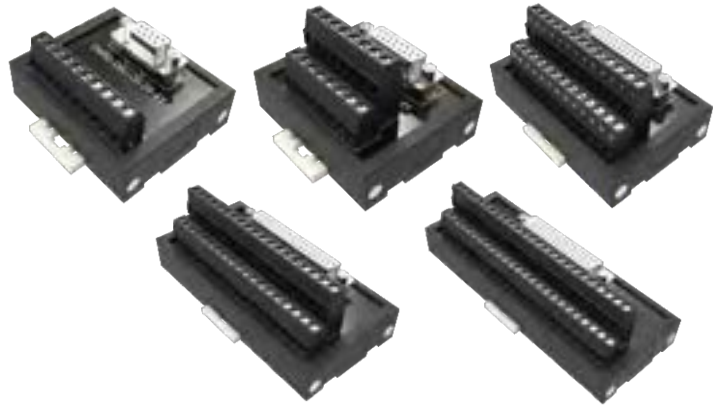


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB female splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

DM50-DBJ-09-09-4Y-00Z(H) DM50-DBJ-15-15-4Y-00Z(H)
DM50-DBJ-25-25-4Y-00Z(H) DM50-DBJ-37-37-4Y-00Z(H)
DM50-DBJ-50-50-4Y-00Z(H)


Dimensions

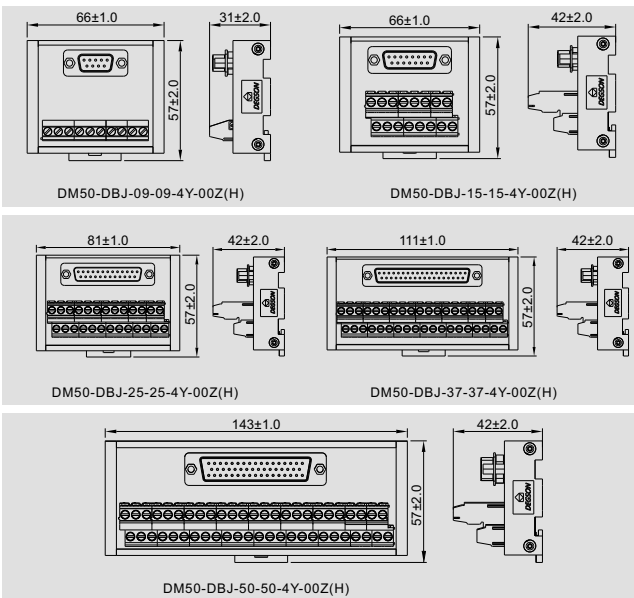


Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Circuit Diagram

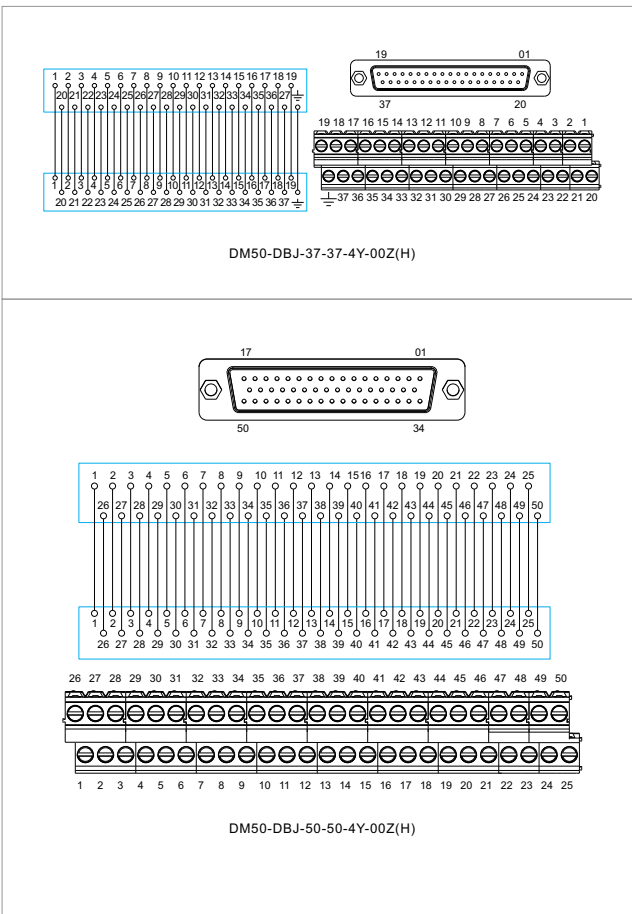


Circuit Diagram

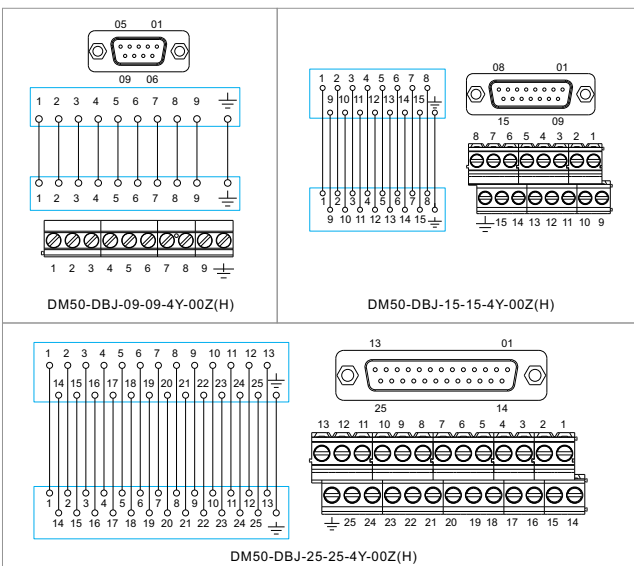

Small D-SUB Male Interface Module

RoHS

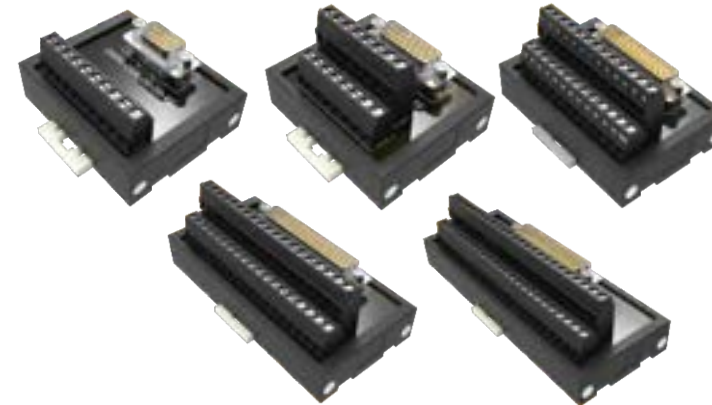


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB male splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

DM50-DBK-09-09-4Y-00Z(H) DM50-DBK-15-15-4Y-00Z(H)
DM50-DBK-25-25-4Y-00Z(H) DM50-DBK-37-37-4Y-00Z(H)
DM50-DBK-50-50-4Y-00Z(H)


Dimensions

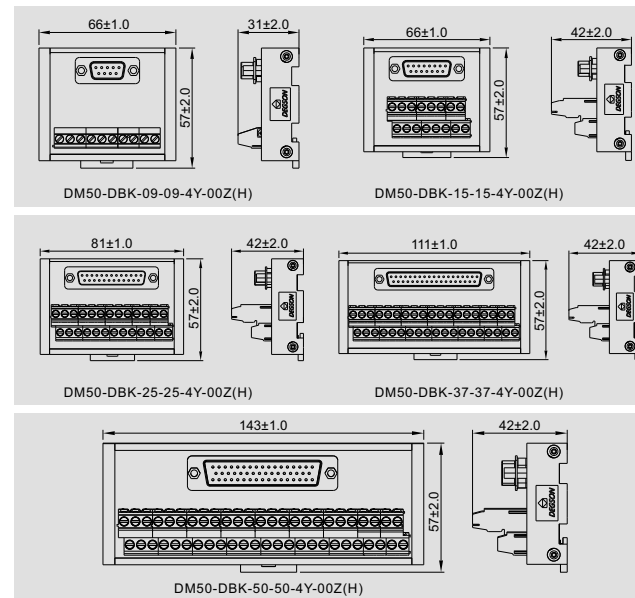


Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Circuit Diagram

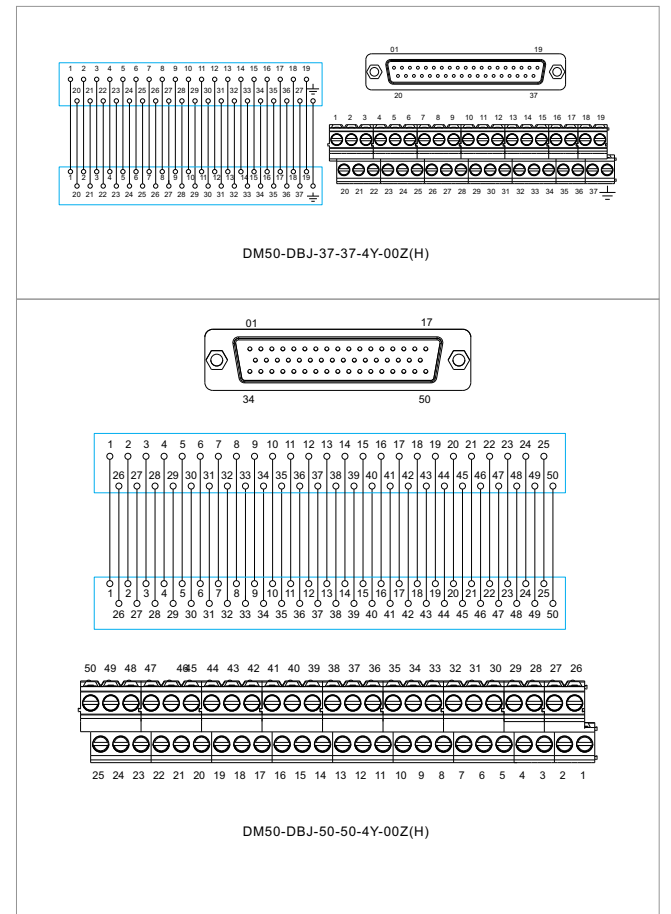


Circuit Diagram

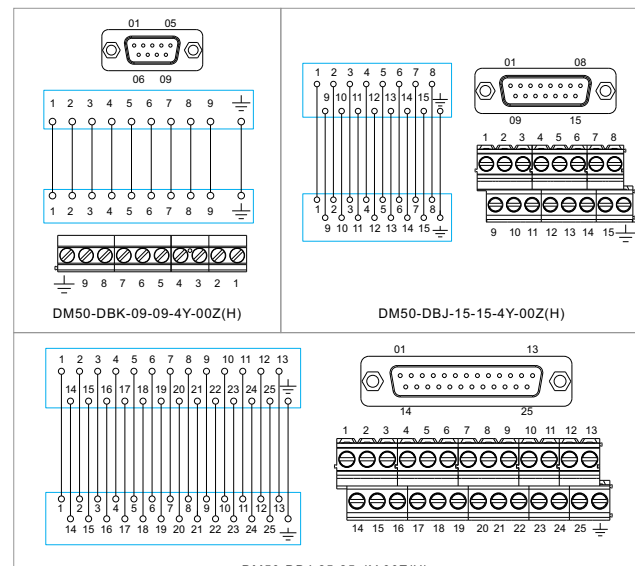

D-SUB Female Interface Module

CE RoHS

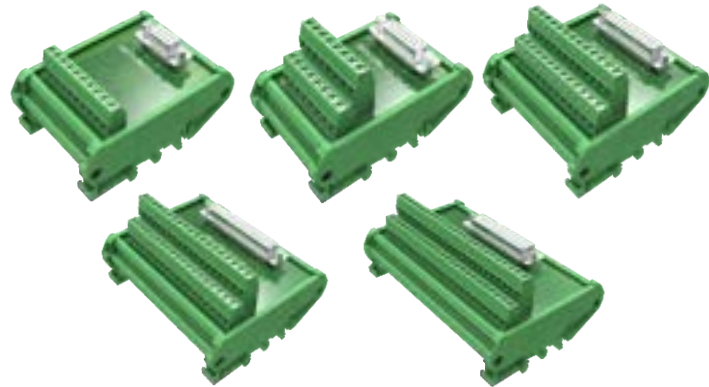


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB female splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

DM72-DBJ-09-09-4Y-00Z(H) DM72-DBJ-15-15-4Y-00Z(H)
DM72-DBJ-25-25-4Y-00Z(H) DM72-DBJ-37-37-4Y-00Z(H)
DM72-DBJ-50-50-4Y-00Z(H)


Dimensions

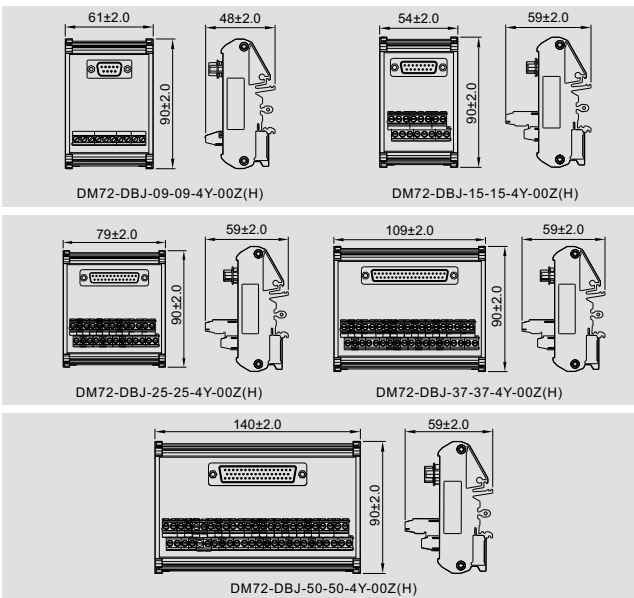


Performance Parameters

Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Circuit Diagram

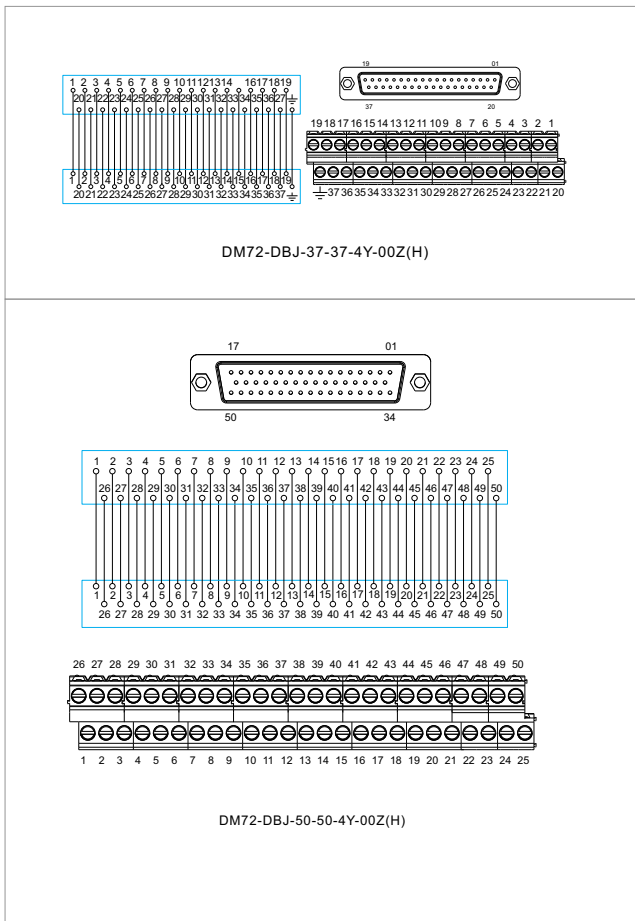


Circuit Diagram

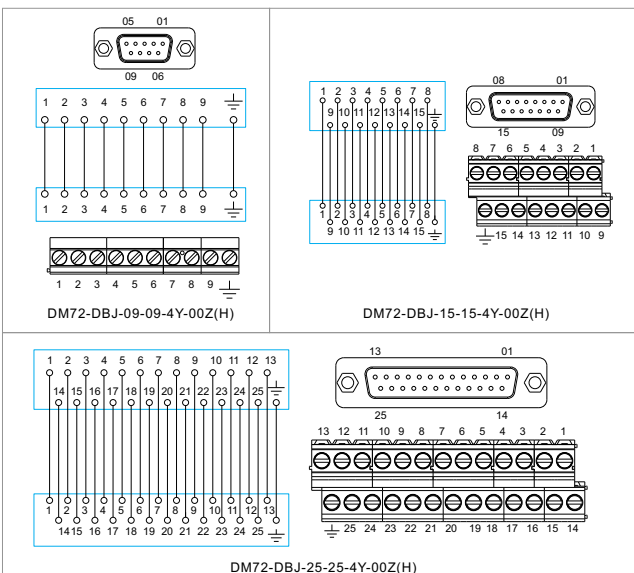

D-SUB Male Interface Module

CE RoHS

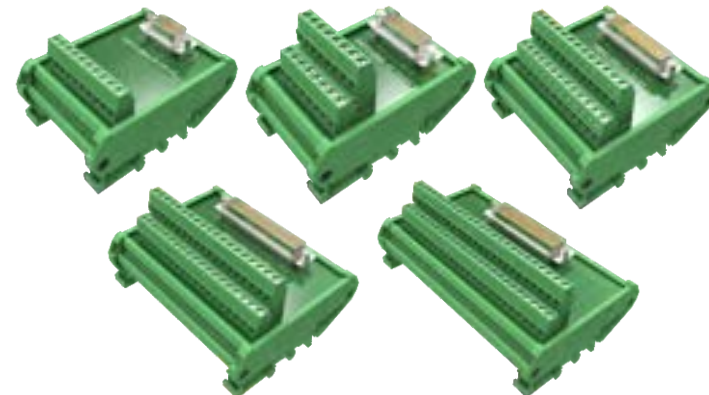


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB male splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

DM72-DBK-09-09-4Y-00Z(H) DM72-DBK-15-15-4Y-00Z(H)
DM72-DBK-25-25-4Y-00Z(H) DM72-DBK-37-37-4Y-00Z(H)
DM72-DBK-50-50-4Y-00Z(H)


Dimensions

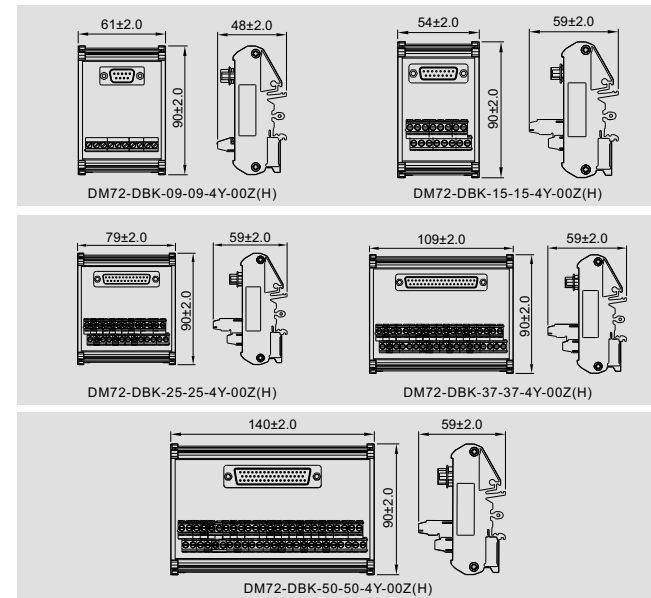


Performance Parameters


Rated Current/Voltage	1A/125VAC
Withstand Voltage	500VAC 1min
Insulation Resistance	500MΩ/ 500VDC
Stripping Length	7mm
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	35mm DIN

Circuit Diagram

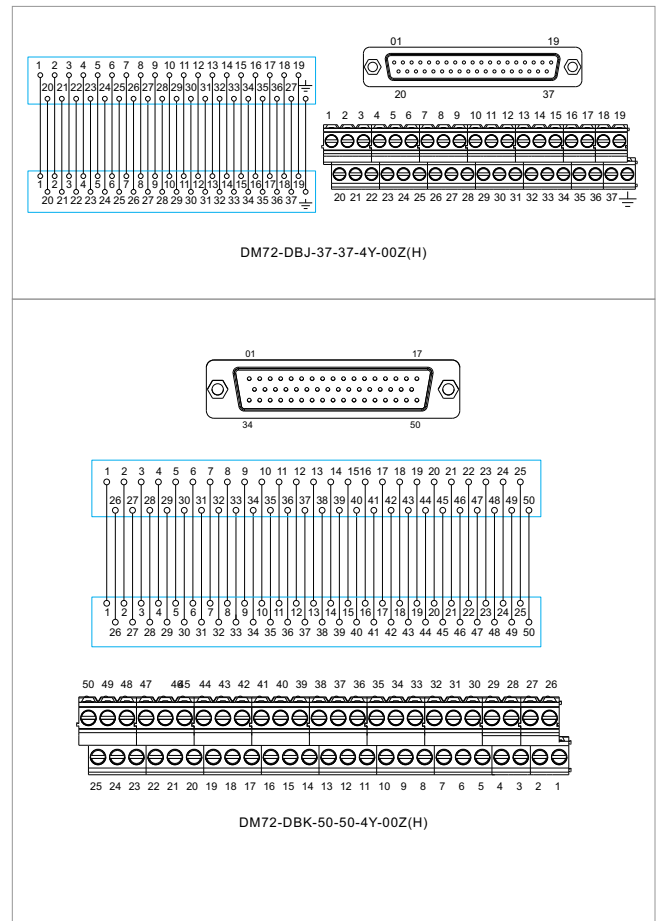

Circuit Diagram

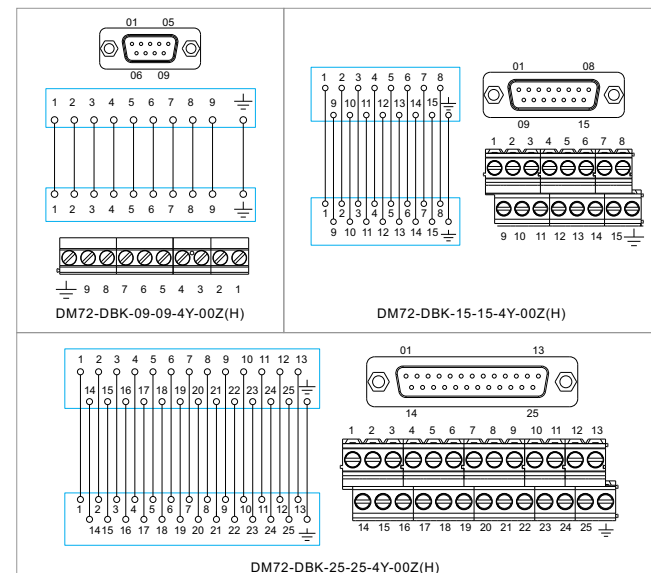

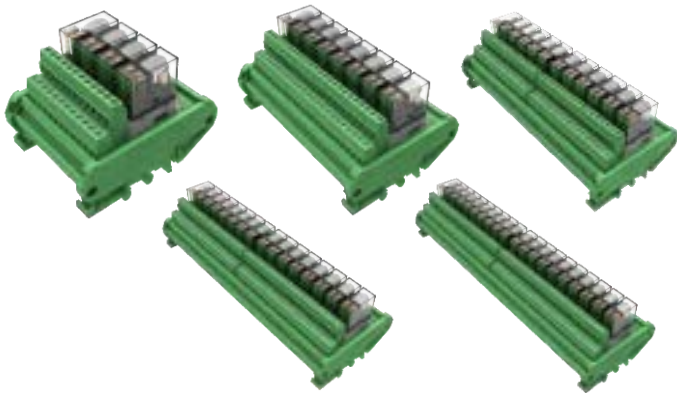


Features

- Including 4, 8, 12, 16, 20 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 2C/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.


DM72-RM-04-PN-4-44-10Z(H) DM72-RM-08-PN-4-44-10Z(H)
DM72-RM-12-PN-4-44-10Z(H) DM72-RM-16-PN-4-44-10Z(H)
DM72-RM-20-PN-4-44-10Z(H)

Dimensions

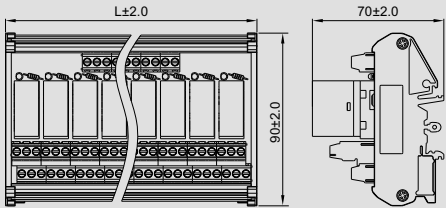

P/N	L * W * H mm
DM72-RM-04-PN-4-44-10Z(H)	72 * 90 * 70
DM72-RM-08-PN-4-44-10Z(H)	133 * 90 * 70
DM72-RM-12-PN-4-44-10Z(H)	198 * 90 * 70
DM72-RM-16-PN-4-44-10Z(H)	258 * 90 * 70
DM72-RM-20-PN-4-44-10Z(H)	319 * 90 * 70

Circuit Diagram

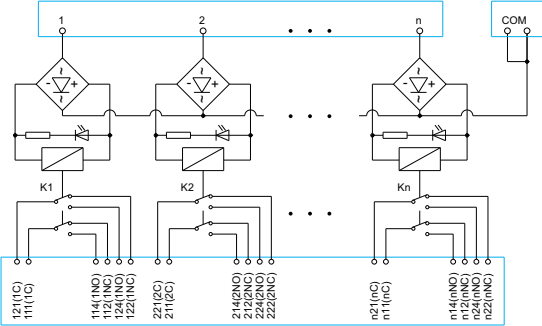

DM72-RM-04-PN-4-44-10Z(H) DM72-RM-08-PN-4-44-10Z(H)
DM72-RM-12-PN-4-44-10Z(H) DM72-RM-16-PN-4-44-10Z(H)
DM72-RM-20-PN-4-44-10Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	5A
Load Type	2NO + 2NC
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35


Relay P/N

Commonly used relays recommended:
10: Degson DRPB-2C-D24, 11: Omron G2R-2-DC24V, 03: Hongfa HF115F/024-2ZS4-24VDC
The relay is consumable, if the service life of the same specification relay replacement.

© Please confirm the output contact capacity before use, do not exceed its scope.

Wiring Method

- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

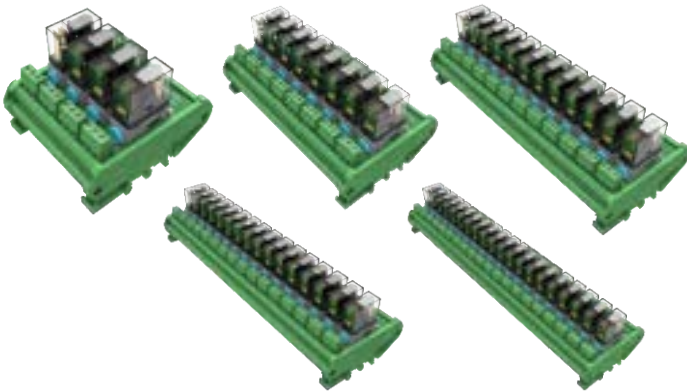


Features

- Including 4, 8, 12, 16, 20 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1C/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.


DM72-RM-04-PN-2-44-100Z(H) DM72-RM-08-PN-2-44-100Z(H)
DM72-RM-12-PN-2-44-100Z(H) DM72-RM-16-PN-2-44-100Z(H)
DM72-RM-20-PN-2-44-100Z(H)

Dimensions

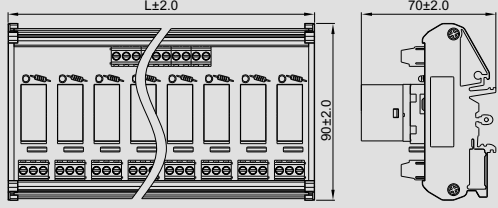

P/N	L * W * H mm
DM72-RM-04-PN-2-44-100Z(H)	81.5 * 90 * 70
DM72-RM-08-PN-2-44-100Z(H)	156 * 90 * 70
DM72-RM-12-PN-2-44-100Z(H)	230 * 90 * 70
DM72-RM-16-PN-2-44-100Z(H)	305 * 90 * 70
DM72-RM-20-PN-2-44-100Z(H)	380 * 90 * 70

Circuit Diagram

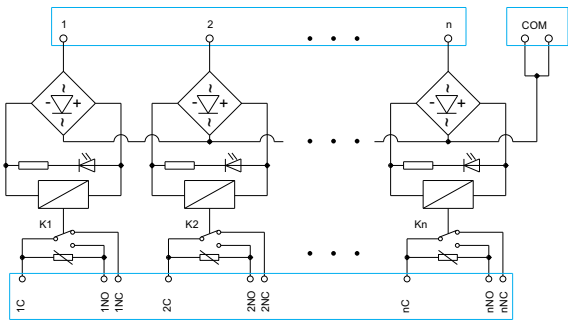

DM72-RM-04-PN-2-44-100Z(H) DM72-RM-08-PN-2-44-100Z(H)
DM72-RM-12-PN-2-44-100Z(H) DM72-RM-16-PN-2-44-100Z(H)
DM72-RM-20-PN-2-44-100Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	16A
Load Type	1NO + 1NC
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35

Relay P/N


Commonly used relays recommended:
100: Degson DRPB-1CH-D24, 101: Omron G2R-1-E-DC24V
The relay is consumable, if the service life of the same specification relay replacement.

© Please confirm the output contact capacity before use, do not exceed its scope.

Wiring Method

- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

Relay Module

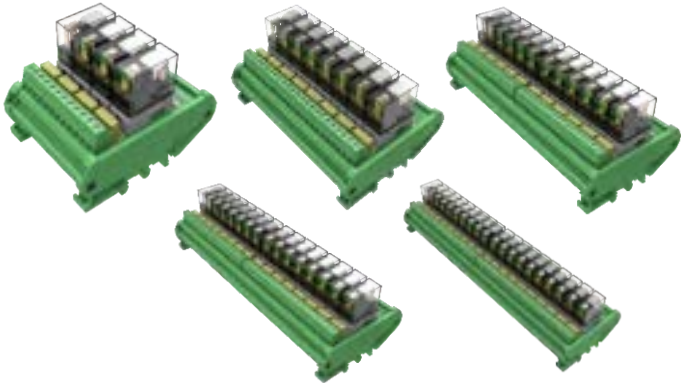


Features

- Including 4, 8, 12, 16, 20 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1C/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.


DM72-RM-04-PN-2-44-10Z(H) DM72-RM-08-PN-2-44-10Z(H)
DM72-RM-12-PN-2-44-10Z(H) DM72-RM-16-PN-2-44-10Z(H)
DM72-RM-20-PN-2-44-10Z(H)

Dimensions

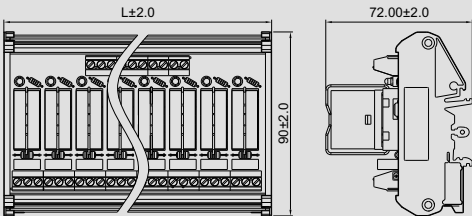

P/N	L * W * H mm
DM72-RM-04-PN-2-44-10Z(H)	70 * 90 * 70
DM72-RM-08-PN-2-44-10Z(H)	131 * 90 * 70
DM72-RM-12-PN-2-44-10Z(H)	194 * 90 * 70
DM72-RM-16-PN-2-44-10Z(H)	255 * 90 * 70
DM72-RM-20-PN-2-44-10Z(H)	316 * 90 * 70

Circuit Diagram

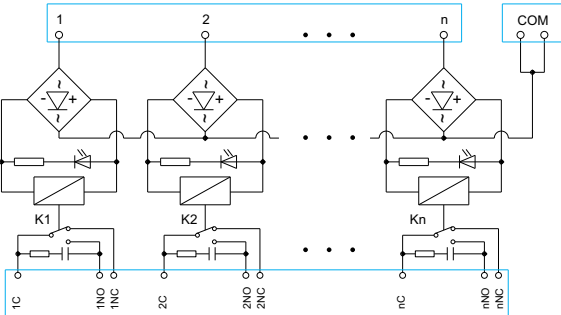

DM72-RM-04-PN-2-44-10Z(H) DM72-RM-08-PN-2-44-10Z(H)
DM72-RM-12-PN-2-44-10Z(H) DM72-RM-16-PN-2-44-10Z(H)
DM72-RM-20-PN-2-44-10Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	10A
Load Type	1NO + 1NC
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35

Relay P/N


Commonly used relays recommended:
10: Degson DRPB-1C-D24, 11: Omron G2R-1-DC24V
The relay is consumable, if the service life of the same specification relay replacement.

© Please confirm the output contact capacity before use, do not exceed its scope.

Wiring Method

- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

Subminiature Relay Module

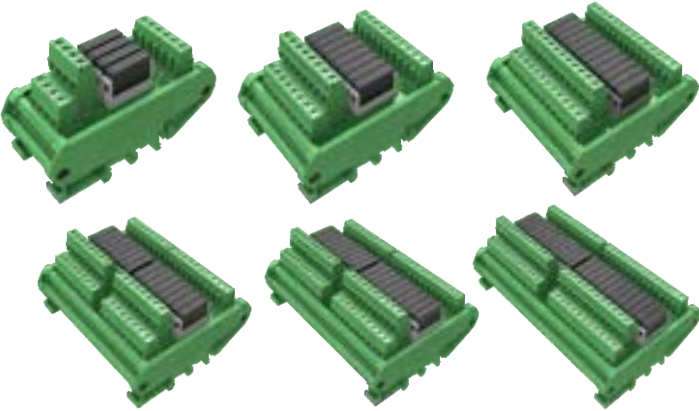


Features

- Including 4, 8, 12, 16, 20, 24 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1N/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.


DM72-RMUS-04-PN-1-44-00Z(H) DM72-RMUS-08-PN-1-44-00Z(H)
DM72-RMUS-12-PN-1-44-00Z(H) DM72-RMUS-16-PN-1-44-00Z(H)
DM72-RMUS-20-PN-1-44-00Z(H) DM72-RMUS-24-PN-1-44-00Z(H)

Dimensions



P/N	L * W * H mm
DM72-RMUS-04-PN-1-44-00Z(H)	40 * 90 * 60
DM72-RMUS-08-PN-1-44-00Z(H)	60 * 90 * 60
DM72-RMUS-12-PN-1-44-00Z(H)	80 * 90 * 60
DM72-RMUS-16-PN-1-44-00Z(H)	103 * 90 * 60
DM72-RMUS-20-PN-1-44-00Z(H)	123 * 90 * 60
DM72-RMUS-24-PN-1-44-00Z(H)	145 * 90 * 60

Circuit Diagram

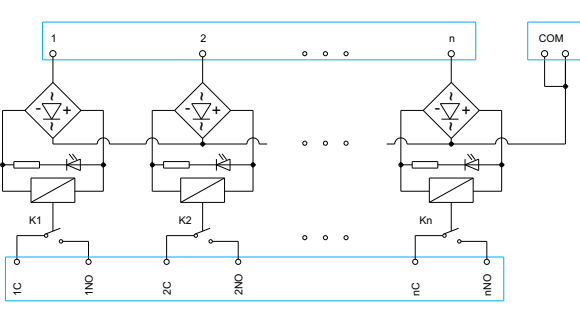

DM72-RMUS-04-PN-1-44-00Z(H) DM72-RMUS-08-PN-1-44-00Z(H)
DM72-RMUS-12-PN-1-44-00Z(H) DM72-RMUS-16-PN-1-44-00Z(H)
DM72-RMUS-20-PN-1-44-00Z(H) DM72-RMUS-24-PN-1-44-00Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	5A
Load Type	1NO
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35


Relay P/N

Panasonic relay P/N: APAN3124, the relay is consumable, if the service life of the same specification relay replacement.

© Please confirm the output contact capacity before use, do not exceed its scope.

Wiring Method

- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

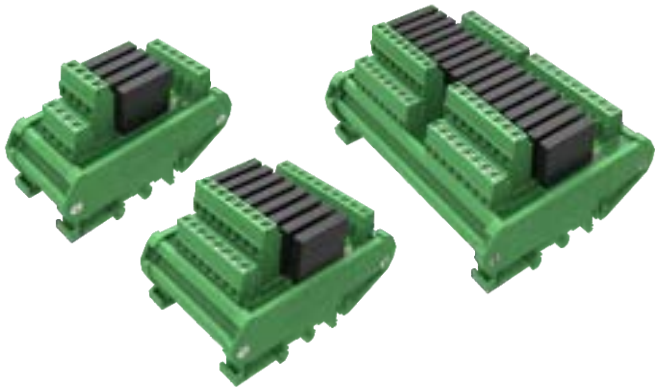


DM72-RME-04-PN-1-4A-00Z(H)
DM72-RME-08-PN-1-4A-00Z(H)
DM72-RME-16-PN-1-4A-00Z(H)

Features

- Including 4, 8, 16 bit independent Solid State relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1N/O node and 1 to 1 output of the output end.
- MOS tube output, no mechanical contact.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions




P/N	L * W * H mm
DM72-RME-04-PN-1-4A-00Z(H)	40 * 90 * 60
DM72-RME-08-PN-1-4A-00Z(H)	62 * 90 * 60
DM72-RME-16-PN-1-4A-00Z(H)	117 * 90 * 60

Performance Parameters

Input Voltage	20VDC~28VDC
Maximum Load Current	2A
Surge Conducts Current	30A(60Hz 1 cycle)
Open state leakage current	1.5mA or less
Load voltage (peak AC)	75~264VAC
Actuation Time	1ms or less
Reset Time	1/2 cycle + 1ms or less
Insulation Resistance	1000MQ/500VDC
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35

Circuit Diagram

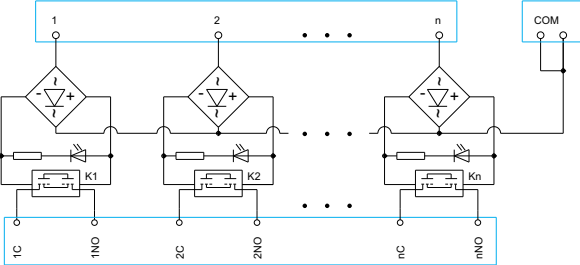

DM72-RME-04-PN-1-4A-00Z(H) DM72-RME-08-PN-1-4A-00Z(H)
DM72-RME-16-PN-1-4A-00Z(H)


Relay P/N

Panasonic relay P/N: AQG22224

© Please confirm the output contact capacity before use, do not exceed its scope.

Wiring Method

- Input control signal through 1~n.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

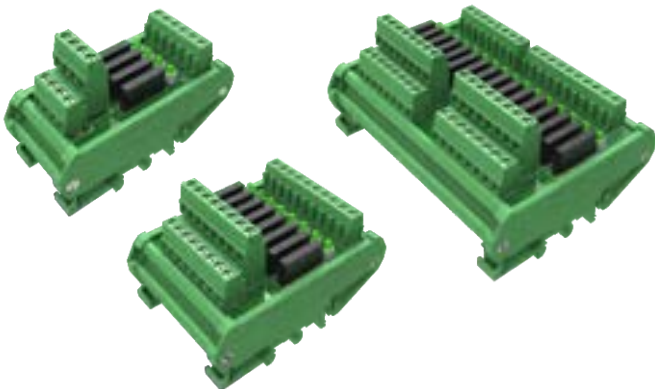


DM72-RME-04-PN-1-4D-00Z(H)
DM72-RME-08-PN-1-4D-00Z(H)
DM72-RME-16-PN-1-4D-00Z(H)

Features

- Including 4, 8, 16 bit independent Solid State relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1N/O node and 1 to 1 output of the output end.
- MOS tube output, no mechanical contact, AC/DC Universal Output.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions




P/N	L * W * H mm
DM72-RME-04-PN-1-4D-00Z(H)	40 * 90 * 60
DM72-RME-08-PN-1-4D-00Z(H)	62 * 90 * 60
DM72-RME-16-PN-1-4D-00Z(H)	117 * 90 * 60

Performance Parameters

Input Voltage	20VDC~28VDC
Input Allowable Loss	75mW
Maximum Load Current	3A
Peak Load Current	9A(100ms)
Open state leakage current	10uA
Load voltage (peak AC)	60VAC/60VDC
Output Loss	1.6W
Actuation Time	Average 2.46ms Max. 5.64ms
Reset Time	Average 0.22ms Max. 3.0ms
Highest Frequency	0.5 times/S
Insulation Resistance	1000MQ/500VDC
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35

Circuit Diagram

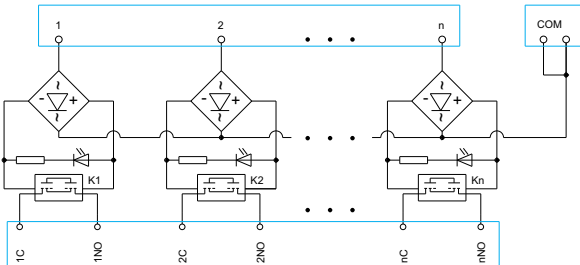

DM72-RME-04-PN-1-4D-00Z(H) DM72-RME-08-PN-1-4D-00Z(H)
DM72-RME-16-PN-1-4D-00Z(H)


Relay P/N

Panasonic relay P/N: AQZ202

© Please confirm the output contact capacity before use, do not exceed its scope.

Wiring Method

- Input control signal through 1~n.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

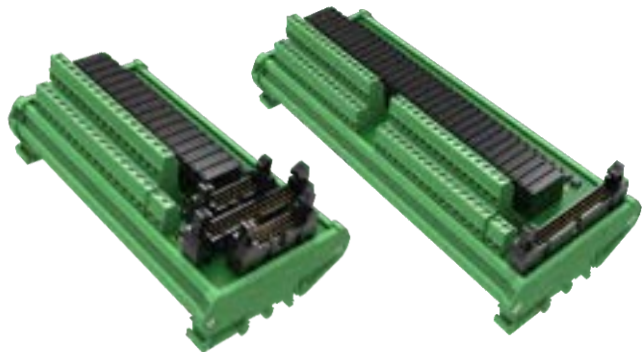


DM72-RMUS-16-PN-1-4M-00Z(H)
DM72-RMUS-32-PN-1-4M-00Z(H)


Features

- Including 16, 32 bit independent relay circuits.
- Switch NPN, PNP through jumper.
- The relay adopts 1NO node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

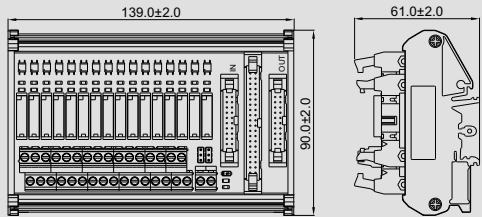


DM72-RMUS-16-PN-1-4M-00Z(H)

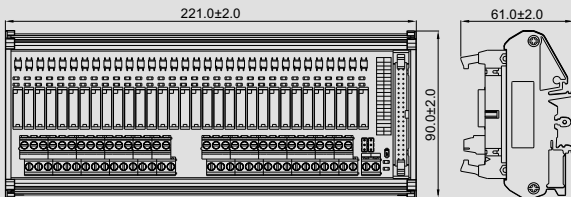


DM72-RMUS-32-PN-1-4M-00Z(H)

Circuit Diagram

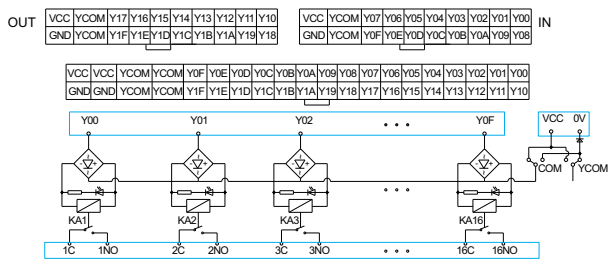

DM72-RMUS-16-PN-1-4M-00Z(H)

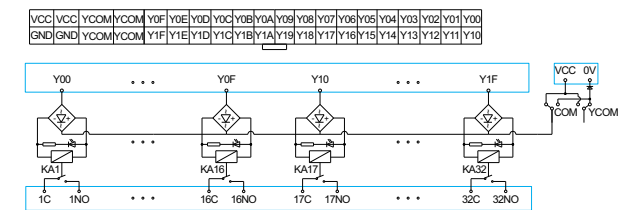

DM72-RMUS-32-PN-1-4M-00Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	5A
Load Type	1NO
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35
Relay Brand and Type	Panasonic APAN3124

Suitable PLC

MITSUBISHI Qseries	FX1NC-16MT/32MT	QY41P/QY42P
	FX2NC-16MT/32MT/64MT/96MT	QY71P/QH42P
	FX3UC-16MT/32MT/64MT/96MT	LY41NT1P / LY42NT1P


Related Products

DX210-2 DX210-4

Wiring Method

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 40P row insert 40 core connector or Insert 20P row wires 20P "IN".
- Choose one from two kinds of control signal connection methods, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

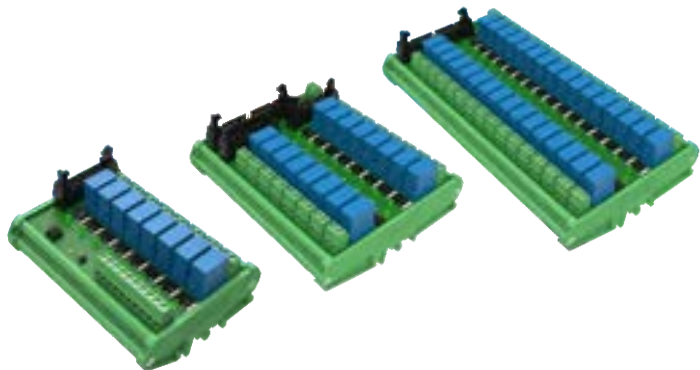


DM72-RMS-08-PN-1-4M-00Z(H)
DM108-RMS-16-PN-1-4M-00Z(H)
DM108-RMS-32-PN-1-4M-00Z(H)

Features


- Including 8, 16, 32 bit independent relay circuits.
- Switch NPN, PNP through jumper.
- The relay adopts 1N/O node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

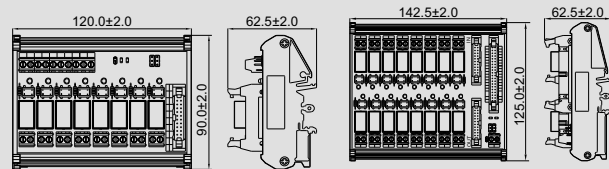


DM72-RMS-08-PN-1-4M-00Z(H)

DM108-RMS-16-PN-1-4M-00Z(H)

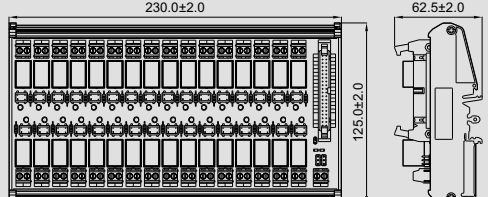


DM108-RMS-32-PN-1-4M-00Z(H)


Circuit Diagram

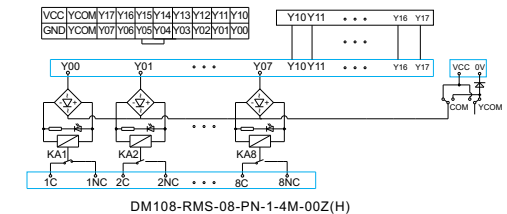

DM108-RMS-08-PN-1-4M-00Z(H)

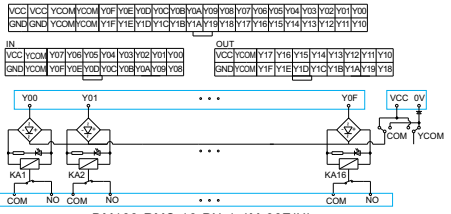

DM108-RMS-16-PN-1-4M-00Z(H)

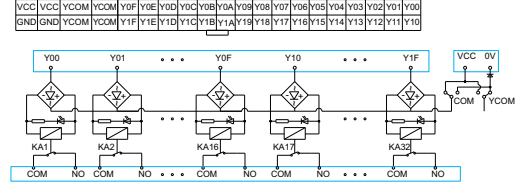

DM108-RMS-32-PN-1-4M-00Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	10A
Load Type	1NO
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35
Relay Brand and Type	TE QJE-SS-124HM

Suitable PLC

MITSUBISHI Qseries	FX1NC-16MT/32MT	QY41P/QY42P
	FX2NC-16MT/32MT/64MT/96MT	QY71P/QH42P
	FX3UC-16MT/32MT/64MT/96MT	LY41NT1P / LY42NT1P

Related Products


DX210-2 DX210-4

Wiring Method

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 20P row wires inserted into 20 core connectors.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B2. Users can make short connection according to their own requirements.

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 40P row insert 40 core connector or Insert 20P row wires 20P "IN".
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

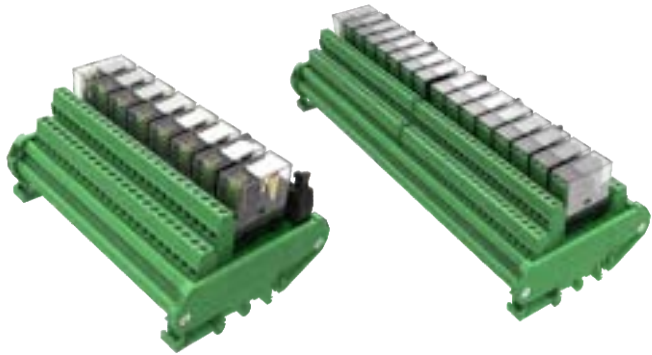


DM72-RM-08-PN-4-4M-10Z(H)
DM72-RM-16-PN-4-4M-10Z(H)


Features

- This module provides 8, 16 bit independent relay circuits.
- Switch NPN,PNP through jumper.
- The relay adopts 2NO/2NC node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

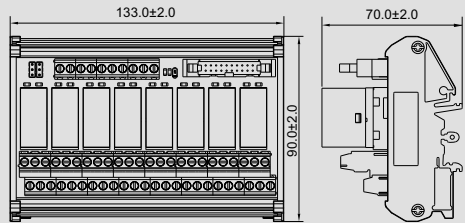


DM72-RM-08-PN-4-4M-10Z(H)

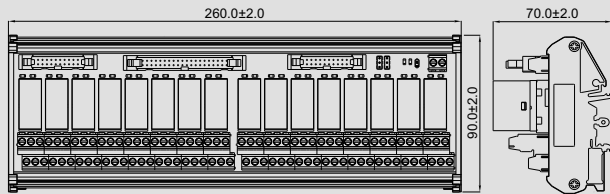


DM72-RM-16-PN-4-4M-10Z(H)

Circuit Diagram

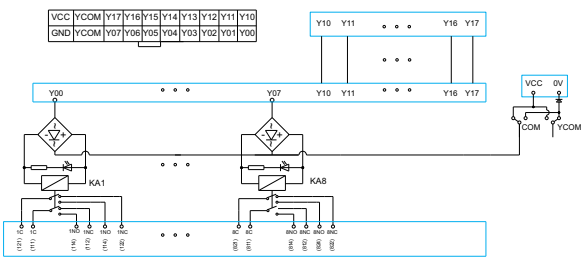

DM72-RM-08-PN-4-4M-10Z(H)

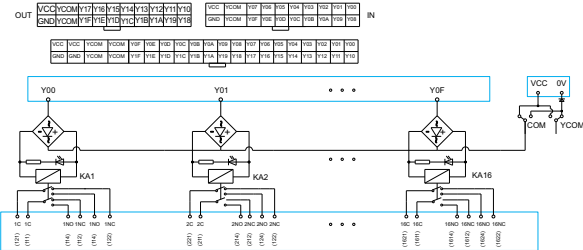

DM72-RM-16-PN-4-4M-10Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	5A
Load Type	2NO/2NC
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35

Relay P/N

Commonly used relays recommended:
10: Degson DRPB-2C-D24, 01: Omron G2R-2-DC24V

Suitable PLC

MITSUBISHI Qseries	FX1NC-16MT/32MT	QY41P/QY42P
	FX2NC-16MT/32MT/64MT/96MT	QY71P/QH42P
	FX3UC-16MT/32MT/64MT/96MT	LY41NT1P / LY42NT1P


Related Products

DX210-2 DX210-4

Wiring Method

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 20P row wires inserted into 20 core connectors.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B2.Users can make short connection according to their own requirements.

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 40P row insert 40 core connector or Insert 20P row wires 20P "IN".
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4.Users can make short connection according to their own requirements.

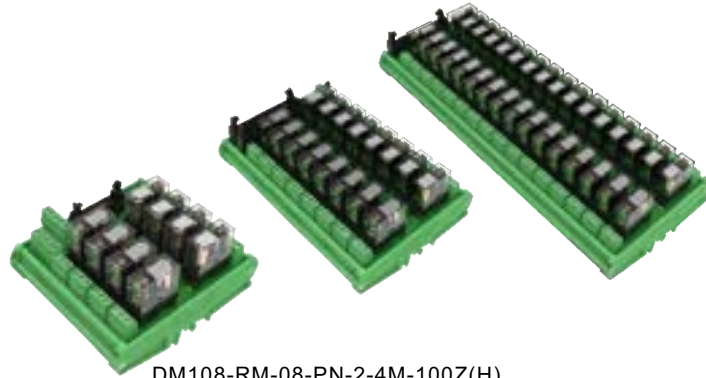


DM108-RM-08-PN-2-4M-100Z(H)
DM108-RM-16-PN-2-4M-100Z(H)
DM108-RM-32-PN-2-4M-100Z(H)

Features


- This module provides 8, 16, 32 bit independent relay circuits.
- Switch NPN,PNP through jumper.
- The relay adopts 1NO/1NC node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

Dimensions

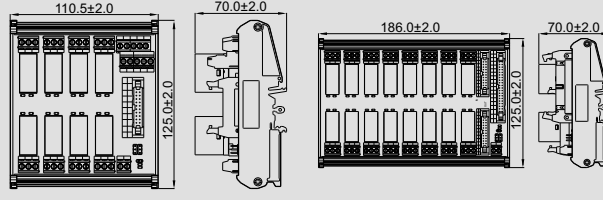


DM108-RM-08-PN-2-4M-100Z(H)

DM108-RM-16-PN-2-4M-100Z(H)

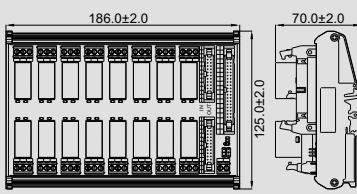


DM108-RM-32-PN-2-4M-100Z(H)


Circuit Diagram

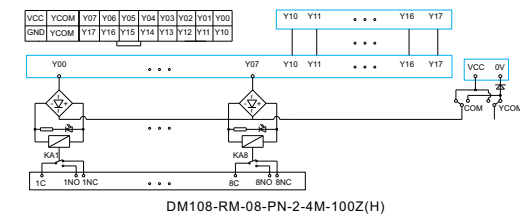

DM108-RM-08-PN-2-4M-100Z(H)

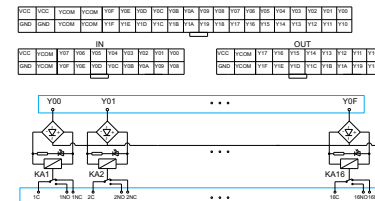

DM108-RM-16-PN-2-4M-100Z(H)

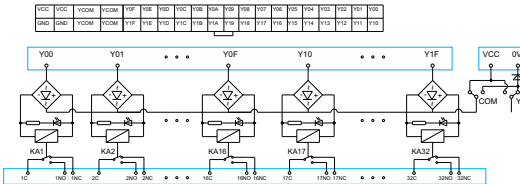

DM108-RM-32-PN-2-4M-100Z(H)

Performance Parameters

Withstand Voltage	500VAC 50Hz (1min)
Insulation Resistance	1000MQ/ 500VDC
Coil Voltage	24VDC
Load Voltage	30VDC/240VAC
Load Current	16A
Load Type	1NO + 1NC
Ambient Temperature	-20~+70°C
Maximum Torque	0.4Nm(3.54Lb-In)
Wire Range	26-12AWG
Mounting	TS-15 TS-32 TS-35

Relay P/N

Commonly used relays recommended:
100: Degson DRPB-1CH-D24, 01: Omron G2R-1-E-DC24V

Suitable PLC

MITSUBISHI Qseries	FX1NC-16MT/32MT	QY41P/QY42P
	FX2NC-16MT/32MT/64MT/96MT	QY71P/QH42P
	FX3UC-16MT/32MT/64MT/96MT	LY41NT1P / LY42NT1P

Related Products

DX210-2 DX210-4

Wiring Method

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 20P row wires inserted into 20 core connectors.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B2.Users can make short connection according to their own requirements.

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 40P row insert 40 core connector or Insert 20P row wires 20P "IN".
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4.Users can make short connection according to their own requirements.

- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

DPS1-75W Power Supplies



Features

- DC Output Voltage Adjustable
- Universal AC Input 90~264V
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Free Air Convection Design
- Three Years Warranty

Specification


Product name	DPS1-75W-D12-02Z(H)	DPS1-75W-D24-02Z(H)	DPS1-75W-D48-02Z(H)
Input Parameter			
Input voltage range	90 ~264VAC, 127 ~ 370VDC[DC input by connecting AC/L(+),AC/N(-)]		
Input frequency range	47...63Hz		
Input current	1.45A/115VAC 0.9A/230VAC		
Impulse current	35A/230VAC		
Power consumption	0.5W		
Connection mode	Terminal blocks		
Output Parameter			
Output efficiency	85.5%	88%	88%
Output rated voltage	12V	24V	48V
Range of output voltage	12~14V	24~28V	48~55V
Output rated current	6.3A	3.2A	1.6A
Rated power	75.6W	76.8W	76.8W
Voltage ripple (20MHz)	80 mVp-p	120 mVp-p	150 mVp-p
Setup , Rise time	1200ms, 60ms/230VAC at full load 2000ms, 60ms/115VAC at full load		
Line regulation	±0.5%		
Load regulation	±1.0%		
Leakage current	<1mA/240VAC		
Coefficient of temperature drift	±0.03%/°C(0~50℃)		
Power-down hold time	60ms/230VAC at fullload 12ms/115VAC at full load		
Switching frequency	50Khz~80Khz		
Connection mode	Terminal blocks		

DPS1-75W Power Supplies



Product name	DPS1-75W-D12-02Z(H)	DPS1-75W-D24-02Z(H)	DPS1-75W-D48-02Z(H)
Mechanical Parameter			
Size (L X W X D)	125×32×100.5mm		
Weight	0.51kg		
Shell material	Metal		
DC light	OK		
Environmental Parameter			
Working temperature	-20 ~ +70 °C (Refer to "Derating Curve")		
Storage temperature	-40 °C ~ + 85 °C		
Storage humidity	10...95%RH non-condensing		
Working humidity	20 ~ 95% RH non-condensing		
Vibration test	IEC 60068-2-6(X, Y, Z axis, 2G)		
Operational altitude	2000m		
Security Parameter			
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, recovers automatically		
Overvoltage protection	14~17V	29~33V	56~65V
	Protection type : Constant current limiting, recovers automatically after fault condition is removed		
Overheat protection	Protection type : Shut down o/p voltage, re-power on to recover		
Short circuit protection	3.2A shutdown, restart and restore		
Safety standard	UL508,BS/EN62368-1		
Mean Time between failures	2343.7K hrs min. Telordia SR-332 (Belcore)		

Dimensional Drawing

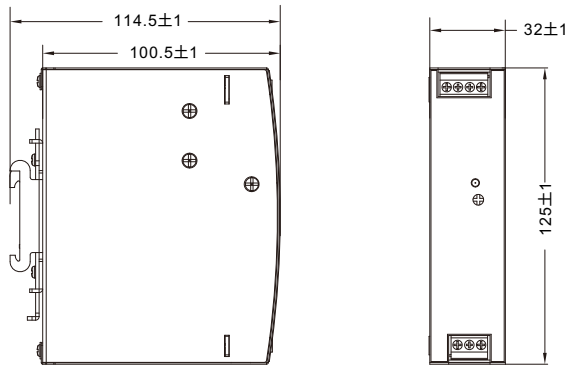

DPS1-120 W Power Supplies



Features

- DC Output Voltage Adjustable
- Universal AC Input 90~264V
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Free Air Convection Design
- Three Years Warranty

Specification


Product name	DPS1-120W-D12-02Z(H)	DPS1-120W-D24-02Z(H)	DPS1-120W-D48-02Z(H)
Input Parameter			
Input voltage range	90 ~264VAC, 127 ~ 370VDC[DC input by connecting AC/L(+),AC/N(-)]		
Input frequency range	47...63Hz		
Input current	2.25A/115VAC 1.3A/230VAC		
Impulse current	35A/230VAC		
Power consumption	0.6W		
Connection mode	Terminal blocks		
Output Parameter			
Output efficiency	85.5%	88%	89%
Output rated voltage	12V	24V	48V
Range of output voltage	12~14V	24~28V	48~55V
Output rated current	10A	5A	2.5A
Rated power	120W		
Voltage ripple (20MHz)	100 mVp-p	120 mVp-p	150 mVp-p
Setup , Rise time	1200ms, 60ms/230VAC at full load 2500ms, 60ms/115VAC at full load		
Line regulation	±0.5%		
Load regulation	±1.0%		
Leakage current	<1mA/240VAC		
Coefficient of temperature drift	±0.03 %/°C(0~50℃)		
Power-down hold time	16ms/230VAC at fullload 10ms/115VAC at full load		
Switching frequency	50Khz~80Khz		
Connection mode	Terminal blocks		

DPS1-120 W Power Supplies



Product name	DPS1-120W-D12-02Z(H)	DPS1-120W-D24-02Z(H)	DPS1-120W-D48-02Z(H)
Mechanical Parameter			
Size (L X W X D)	125×40×113mm		
Weight	0.6kg		
Shell material	Metal		
DC light	OK		
Environmental Parameter			
Working temperature	-20 ~ +70 °C (Refer to "Derating Curve")		
Storage temperature	-40~+85 °C, 10 ~95% RH		
Storage humidity	10...95%RH non-condensing		
Working humidity	20 ~ 95% RH non-condensing		
Vibration test	IEC 60068-2-6(X, Y, Z axis, 2G)		
Operational altitude	2000m		
Security Parameter			
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, recovers automatically		
Overvoltage protection	14~17V	29~33V	56~65V
	Protection type : Constant current limiting, recovers automatically after fault condition is removed		
Overheat protection	Protection type : Shut down o/p voltage, re-power on to recover		
Short circuit protection	3.2A shutdown, restart and restore		
Safety standard	UL508,BS/EN62368-1		
Mean Time between failures	2241.28K hrs min. Telcordia SR-332 (Bellcore)		

Dimensional Drawing

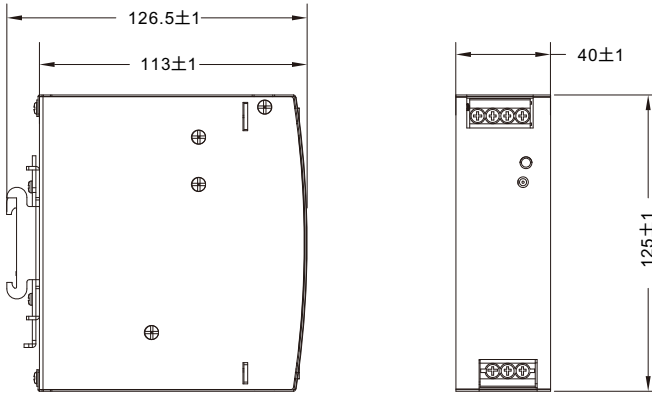

DPS1-240W Power Supplies



Features

- DC Output Voltage Adjustable
- Universal AC Input 90~264V
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Free Air Convection Design
- Three Years Warranty

Specification


Product name	DPS1-240W-D24-02Z(H)	DPS1-240W-D48-02Z(H)
Input Parameter		
Input voltage range	90 ~264VAC,127 ~ 370VDC[DC input by connecting AC/L(+),AC/N(-)]	
Input frequency range	47...63Hz	
Input current	2.5A/115VAC 1.3A/230VAC	
Impulse current	35A/230VAC	
Power consumption	5W	
Connection mode	Terminal blocks	
Output Parameter		
Output efficiency	87%	88%
Output rated voltage	24V	48V
Range of output voltage	24~28V	48~55V
Output rated current	10A	5A
Rated power	240W	
Voltage ripple (20MHz)	150 mVp-p	
Setup , Rise time	1500ms, 100ms/230VAC at full load 3000ms, 100ms/115VAC at full load	
Line regulation	±0.5%	
Load regulation	±1.0%	
Leakage current	<1mA/240VAC	
Coefficient of temperature drift	±0.03%/°C(0~50℃)	
Power-down hold time	16ms/230VAC at fullload 12ms/115VAC at full load	
Switching frequency	50Khz~80Khz	
Connection mode	Terminal blocks	

DPS1-240W Power Supplies



Product name	DPS1-240W-D24-02Z(H)	DPS1-240W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	125×63×113.5mm	
Weight	1kg	
Shell material	Metal	
DC light	OK	
Environmental Parameter		
Working temperature	-20 ~ +70 °C (Refer to "Derating Curve")	
Storage temperature	-40°C ~ + 85°C	
Storage humidity	10...95%RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	IEC 60068-2-6(X, Y, Z axis, 2G)	
Operational altitude	2000m	
Security Parameter		
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, recovers automatically	
Overvoltage protection	29~33V	56~65V
	Protection type : Constant current limiting, recovers automatically after fault condition is removed	
Overheat protection	Protection type : Shut down o/p voltage, re-power on to recover	
Short circuit protection	10-13A Hiccup Protection	
Safety standard	UL508,BS/EN62368-1	
Mean Time between failures	1398.4K hrs min. Telordia SR-332 (Bellcore)	

Dimensional Drawing

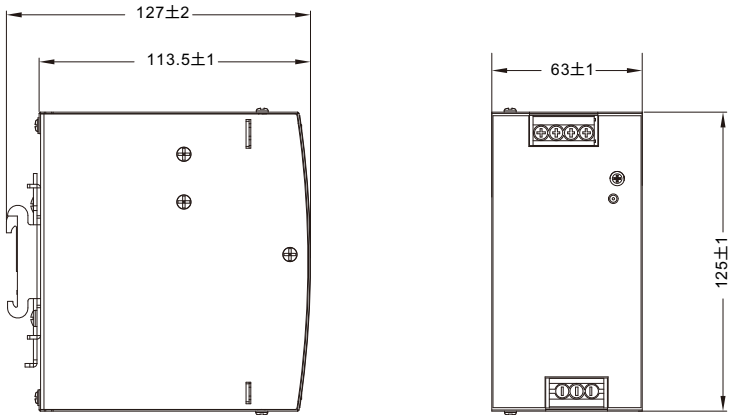

DPS1-480W Power Supplies



Features

- DC Output Voltage Adjustable
- Universal AC Input 90~264V
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Free Air Convection Design
- Three Years Warranty

Specification


Product name	DPS1-480W-D24-02Z(H)	DPS1-480W-D48-02Z(H)
Input Parameter		
Input voltage range	90 ~264VAC, 127 ~ 370VDC[DC input by connecting AC/L(+),AC/N(-)]	
Input frequency range	47...63Hz	
Input current	4.8A/115VAC 2.4A/230VAC	
Impulse current	35A/230VAC	
Power consumption	7W	
Connection mode	Terminal blocks	
Output Parameter		
Output efficiency	92%	
Output rated voltage	24V	48V
Range of output voltage	24~28V	48~55V
Output rated current	20A	10A
Rated power	480W	
Voltage ripple (20MHz)	150 mVp-p	
Setup , Rise time	1500ms, 100ms/230VAC at full load 3000ms, 100ms/115VAC at full load	
Line regulation	±0.5%	
Load regulation	±1.0%	
Leakage current	<1mA/240VAC	
Coefficient of temperature drift	±0.03%/°C(0~50℃)	
Power-down hold time	16ms/230VAC at fullload 12ms/115VAC at full load	
Switching frequency	50Khz~80Khz	
Connection mode	Terminal blocks	

DPS1-480W Power Supplies



Product name	DPS1-480W-D24-02Z(H)	DPS1-480W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	125×85.5×129mm	
Weight	1.5kg	
Shell material	Metal	
DC light	OK	
Environmental Parameter		
Working temperature	-20 ~ +70 °C (Refer to"Derating Curve")	
Storage temperature	-40°C ~ + 85°C	
Storage humidity	10...95%RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	IEC 60068-2-6(X, Y, Z axis, 2G)	
Operational altitude	2000m	
Security Parameter		
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, recovers automatically	
Overvoltage protection	29~33V	56~65V
	Protection type : Constant current limiting, recovers automatically after fault condition is removed	
Overheat protection	Protection type : Shut down o/p voltage, re-power on to recover	
Short circuit protection	20-25A latching, reloading and restarting	
Safety standard	UL508,BS/EN62368-1	
Mean Time between failures	885.4K hrs min. Telordia SR-332 (Bellcore)	

Dimensional Drawing

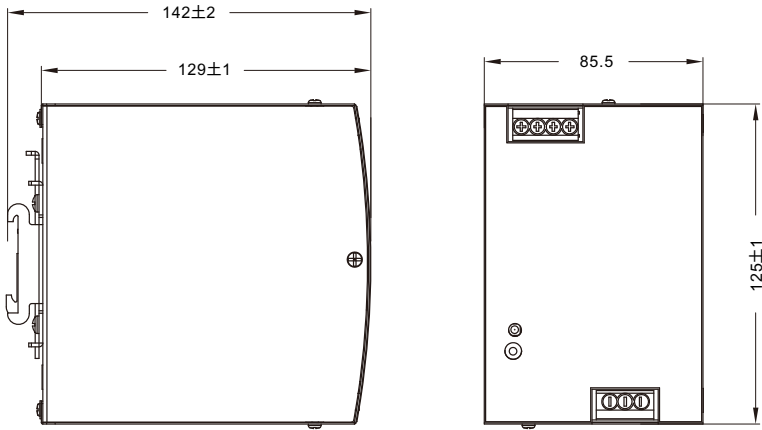




Features

- Higher Peak load capability
- Parallel connections with max 4 PSU up to 3840W
- Built-in DC OK Contact
- Built-in Active PFC Function
- DC Output Voltage Adjustable
- Three Years Warranty

Specification

Product name	DPS1-960W-D24-02Z(H)	DPS1-960W-D48-02Z(H)
Input Parameter		
Input voltage range	180~264VAC 257~370VDC	
Input frequency range	47...63Hz	
Input Current	6A/230VAC	
Impulse current	50A/230VAC cold start	
Power consumption	7W	
Connection mode	Terminal blocks	
Output Parameter		
Output efficiency	94%	
Output rated voltage	24V	48V
Range of output voltage	24~28V	48~55V
Output rated current	40A	20A
Rated power	960W	
Voltage ripple (20MHz)	180 mVp-p	250 mVp-p
Setup , Rise time	1000ms, 100ms/230VAC at full load	
Line regulation	±0.5%	
Load regulation	±1.0%	
Leakage current	<3.5mA /240VAC	
Coefficient of temperature drift	±0.03%/°C(0~50C)	
Power-down hold time	14ms/230VAC at full load	
Switching frequency	50Khz~80Khz	
Connection mode	Terminal blocks	

Product name	DPS1-960W-D24-02Z(H)	DPS1-960W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	125.2×110×150mm	
Weight	2.47kg	
Shell material	Metal	
DC light	OK	
Environmental Parameter		
Working temperature	-30 ~ +70 °C (Refer to "Derating Curve")	
Storage temperature	-40°C ~ + 85°C	
Storage humidity	10 ~ 95% RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	IEC 60068-2-6(X, Y, Z axis, 2G)	
Operational altitude	2000m	
Security Parameter		
Overcurrent protection range	Normally works within 105 ~ 130% rated output power for more than 3 seconds and then shut down o/p voltage with auto-recovery after 30 seconds if the peak load condition is removed.Constant current limiting within 130 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage, re-power on to recover	
Overvoltage protection	29~33V	56~65V
	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down	
Overheat protection	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down	
Short circuit protection	Restart and restore	
Safety standard	UL508,BS/EN62368-1	
Mean Time between failures	561.17K hrs min. Telcordia SR-332 (Bellcore)	
Dimensional Drawing		

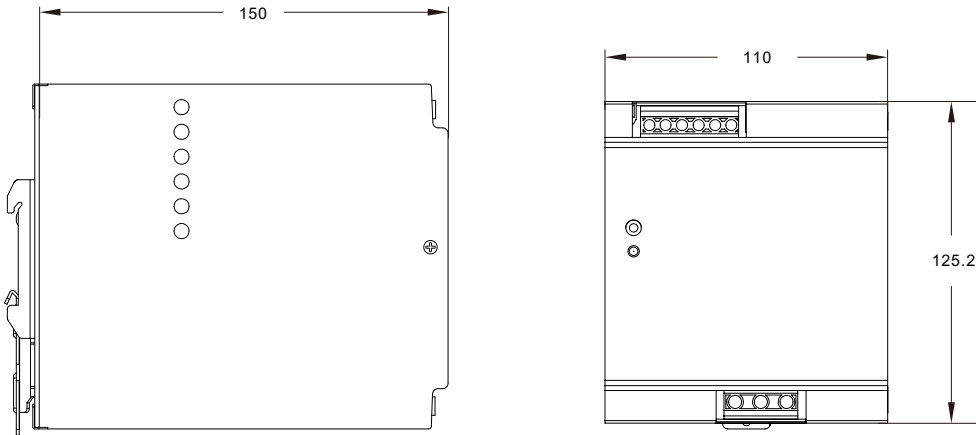



Features


- Single or Two Phase Ultra Wide Input Range 180~550 VAC
- Over Voltage Category III
- Built-in DC OK Contact
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Bulit-in Constant Current Limiting Circuit
- Three Years Warranty

Specification

Product name	DPS1-WI-60W-D5-02Z(H)		DPS1-WI-60W-D12-02Z(H)		DPS1-WI-60W-D24-02Z(H)		DPS1-WI-60W-D48-02Z(H)	
Input Parameter								
Input voltage range	180 ~ 550VAC 254 ~780VDC							
Input frequency range	47...63Hz							
Input Current	0.4A/400Vac 0.7A/230Vac							
Impulse current	COLD START 50A							
Power consumption	3W							
Connection mode	Terminal blocks							
Output Parameter								
Output efficiency	83.5%/400Vac		86.5%/400Vac		89%/400Vac		90.5%/400Vac	
Output rated voltage	5V		12V		24V		48V	
Range of output voltage	5-6V		12-15V		24-29V		48-57V	
Output rated current	10A		5A		2.5A		1.25A	
Rated power	50W		60W		60W		60W	
Voltage ripple (20MHz)	100 mVp-p		120 mVp-p		150 mVp-p		200 mVp-p	
Setup , Rise time	1000ms ,70ms /400VAC at full load 2000ms ,70ms /230VAC at full load							
Line regulation	±0.5%							
Load regulation	±1.5%		±0.5%		±0.5%		±0.5%	
Leakage current	<2mA /530Vac							
Coefficient of temperature drift	±0.03%/°C(0~60℃)							
Power-down hold time	20ms /400VAC at full load 10ms /230VAC at full load							
Switching frequency	50Khz~80Khz							
Connection mode	Terminal blocks							

Product name	DPS1-WI-60W-D5-02Z(H)	DPS1-WI-60W-D12-02Z(H)	DPS1-WI-60W-D24-02Z(H)	DPS1-WI-60W-D48-02Z(H)
Mechanical Parameter				
Size (L X W X D)	32×100.5×125mm			
Weight	0.45kg			
Shell material	Metal			
DC light	OK			
DC OK contact	30VDC 1A resistive load			
Environmental Parameter				
Working temperature	-30 ~ +85 °C (Refer to “Derating Curve”)			
Storage temperature	-40°C ~ + 85°C			
Storage humidity	10...95%RH non-condensing			
Working humidity	20 ~ 95% RH non-condensing			
Vibration test	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each alongX, Y Z axes; Mounting clip: Compliance to IEC60068-2-6.			
Operational altitude	2000m			
Security Parameter				
Overcurrent protection range	105 ~ 135% rated output power Hiccup mode when output voltage <50%, recovers automatically after fault condition is removed. Constant current limiting within 50% ~ 100% rated output voltage, recovers automatically after fault condition is removed			
Overvoltage protection	6.2-7.2V	16-18V	31-37V	58-60.5V
	Protection type : Shut down o/p voltage, re-power on to recover			
Overheat protection	Protection type : Shut down o/p voltage, re-power on to recover			
Short circuit protection	Hiccup mode			
Safety standard	UL61010-1,UL61010-2-201,BS EN/EN62368-1			
Mean Time between failures	1600K hrs min. Telcordia SR-332 (Bellcore)			

Dimensional Drawing

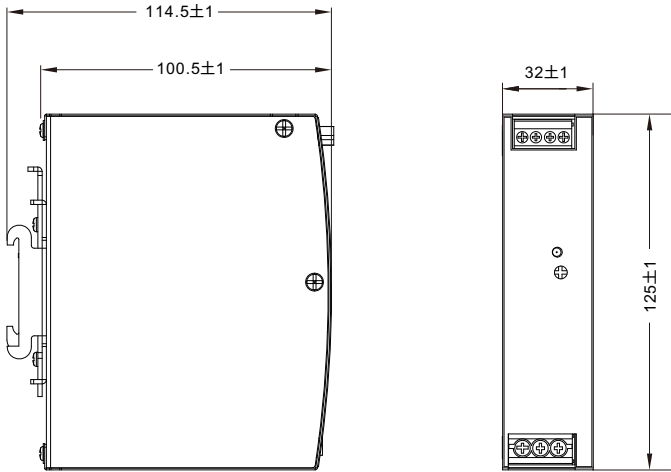



Features


- Single or Two Phase Ultra Wide Input Range 180~550VAC
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Built-in DC OK Contact
- Bulit-in Constant Current Limiting Circuit
- Three Years Warranty

Specification

Product name	DPS1-WI-120W-D12-02Z(H)	DPS1-WI-120W-D24-02Z(H)	DPS1-WI-120W-D48-02Z(H)
Input Parameter			
Input voltage range	180 ~ 550VAC 254 ~780VDC		
Input frequency range	47 ...63Hz		
Input Current	0.4A/400Vac 1.2A/230Vac		
Impulse current	COLD START 50A		
Power consumption	3W		
Connection mode	Terminal blocks		
Output Parameter			
Output efficiency	89.5%/400Vac	91.0%/400Vac	92.0%/400Vac
Output rated voltage	12V	24V	48V
Range of output voltage	12~15V	24~29V	48~58V
Output rated current	10A	5A	2.5A
Rated power	120W		
Voltage ripple (20MHz)	120 mVp-p	120 mVp-p	150 mVp-p
Setup , Rise time	1000ms ,70ms /400VAC at full load 2000ms ,70ms /230VAC at full load		
Line regulation	±0.5%		
Load regulation	±0.5%		
Leakage current	<3.5mA / 530Vac		
Coefficient of temperature drift	±0.03%/°C(0~50°C)		
Power-down hold time	18ms /400VAC at full load 18ms /230VAC at full load		
Switching frequency	50Khz~80Khz		
Connection mode	Terminal blocks		

Product name	DPS1-WI-120W-D12-02Z(H)	DPS1-WI-120W-D24-02Z(H)	DPS1-WI-120W-D48-02Z(H)
Mechanical Parameter			
Size (L X W X D)	40×113×125mm		
Weight	0.65kg		
Shell material	Metal		
DC light	OK		
DC OK contact	30VDC 1A resistive load		
Environmental Parameter			
Working temperature	-25 ~ +70 °C (Refer to "Derating Curve")		
Storage temperature	-40°C ~ + 85°C		
Storage humidity	10...95%RH non-condensing		
Working humidity	20 ~ 95% RH non-condensing		
Vibration test	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each alongX,Y Z axes; Mounting clip: Compliance to IEC60068-2-6.		
Operational altitude	2000m		
Security Parameter			
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, recoversautomatically after fault condition is removed		
Overvoltage protection	15~17V	29~33V	58~65V
	Protection type : Shut down o/p voltage, re-power on to recover		
Overheat protection	Shut down o/p voltage, recovers automatically after temperaturegoes down		
Short circuit protection	Self-recovery		
Safety standard	UL61010-1,UL61010-2-201,BS EN/EN62368-1		
Mean Time between failures	1600K hrs min. Telcordia SR-332 (Bellcore)		

Dimensional Drawing

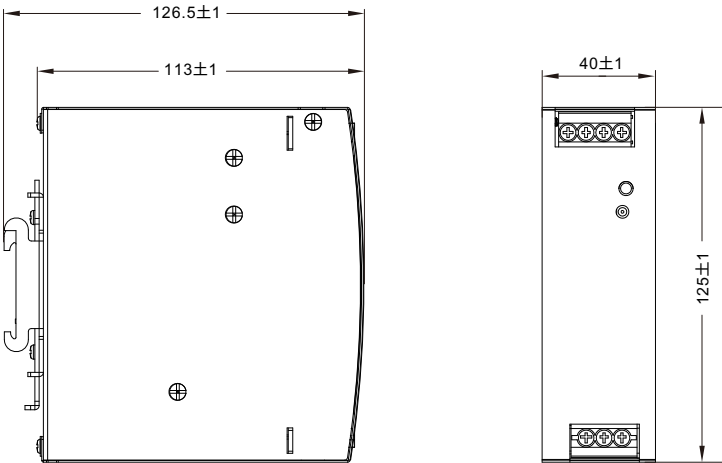



Features


- Single or Two Phase Ultra Wide Input Range 180~550VAC
- Built-in Active PFC Circuit
- Built-in DC OK Contact
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Built-in Constant Current Limiting Circuit
- High Efficiency 91% and Lower Power Dissipation
- Three Years Warranty

Specification

Product name	DPS1-WI-240W-D24-02Z(H)	DPS1-WI-240W-D48-02Z(H)
Input Parameter		
Input voltage range	180 ~ 550VAC 254 ~780VDC	
Input frequency range	47...63Hz	
Input current	1A/400Vac 2A/230Vac	
Impulse current	COLD START 50A	
Power consumption	6W	
Connection mode	Terminal blocks	
Output Parameter		
Output efficiency	91%	
Output rated voltage	24V	48V
Range of output voltage	24~28V	48~55V
Output rated current	10A	5A
Rated power	240W	
Voltage ripple (20MHz)	150mVp-p	
Setup , Rise time	800ms, 150ms/400Vac at full load 1500ms, 150ms/230Vac at full load	
Line regulation	±0.5%	
Load regulation	±1.0%	
Leakage current	<3.5mA / 530Vac	
Coefficient of temperature drift	±0.03%/°C(0~50°C)	
Power-down hold time	18ms/400Vac at full load 18ms/230Vac at full load	
Switching frequency	50Khz~80Khz	
Connection mode	Terminal blocks	

Product name	DPS1-WI-240W-D24-02Z(H)	DPS1-WI-240W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	63×113.5×125mm	
Weight	1kg	
Shell material	Metal	
DC light	OK	
DC OK contact	60VDC 0.3A, 30VDC 1A, 30VAC 0.5A resistive load	
Environmental Parameter		
Working temperature	-30 ~ +70 °C (Refer to "Derating Curve")	
Storage temperature	-40°C ~ + 85°C	
Storage humidity	10...95%RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each alongX,Y Z axes; Mounting clip: Compliance to IEC60068-2-6.	
Operational altitude	2000m	
Security Parameter		
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, unit will shut down after 3 sec., auto-recovery after 1 minute if the fault condition is removed.	
Overvoltage protection	29~33V	56~65V
	Protection type: Shut down o/p voltage, auto-recovery after 1 minute if the fault condition is removed.	
Overheat protection	90 °C±5°C (TSW) detect on heat sink of power switch.Protection type : Shut down o/p voltage, recovers automatically after temperature goes down.	
Short circuit protection	Self-recovery	
Safety standard	UL61010-1,UL61010-2-201,BS EN/EN62368-1	
Mean Time between failures	900K hrs min. Telcordia SR-332 (Bellcore)	

Dimensional Drawing

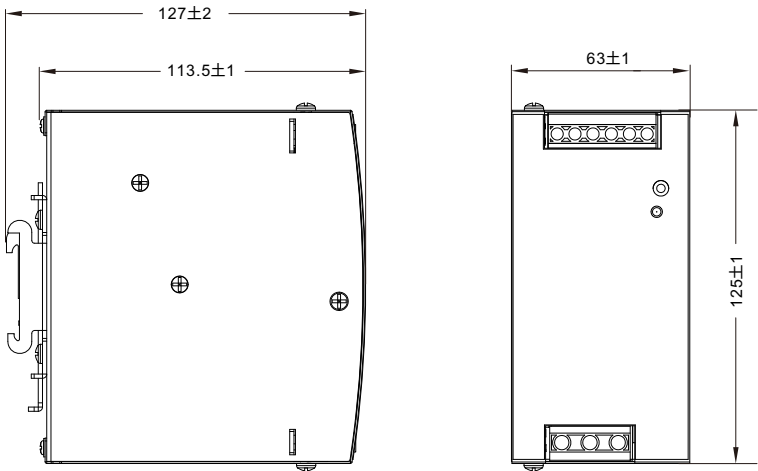



Features


- Single or Two Phase Ultra Wide Input Range 180~550VAC
- Built-in Active PFC Circuit
- Built-in DC OK Contact
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- Bulit-in Constant Current Limiting Circuit
- High Efficiency 93% and Lower Power Dissipation
- Three Years Warranty

Specification

Product name	DPS1-WI-480W-D24-02Z(H)		DPS1-WI-480W-D48-02Z(H)	
Input Parameter				
Input voltage range	180 ~ 550VAC 254 ~780VDC			
Input frequency range	47...63Hz			
Input current	1.6A/400Vac 4A/230Vac			
Impulse current	COLD START 50A			
Power consumption	7W			
Connection mode	Terminal blocks			
Output Parameter				
Output efficiency	91%		93%	
Output rated voltage	24V		48V	
Range of output voltage	24~28V		48~55V	
Output rated current	20A		10A	
Rated power	480W			
Voltage ripple (20MHz)	100 mVp-p		150 mVp-p	
Setup , Rise time	800ms, 150ms/400Vac at full load 1500ms, 150ms/230Vac at full load			
Line regulation	±0.5%			
Load regulation	±1.0%			
Leakage current	<3.5mA / 530Vac			
Coefficient of temperature drift	±0.03 %/°C(0~50℃)			
Power-down hold time	18ms/400Vac at full load 16ms/400Vac at full load			
Switching frequency	50Khz~80Khz			
Connection mode	Terminal blocks			

Product name	DPS1-WI-480W-D24-02Z(H)	DPS1-WI-480W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	85.5×129×125mm	
Weight	1.7kg	
Shell material	Metal	
DC light	OK	
DC OK contact	60VDC 0.3A, 30VDC 1A, 30VAC 0.5A resistive load	
Environmental Parameter		
Working temperature	-30 ~ +70 °C (Refer to "Derating Curve")	
Storage temperature	-40°C ~ + 85°C	
Storage humidity	10...95%RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	Component: 10 ~500Hz, 2G 10min./1cycle, 60min. each alongX,Y, Z axes; Mounting clip: Compliance to IEC60068-2-6.	
Operational altitude	2000m	
Security Parameter		
Overcurrent protection range	105 ~ 130% rated output power. Protection type : Constant current limiting, unit will shut down after 3 sec., auto-recovery after 1 minute if the fault condition is removed .	
Overvoltage protection	29~33V	56~65V
	Protection type: Shut down o/p voltage, auto-recovery after 1 minute if the fault condition is removed.	
Overheat protection	95 °C±5°C (TSW) detect on heat sink of power switch.Protection type : Shut down o/p voltage, recovers automatically after temperature goes down.	
Short circuit protection	Self-recovery	
Safety standard	UL61010-1,UL61010-2-201,BS EN/EN62368-1	
Mean Time between failures	700K hrs min. Telcordia SR-332 (Bellcore) ; 112.8K hrs min. MILHDBK-217F(25 C)	

Dimensional Drawing

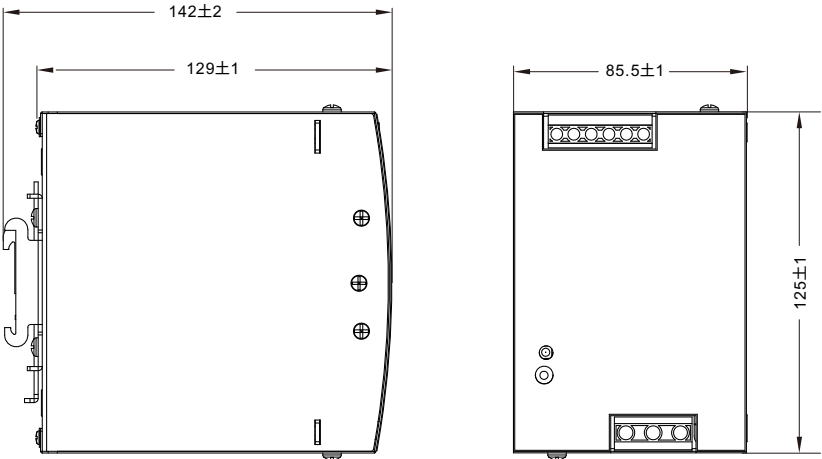



Features


- 3-Phase 340~550VAC Wide Range Input (2-phase operation possible)
- Built-in Passive PFC Function
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- DC OK Contact
- Built-in Constant Current Limiting Circuit
- High Efficiency 92% and Low Power Dissipation
- Full Power Between -30~+60°C
- Three Years Warranty

Specification

Product name	DPS3-240W-D24-02Z(H)	DPS3-240W-D48-02Z(H)
Input Parameter		
Input voltage range	Three-Phase 340 ~ 550VAC (Dual phase operation possible inconnecting L1,L3,FG or L2,L3,FG) or 480 ~780VDC	
Input frequency range	47...63Hz	
Input current	0.69A/400VAC 0.6A/500VAC	
Impulse current	COLD START 50A	
Power consumption	5W	
Connection mode	Terminal blocks	
Output Parameter		
Output efficiency	92%	
Output rated voltage	24V	48V
Range of output voltage	24~28V	48~55V
Output rated current	10A	5A
Rated power	240W	
Voltage ripple (20MHz)	100 mVp-p	120 mVp-p
Setup , Rise time	2000ms,60ms/400VAC at full load 1500ms, 60ms/500VAC at full load	
Line regulation	±0.5%	
Load regulation	±1.0%	
Leakage current	<2mA / 530VAC	
Coefficient of temperature drift	±0.05%/°C(0~60℃)	
Power-down hold time	20ms/400VAC at fullload 40ms/500VAC at full load	
Switching frequency	50Khz~80Khz	
Connection mode	Terminal blocks	

Product name	DPS3-240W-D24-02Z(H)	DPS3-240W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	63×113×125mm	
Weight	1kg	
Shell material	Metal	
DC light	OK	
DC OK contact	30VDC 1A, 30VAC 0.5A resistive load	
Environmental Parameter		
Working temperature	-30 ~ +70 °C (Refer to "Derating Curve")	
Storage temperature	-40°C ~ + 85°C	
Storage humidity	10 ~95% RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	Component:10 ~500Hz, 2G 10min./1cycle, 60min. each alongX,Y, Z axes; Mounting: Compliance to IEC60068-2-6	
Operational altitude	5000m	
Security Parameter		
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, unit will hiccup after 3 sec	
Overvoltage protection	30~36V	56~65V
	Protection type : Constant current limiting, recovers automatically after fault condition is removed	
Overheat protection	Shut down o/p voltage, recovers automatically after temperature goes down	
Short circuit protection	Hiccup mode	
Safety standard	UL61010-1,UL61010-2-201,BS EN/EN61558-1,BS ENEN61558-2-16	
Mean Time between failures	1500K hrs min. Telcordia SR-332(Bellcore)	

Dimensional Drawing

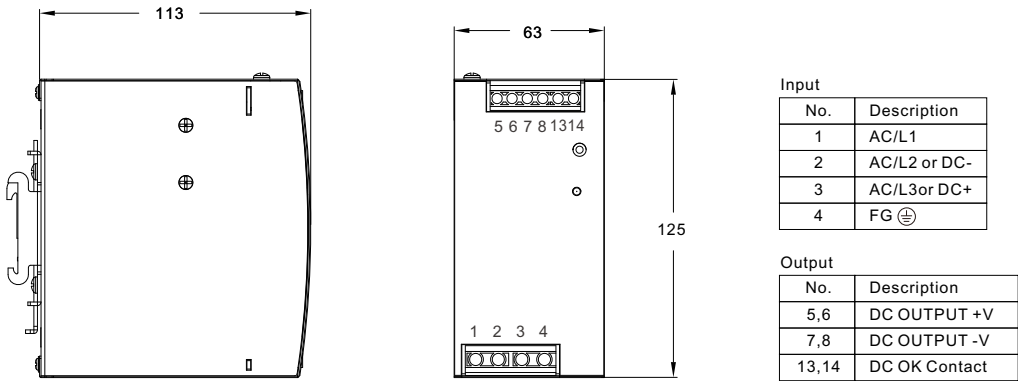

DPS3-480W Power Supplies



Features

- 3-Phase 340~550VAC Wide Range Input (2-phase operation possible)
- Built-in Passive PFC Function
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- DC OK Contact
- Built-in Constant Current Limiting Circuit
- High Efficiency 92% and Low Power Dissipation
- Full Power Between -30~+60°C
- Three Years Warranty

Specification


Product name	DPS3-480W-D24-02Z(H)	DPS3-480W-D48-02Z(H)
Input Parameter		
Input voltage range	Three-Phase 340 ~ 550VAC (Dual phase operation possible inconnecting L1,L3,FG or L2,L3,FG) or 480 ~780VDC	
Input frequency range	47...63Hz	
Input current	0.85A/400VAC 0.7A/500VAC	
Impulse current	COLD START 50A	
Power consumption	7W	
Connection mode	Terminal blocks	
Output Parameter		
Output efficiency	92%	
Output rated voltage	24V	48V
Range of output voltage	24~28V	48~55V
Output rated current	20A	10A
Rated power	480W	
Voltage ripple (20MHz)	150 mVp-p	
Setup , Rise time	1200ms,60ms/400VAC at full load 800ms, 60ms/500VAC at full load	
Line regulation	±0.5%	
Load regulation	±1.0%	
Leakage current	<3.5/ 530VAC	
Coefficient of temperature drift	±0.03%/°C(0~50℃)	
Power-down hold time	20ms/400VAC at fullload 20ms/500VAC at full load	
Switching frequency	50Khz~80Khz	
Connection mode	Terminal blocks	

DPS3-480W Power Supplies



Product name	DPS3-480W-D24-02Z(H)	DPS3-480W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	85.5×129×125mm	
Weight	1.51kg	
Shell material	Metal	
DC light	OK	
DC OK contact	60VDC 0.3A, 30VDC 1A, 30VAC 0.5A resistive load	
Environmental Parameter		
Working temperature	-30 ~ +70 ℃(Refer to "Derating Curve")	
Storage temperature	-40℃ ~ + 85℃	
Storage humidity	10 ~95% RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	Component:10 ~500Hz, 2G 10min./1cycle, 60min. each alongX,Y, Z axes; Mounting: Compliance to IEC60068-2-6	
Operational altitude	5000m	
Security Parameter		
Overcurrent protection range	105 ~ 130% rated output power Protection type : Constant current limiting, unit will hiccup after 3 sec	
Overvoltage protection	29~33V	56~65V
	Protection type: Shut down o/p voltage, re-power on to recover	
Overheat protection	Shut down o/p voltage, recovers automatically after temperature goes down	
Short circuit protection	Locked .Reboot Recovery	
Safety standard	UL61010-1,UL61010-2-201,BS EN/EN61558-1,BS ENEN61558-2-16	
Mean Time between failures	1000K hrs min. Telcordia SR-332(Bellcore)	

Dimensional Drawing

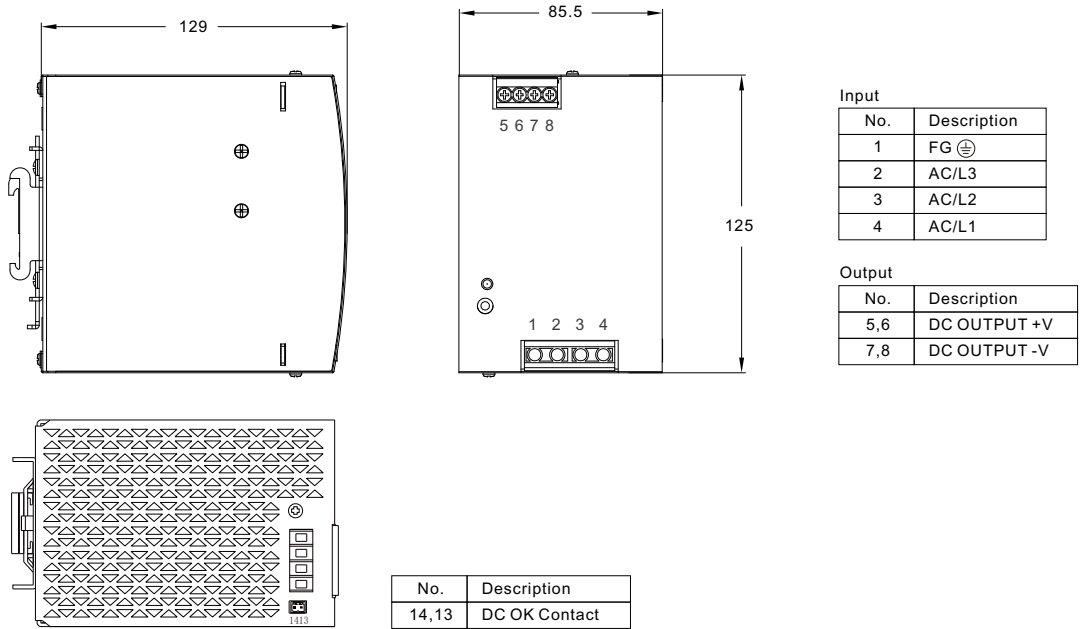




Features

- 3-Phase 340~550VAC Wide Range Input (2-phase operation possible)
- Built-in Passive PFC Function
- Protection: Short Circuit/Overload/Over Voltage/Over Temperature
- DC OK Contact
- Built-in Constant Current Limiting Circuit
- Higher Efficiency and Low Power Dissipation
- Parallel Connections Withmax 4 PSU up to 3840W
- Three Years Warranty

Specification

Product name	DPS3-960W-D24-02Z(H)	DPS3-960W-D48-02Z(H)
Input Parameter		
Input voltage range	Three-Phase 340 ~ 550VAC (Dual phase operation possible inconnecting L1,L3,FG or L2,L3,FG) or 480 ~780VDC	
Input frequency range	47...63Hz	
Input current	2A/400VAC 1.4A/500VAC	
Impulse current	COLD START 60A	
Power consumption	15W	
Connection mode	Terminal blocks	
Output Parameter		
Output efficiency	92%	
Output rated voltage	24V	48V
Range of output voltage	24~28V	48~55V
Output rated current	40A	20A
Rated power	960W	
Voltage ripple (20MHz)	180 mVp-p	250 mVp-p
Setup , Rise time	1200ms,60ms/400VAC at full load 800ms, 60ms/500VAC at full load	
Line regulation	±0.5%	
Load regulation	±1.0%	
Leakage current	<3.5/ 530VAC	
Coefficient of temperature drift	±0.03%/°C(0~50°C)	
Power-down hold time	20ms/400VAC at fullload 20ms/500VAC at full load	
Switching frequency	50Khz~80Khz	
Connection mode	Terminal blocks	

Product name	DPS3-960W-D24-02Z(H)	DPS3-960W-D48-02Z(H)
Mechanical Parameter		
Size (L X W X D)	110×125.2×152.3mm	
Weight	2.47kg	
Shell material	Metal	
DC light	OK	
DC OK contact	30VDC 1A resistive load	
Environmental Parameter		
Working temperature	-30 ~ +70 °C (Refer to "Derating Curve")	
Storage temperature	-40°C ~ + 85°C	
Storage humidity	10 ~95% RH non-condensing	
Working humidity	20 ~ 95% RH non-condensing	
Vibration test	Component:10 ~500Hz, 2G 10min./1cycle, 60min. each alongX,Y, Z axes; Mounting: Compliance to IEC60068-2-6	
Operational altitude	2000m	
Security Parameter		
Overcurrent protection range	105 ~ 130% rated output power Protection type: Constant current limiting, unit will shut down after3 sec, re-power on to recover	
Overvoltage protection	29~33V	56~65V
	Protection type: Shut down o/p voltage, re-power on to recover	
Overheat protection	Shut down o/p voltage, recovers automatically after temperature goes down	
Short circuit protection	Locked .Reboot Recovery	
Safety standard	UL61010-1,UL61010-2-201,BS EN/EN62368-1	
Mean Time between failures	550.04K hrs min. Telcordia SR-332(Bellcore)	
Dimensional Drawing		

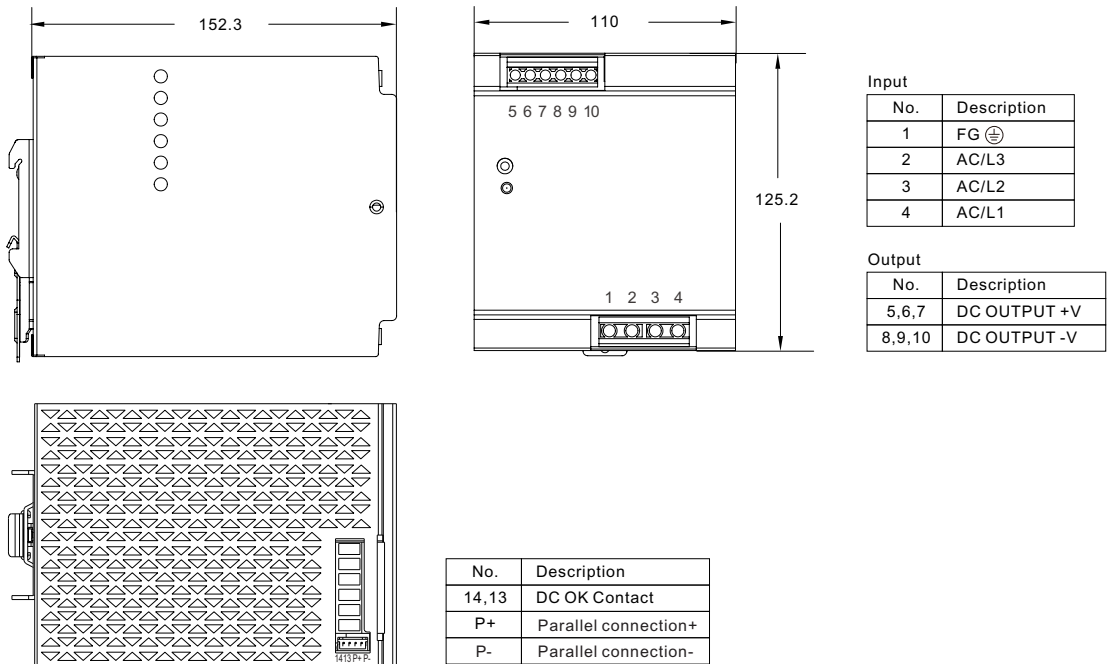

DPS-DIODE-20A redundancy module



Features

- Support 1+1 and 1+N redundancy system
- Suitable for redundancy operation of 12V/24V/48V systems
- 2 channels input and 1 output
- Built-in 2 channels DC OK signal and alarm relay contact
- Three Years Warranty

Specification


Product name	DPS-DIODE-20A-D12-02Z(H)	DPS-DIODE-20A-D24-02Z(H)	DPS-DIODE-20A-D48-02Z(H)
Input Parameter			
Input voltage range	9-14V	19-29V	36-60V
DC rated voltage	12V	24V	48V
Rated current	0~20A per input Continuous		
Efficiency	95%		
Input current	0~20A, Continuous		
Number of input	2 Channels		
Voltage drop(Vin-Vout) (max.)	0.25V		
Peak current	0~30A per input, 5Sec		
Input reverse current (max.)	1mA		
Input reverse voltage(max)	40Vdc		65Vdc
Connection mode	Terminal blocks		
Output Parameter			
Peak current (max.)	30A, 5Sec		
Rated current	0~20A per input Continuous		
Capacitance(Typ.)	320uF		
Standby power losses(Typ.)	1.5W		
Coefficient of temperature drift	±0.03%/°C(0~60°C)		
Connection mode	Terminal blocks		
Function			
Redundancy	For 1+1 redundancy ,and support 1+N redundancy		
Both inputs voltage alarm	<8.5V or >14.7V(±5%)	<18V or >31V(±5%)	<34.2V or >63V(±5%)
Relay	30Vdc/1A resistive load		
Led status display	Green LED OK		

DPS-DIODE-20A redundancy module



Product name	DPS-DIODE-20A-D12-02Z(H)	DPS-DIODE-20A-D24-02Z(H)	DPS-DIODE-20A-D48-02Z(H)
Mechanical Parameter			
Size (L X W X D)	125×32×100mm		
Weight	0.5kg		
Shell material	Metal		
DC light	OK		
Environmental Parameter			
Cooling	Free air convection		
Working temperature	-40 ~ +80 °C (Refer to "Derating Curve")		
Storage temperature	-40°C ~ + 85°C		
Storage humidity	5 ~95% RH non-condensing		
Working humidity	5 ~ 95% RH non-condensing		
Vibration test	Component: 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X,Y, Z axes; Mounting: Compliance to IEC61373		
Operational altitude	5000m/OVCII		
Security Parameter			
Overcurrent protection range	<30A,5Sec.No damage		
Short circuit protection	<30A,5Sec.No damage		
Safety standard	IEC62368-1		

Dimensional Drawing

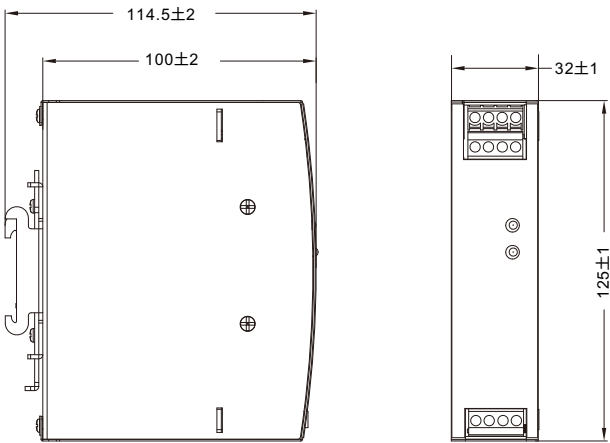



Features

- Support 1+1 and 1+N redundancy system
- Suitable for redundancy operation of 12V/24V/48V systems
- 2 channels input and 1 output
- Built-in 2 channels DC OK signal and alarm relay contact
- Three Years Warranty

Specification

Product name	DPS-DIODE-40A-D12-02Z(H)	DPS-DIODE-40A-D24-02Z(H)	DPS-DIODE-40A-D48-02Z(H)
Input Parameter			
Input voltage range	9-14V	19-29V	36-60V
DC rated voltage	12V	24V	48V
Rated current	0~40A per input Continuous		
Efficiency	95%		
Input current	0~40A, Continuous		
Number of input	2 Channels		
Voltage drop(Vin-Vout) (max.)	0.5V		
Peak current	0~60A per input, 5Sec		
Input reverse current (max.)	1mA		
Input reverse voltage(max)	40Vdc		65Vdc
Connection mode	Terminal blocks		
Output Parameter			
Peak current (max.)	60A, 5Sec		
Rated current	0~40A per input Continuous		
Capacitance(Typ.)	320uF		
Standby power losses(Typ.)	1.5W		
Coefficient of temperature drift	±0.03%/°C(0~60°C)		
Connection mode	Terminal blocks		
Function			
Redundancy	For 1+1 redundancy ,and support 1+N redundancy		
Both inputs voltage alarm	<8.5V or >14.7V(±5%)	<18V or >31V(±5%)	<34.2V or >63V(±5%)
Relay	30Vdc/1A resistive load		
Led status display	Green LED OK		

Product name	DPS-DIODE-40A-D12-02Z(H)	DPS-DIODE-40A-D24-02Z(H)	DPS-DIODE-40A-D48-02Z(H)
Mechanical Parameter			
Size (L X W X D)	125×55×101mm		
Weight	0.5kg		
Shell material	Metal		
DC light	OK		
Environmental Parameter			
Cooling	Free air convection		
Working temperature	-40 ~ +80 ℃ (Refer to "Derating Curve")		
Storage temperature	-40℃ ~ + 85℃		
Storage humidity	5 ~95% RH non-condensing		
Working humidity	5 ~ 95% RH non-condensing		
Vibration test	Component: 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X,Y, Z axes; Mounting: Compliance to IEC61373		
Operational altitude	5000m/OVCII		
Security Parameter			
Overcurrent protection range	<30A,5Sec.No damage		
Short circuit protection	<30A,5Sec.No damage		
Safety standard	IEC62368-1		

Dimensional Drawing

