

SSL


Product Catalogue



Q-FLEX

www.q-flex.fi info@q-flex.fi
+358 2 4894 500

- IP68 Mated (SSL1.2)
- Compact Design
- Indoor & Outdoor Solutions
- Wire to Wire, Board to Board, Wire to Board, Jumper, Receptacle
- UV Resistant (SSL 1.2)
- UL / cUL / CSA Certified

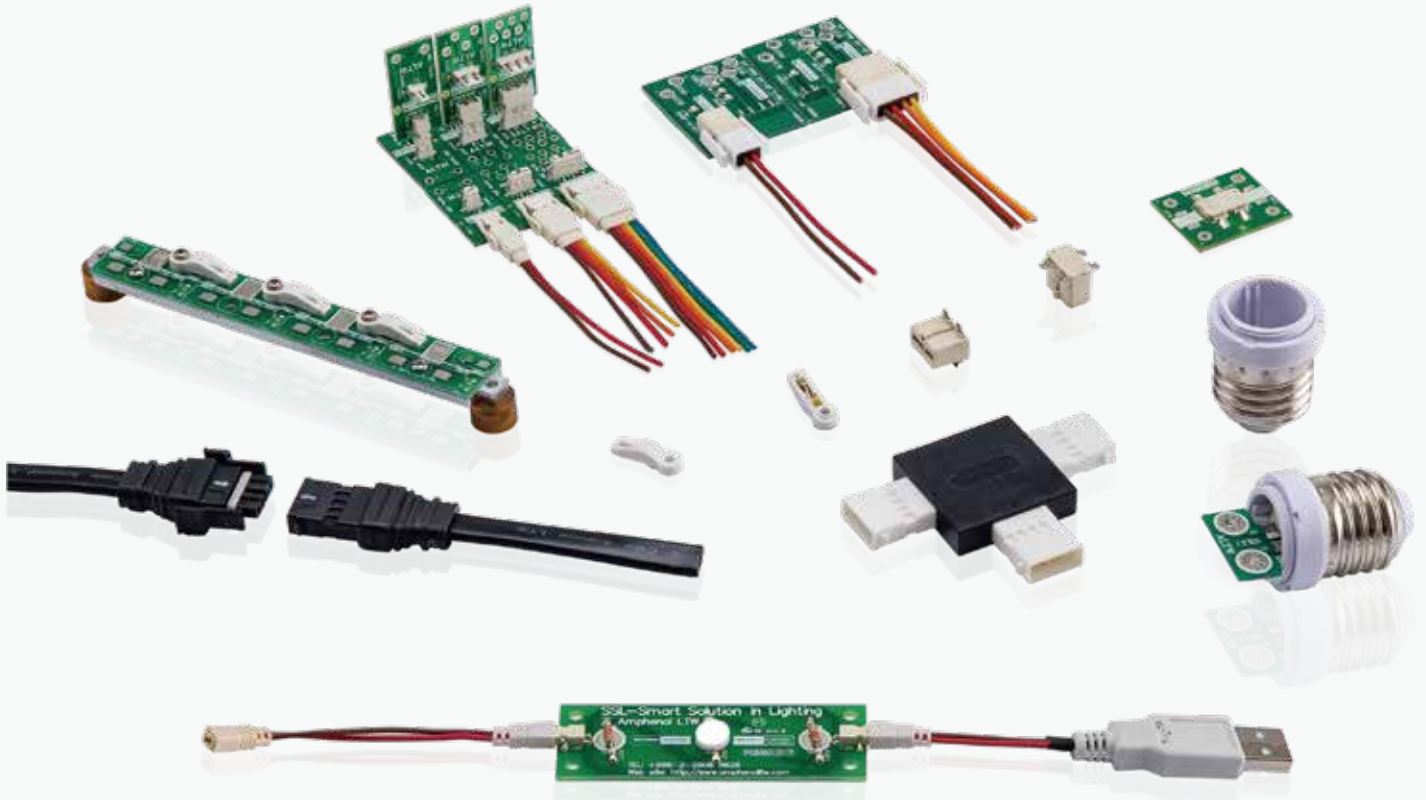

Contents

1	Product Selection Guide
11	Served Markets & Applications
15	Our Service
21	Markets / Applications
22	Product Range Overview
23	SSL 1.1
27	SSL 1.2
30	SSL 1.3
31	SSL 2.1
32	SSL 2.3
33	Assembly Instruction
34	Cable List
37	UL Style
43	FAQ and Lexicon



IP 68
(1m / 24h)



UV Resistant



UL 94-V0



Space Saving



UL



cUL



CSA C22.2

PRODUCT SELECTION GUIDE

Circular (Ceres, X-Lok, M)

	Mating Style						Materials	No. of Contacts	Contacts		Operating Voltage (AC/DC)	Nominal Current	Applicable Wires (AWG)	Mating Cycles (Pin Contact)	High Speed		Salt Spray (Connector Mated)
	2 Points Lock	3 Points Lock	Push Lock	Push Pull	Screw Thread	Others			Gold Plated	Silver Plated					Cat. 5e	Cat. 6A	
Ceres Series																	
Mini	•				•		B	2-6	•		250V	2A-5A	26-24	2,000			500h
Standard	•				•		B	2-12	•		250-600V	2A-10A 5A+2A 10A+5A	26-20	2,000			500h
Middle	•	•			•		P	2-18	•	•	250-600V	2A-20A 5A+2A 10A+2A 10A+5A	24-14	2,000			500h
Large	•				•		B	2-22	•	•	250-600V	2A-20A 20A+2A 20A+5A	26-16	2,000			500h
Macro	•						P	31	•		200V	5A	26	2,000			500h
PLD			•				P	2-4	•		250V	5A	26-20	2,000			500h
MAB	•						P	4	•		250V	10A	20	2,000			500h
GBD		•					P	8	•		250V	10A+5A	24-20	2,000			500h
X-LOK Series																	
Mini / LED			•				B	2-33	•		30-630V	0.5A-16A 5A-10A	32-14	1,000	•	•	500h
Standard			•				P	2-8	•		300-600V	10A+5A	26-16	1,000			500h
Middle			•				P	2-12	•	•	300-600V	5A-20A 10A+5A	26-12	1,000			500h
Large			•				B	2-100	•	•	60V (0.5A) 300-600V	0.5A-20A 20A+5A 50A	32-26	1,000			500h
Macro			•				P	4-31	•	•	300-600V	50A+5A	22-8	1,000			500h
M Series																	
M5					•		M	3-4	•		60V	1A	26	1,000			48h
Guided M8 / LED					•	Snap-in	B	2-6	•		30-60V	1.5A-3A 3A+1.5A	24-22	1,000			48h
M8 / LED					•	Snap-in	B	3-13	•		30-60V	0.5A-3A	32-22	1,000			48h
M10.5					•		M	2-5	•		30V	2A	24	1,000			48h
M12 A / LED			•	•			B	3-28	•		30-250V	0.5A-4A	30-22	1,000	•		48h
M12 B / LED			•	•			B	5	•		60V	4A	26-22	1,000			48h
M12 D / LED			•	•			B	4	•		250V	4A	26-22	1,000	•		48h
M12 I			•	•			B	5	•		60V	4A	22	1,000			48h
M12 K / LED			•	•			B	3-5	•		630V	12A, 16A	14	1,000			48h
M12 L / LED			•	•			B	2-5	•		63V	16A	14	1,000			48h
M12 M / LED			•	•			B	3-6	•		630V	8A	16	1,000			48h
M12 S			•	•			B	3-4	•		630V	12A	16	1,000			48h
M12 T			•	•			B	2-4	•		63V	12A	16	1,000			48h
M12 X			•	•			M	8	•		30-60V	0.5A	26	1,000		•	48h
M23					•		M	6	•		600V	28A	14-12	1,000			48h

Remarks:
Materials: P (Plastic), M (Metal), B (Both)
Assemble Style: R0 (Receptacle), RW (Receptacle With Wires), RP (Receptacle With Pigtail), RC (Receptacle With Overmolded Cable), OC (Overmolded With Cables), FI (Field Installable)
Vibration: (1) 10-500 Hz @Amplitude 0.35mm; (2) 10-55Hz @Amplitude 1.52mm
Operation Temperature & IP Rating: R0 (Receptacle), RW (Receptacle With Wires), OC (Overmolded With Cables), FI (Field Installable)

PRODUCT SELECTION GUIDE

(R0) Receptacle						(FI) Field Installable						UV	UL	Vibration	EMI	ROHS	Standard /	Certifications	Operating Temperature & IP Rating				
Solder	Crimp	SMT	PCB 180	PCB 90	RW	RC	Solder	Crimp	Screw In	Push In	IDC	OC	Resistant	94V-0		Option	2.0 & REACH			Compliant			
.			
.	UL1977	◦ RO: -40°C - 105°C, IP67 (Unmated)	
.	UL1977	◦ RW: -20°C - 85°C, IP67 (Unmated)	
.	UL1977	◦ OC: -20°C - 85°C, IP67 (Mated)	
.	UL1977	◦ FI: -40°C - 105°C, IP67 (Mated)	
.	
.	CSA, UL1977, UL2238, UL50e	◦ RO & RW: -40°C - 105°C, IP68 (Unmated) ◦ OC & FI: -40°C ~ 105°C, IP68 (Mated)
.	IEC 61076-2-105		
.			
.	IEC 61076-2-104	UL1977, UL2238	
.	94-HB			
.	IEC 61076-2-101	UL1977, UL2238, UL1863	
.	IEC 61076-2-101	UL1977, UL2238	
.	IEC 61076-2-101	UL1977, UL2238, UL1863	
.	94-HB		◦ RO: -40°C ~ 105°C, IP67 (Mated / Unmated), IP68 (Unmated), IP69K (Mated)	
.	IEC 61076-2-111	UL1977, UL2237	
.	IEC 61076-2-111	UL1977, UL2238	
.	IEC 61076-2-111	UL1977, UL2237	
.	IEC 61076-2-111	UL1977, UL2238	
.	IEC 61076-2-109	UL1863	
.		◦ RW: -20°C ~ 85°C, IP67 (Mated / Unmated), IP68 (Unmated), IP69K (Mated)	
.		◦ OC: -20°C ~ 85°C, IP67 / IP68 (Mated)	
.		◦ FI: -40°C ~ 105°C, IP67 / IP68 (Mated)	
.			
.			

PRODUCT SELECTION GUIDE

Circular (FLOS, Power, RBL, DeepTronica)

	Mating Style						Materials	No. of Contacts	Contacts		Operating Voltage (AC/DC)	Nominal Current	Applicable Wires (AWG)	Mating Cycles (Pin Contact)	Salt Spray (Connector Mated)
	2 Points Lock	3 Points Lock	Push Lock	Push Pull	Screw Thread	Others			Gold Plated	Silver Plated					
FLOS Series															
B				•			M	2-32	•		160-700V	1.5A-25A	28-16	5,000	144h
K				•			M	2-32	•		160-700V	1.5A-25A	28-16	5,000	144h
K (FLOS+)				•			M	2-32	•		160-700V	1.5A-25A	28-16	5,000	1000h
C				•			M	2-19	•		160-700V	1.5A-20A	28-16	3,000	144h
S				•			M	1	•		260-1000V	15A	28-16	3,000	144h
Y				•		Break Away	M	2-26	•		260-1000V	5A-14A	28-16	5,000	96h
P				•			P	2-14	•		200-400V	2A-10A	28-16	2,000	
N				•			M	2-19	•		200-800V	5A-22A	28-16	3,000	144h
Power Series															
PWE					•		P	5-7	•		277V	8A	20-17	500	500h
PWF					•		P	2-4	•		277V	12A	18-15	500	500h
PWG					•		P	4	•		277V	16A	18-14	500	500h
PWC	•	•					P	3	•		277V	20A	14-12	500	500h
PWCU	•	•					P	4 & 12	•		277V	20A+2A	14-12, 24-22	500	500h
PWH		•			•		P	3, 5	•		660V (AC) 1000V (DC)	25A	12	500	500h
PWL		•					P	3	•		300V	30A	14-8	500	500h
PWM		•					P	2	•		600V	50A	9-8	500	720h
PWMU		•					P	2+2, 2+4	•		600V	50A+2A	9-8, 22-20	500	720h
PWN		•					P	2	•		600V	70A	8-6	500	720h
PWNU		•					P	2+2, 2+4	•		600V	70A + 2A	8-6, 22-20	500	720h
PWP		•					P	2 & 3	•		600V	80A	4	500	720h
PWPD		•					P	2+2, 2+4, 3+2, 3+4	•		600V	80A+5A	4, 20	500	720h
PWX		•					P	9 (30A) 14 (30A+5A) 5 (50A) 12 (50A+5A) 4 (80A) 7 (80A+5A)	•		300-600V	30A, 30A+5A 50A, 50A+5A 80A, 80A+5A	22-20, 14-8, 9-8, 4	500	720h
RBL Series															
Middle			With Latch				P	2-9	•		300V	5A-10A 10A+5A	20-16	250	48h
Large			With Latch				P	2-18	•		300V	5A-20A 20A+5A	24-12	250	48h
DeepTronica															
Bathypelagic (4,000 m)				•			B								
Abyssopelagic (6,000 m)				•			B	1-27			200V-1000V	2A-50A	22-8	500-1,000	1000h
Hadopelagic (11,000 m)				•			B								

Remarks:
Materials: P (Plastic), M (Metal), B (Both)
Assemble Style: RO (Receptacle), RW (Receptacle With Wires), RP (Receptacle With Pigtail), RC (Receptacle With Overmolded Cable), OC (Overmolded With Cables), FI (Field Installable)
Vibration: (1) 10-500 Hz @Amplitude 0.35mm; (2) 10-55Hz @Amplitude 1.52mm
Operation Temperature & IP Rating: RO (Receptacle), RW (Receptacle With Wires), OC (Overmolded With Cables), FI (Field Installable)

PRODUCT SELECTION GUIDE

(R0) Receptacle					(FI) Field Installable					OC	UV Resistant	UL 94V-0	Vibration	EMI Option	ROHS 2.0 & REACH	Certifications	IP Rating	Operating Temperature
Solder	Crimp	Screw In	PCB 180	PCB 90	RW	Solder	Crimp	Screw In	Push In									
•			•	•		•	•				•		(2)	•	•		IP50 (Mated)	<ul style="list-style-type: none"> ◦ R0: -40°C - 125°C ◦ OC: -20°C - 85°C ◦ FI: -40°C - 125°C
•			•	•		•	•				•		(2)	•	•		IP68 (Mated)	
•			•	•		•	•				•		(2)	•	•		R0: IP68 (Unmated) OC: IP68 (Mated) FI: IP68 (Mated)	
•			•	•		•	•				•		(2)	•	•		IP68 (Mated)	
•			•	•		•	•				•		(2)	•	•		IP50 (Mated)	
•			•	•		•	•				•		(2)	•	•		IP68 (Mated)	
•			•	•		•	•				•	•	(2)	•	•		IP50 / IP66 (Mated) IP68 (Mated)	
•						•					•	94-HB	(2)	•	•	UL1977	IP67 / IP68	<ul style="list-style-type: none"> ◦ R0: -40°C - 105°C ◦ OC: -20°C ~ 80°C ◦ FI: -40°C ~ 105°C
•						•					•	94-HB	(2)	•	•	UL1977, TUV	IP67 / IP68	
		•						•			•	•	(2)	*	•	UL1977	IP67 / IP68	
•						•		•			•	•	(2)	•	•	UL1977, TUV	IP67 / IP68	
•	•	•					•	•			•	•	(2)	•	•	UL1977, UL6703A, TUV	IP67 / IP68	
		•				•		•			•	•	(2)	•	•	UL2238	IP67 / IP68	
•								•			•	•	(2)	•	•	UL1977	IP67 (Mated)	
•								•			•	•	(2)	•	•	UL1977	IP67 (Mated)	
•								•			•	•	(2)	•	•	UL1977	IP67 (Mated)	
	•						•				•	•	(2)	•	•	UL1977	IP67 (Mated)	
	•						•				•	•	(2)	•	•	UL1977	IP67 (Mated)	
		•					•				•	•		•	•	UL1977	IP69K (Mated)	
				•			•				•	•	(2)	•	•	UL1977		
				•			•				•	*	(2)	•	•		RW: IP68 (Unmated) OC: IP68 (Mated) FI: IP67 (Mated)	
				•			•				•	•		•	•			
				•			•				•	•		•	•		Deep Mating: 300 ~ 800 bar	
				•			•				•	•		•	•			

PRODUCT SELECTION GUIDE

Circular (HS-Lok, NMEA 2000, Mini, Heavy Duty Shielded)

	Mating Style						Materials	No. of Contacts	Contacts		Operating Voltage (AC/DC)	Nominal Current	Applicable Wires (AWG)	Mating Cycles (Pin Contact)	Salt Spray (Connector, Mated)
	2 Points Lock	3 Points Lock	Push Lock	Push Pull	Screw Thread	Others			Gold Plated	Silver Plated					
HS-Lok Series															
Q8				•			B	2-6	•		100V (DC), 300V, 300V (AC) + 100V (DC)	2A 5A 5A+2A	24-20	2,000	500h
NMEA 2000															
Lite (Micro)				•	•		B	5	•		60V	4A	16*1P+20*1P 18*1P+22*1P 22*1P+24*1P	Push Pull 500, Screw Thread 1,000	Metal: 48h Plastic: 1,000h
Heavy (Mini)					•		M	4-5	•		600V	8A	15*1P+18*1P 16*1P+18*1P	1,000	
7/8" Mini															
7/8" Mini					•		M	2, 2+PE, 4, 4+PE, 6	•		600V	8A-13A	16	1,000	48h
Heavy Duty Shielded															
Heavy Duty Shielded					*		M	2-14	•		50-300V	5A-40A	22-8	1,000	48h / 500h

Remarks:
Materials: P (Plastic), M (Metal), B (Both)
Assemble Style: R0 (Receptacle), RW (Receptacle With Wires), RP (Receptacle With Pigtail), RC (Receptacle With Overmolded Cable), OC (Overmolded With Cables), FI (Field Installable)
Vibration: (1) 10-500 Hz @Amplitude 0.35mm; (2) 10-55Hz @Amplitude 1.52mm
Operation Temperature & IP Rating: R0 (Receptacle), RW (Receptacle With Wires), OC (Overmolded With Cables), FI (Field Installable)

PRODUCT SELECTION GUIDE

(RO) Receptacle				(FI) Field Installable					OC	UV Resistant	UL 94V-0	Vibration	EMI Option	ROHS 2.0 & REACH	Certifications	IP Rating	Operating Temperature
Solder	PCB 180	PCB 90	RW	Solder	Crimp	Screw In	Push In	IDC									
•				•					•	•	(2)		•	UL2238, UL50e	RO: IP68 (Unmated) OC: IP68 (Mated) FI: IP68 (Mated)	◦ RO: -40°C - 105°C ◦ OC: -40°C - 105°C ◦ FI: -40°C - 105°C	
•	•		•	•		•	•		•		(1)	•	•	NMEA 2000	RO: IP68 (Unmated) RW: IP68 (Unmated) OC: IP68 (Mated)	◦ RO: -40°C - 105°C ◦ RW: -20°C - 85°C ◦ OC: -20°C - 85°C	
•	•					•	•		•	94-HB	(1)	•	•	NMEA 2000	FI: IP67 (Mated)	◦ FI: -40°C - 105°C	
•	•		•	•	•	•			•		(1)		•		RO: IP68 (Unmated) RW: IP68 (Unmated) OC: IP68 (Mated) FI: IP67 (Mated)	◦ RO: -40°C - 105°C ◦ OC: -40°C - 105°C ◦ FI: -40°C - 105°C	
•				•					•	•	94-HB	(1)	•		RO: IP68 (Unmated) OC: IP68 (Mated) FI: IP68 (Mated)	◦ RO: -40°C - 105°C ◦ RW: -20°C - 85°C ◦ OC: -20°C - 85°C ◦ FI: -40°C - 105°C	

PRODUCT SELECTION GUIDE

Other IO (RJ45, USB, D-Sub, SSL, HDMI, DVI)

	Mating Style			Materials	No. of Contacts	Gold Plated	Operating Voltage (AC/DC)	Nominal Current	Applicable Wires (AWG)	Mating Cycles (Pin Contact)	High Speed			
	2 Points Lock	3 Points Lock	Push Lock								Screw Thread	Others	Cat. 5e	Cat. 6A
RJ45 Series														
Middle		•		•	B	8		44-57V (DC)	Max. 1.5A	24	750	•	•	
Large / I-Adaptor	•	•		•	P	8		44-57V (DC)	Max. 1.5A	24	750	•		
ODVA	•				P	8		44-57V (DC)	Max. 1.5A	24	750	•		
Self-Closing Cover					P	8		44-57V (DC)	Max. 1.5A		750	•	•	
USB Series														
Mini USB Type B				•	P		•	30V	1.5A	28*1P + 28*3C	5,000			
Type A	•			•	B		•	30V	USB 2.0: 1.5A USB 3.2Gen1:	28*1P + 24*2C	1,500			
Type B	•			•	B		•	30V	USB 2.0: 1.5A	28*1P + 24*2C	1,500			
Micro USB Swift					M		•	30V (AC) 5V (DC)	1 & 5 Pin: 1.8A 2, 3 & 4 Pin: 1A		10,000			
Micro USB Swift-MU					P		•	30V (AC) 5V (DC)	1 & 5 Pin: 1.8A 2, 3 & 4 Pin: 1A	28	10,000			
Type C Swift-LP					M		•	30V (DC)	Up To 5A	32*1P + 24*1C + 28*1D	10,000			
Type C Swift-LA					P		•	30V (DC)	Up To 3A	32*1P + 24*1C + 28*1D	10,000			
Type C Swift-GG				•	B		•	30V (DC)	Up To 5A	32*1P + 24*1C + 28*1D	10,000			
Type C Swift-XL			•		P		•	30V (DC)	Up To 3A	32*1P + 24*1C + 28*1D	10,000			
D-SUB Series														
Standard				•	Automated Latch	M	9, 15, 25, 37, 50*	•	125V (DC)	5A	24	500		
High Density				•	Automated Latch	M	15, 26, 44, 62*, 78*	•	125V (DC)	2A	26	500		
SSL Series														
SSL1.1			•		P	2-6		•	100V	3A	22	100		
SSL1.2			•		P	2-4		•	250V	5A	22-18	30		
SSL1.3					P	1		•	500V	5A		10		
SSL2.1					P	2		•	600V	12A		20		
SSL2.3					P	2		•	500V	3A		100		
HDMI Series														
Circular				•		P	19	•	30V (AC)	0.5A	26	500		
Rectangular			•		With Latch	P	19	•	30V (AC)	0.5A	26	500		
Mini-HDMI				•		P	19	•	30V (AC)	0.5A	30	500		
DVI Series														
DDD					M	25		•	40V (AC)	1.5A	28	100		
DDS					M	19		•	40V (AC)	1.5A	28	100		
DID					M	29		•	40V (AC)	1.5A	28	100		
DIS					M	23		•	40V (AC)	1.5A	28	100		

Remarks:
Materials: P (Plastic), M (Metal), B (Both)
Assemble Style: RO (Receptacle), RW (Receptacle With Wires), RP (Receptacle With Pigtail), RC (Receptacle With Overmolded Cable), OC (Overmolded With Cables), FI (Field Installable)
Vibration: (1) 10-500 Hz @Amplitude 0.35mm; (2) 10-55Hz @Amplitude 1.52mm
Operation Temperature & IP Rating: RO (Receptacle), RW (Receptacle With Wires), OC (Overmolded With Cables), FI (Field Installable)

PRODUCT SELECTION GUIDE

High Speed			Salt Spray (Connector, Mated)	RO	RW	RP	OC	FI	UV Resistant	UL 94V-0	Vibration	EMI Option	ROHS 2.0 & REACH	Standard / Compliant / Certifications	Operating Temperature & IP Rating
USB 2.0	USB 3.2 Gen1	USB 3.2 Gen2													
			48h	PCB 90 & 180, Jack 90 & 180			•	•	•	•	(2)	•	•	TIA/EIA-568, IEC 60603-7	◦ RO : -40°C - 105°C, IP67 (Unmated)
			48h	PCB180, Jack 90 & 180			•	•	•	•	(2)	•	•	TIA/EIA-568, IEC 60603-7	◦ RP : -20°C - 85°C, IP67 (Unmated) ◦ OC : -20°C - 85°C, IP67P (Mated)
			48h	Jack 180			•	•	•	•	(2)	•	•	TIA/EIA-568, IEC 60603-7	◦ FI : -40°C - 105°C, IP67 (Mated)
			48h	•					•	•	(2)	•	•	TIA/EIA-568, IEC 60603-7	-40°C - 105°C, IP67 (Unmated)
•			48h	•	•					94V-HB	(2)	•	•		◦ RO : -40°C - 105°C, IP67 (Unmated)
•	•		48h	Type 1 & 2, Jack, PCB 180	•		•			•	(2)	•	•		◦ RW : -20°C - 85°C, IP67 (Unmated)
•			48h	Type 1 & 2, Jack, PCB 180	•		•			•	(2)	•	•		◦ OC : -20°C - 85°C, IP67P (Mated)
•			48h	•						•	(2)	•	•		◦ FI : -40°C - 105°C, IP67 (Mated)
•			48h				•			•	(2)	•	•		-30°C - 80°C, IP67/IP68 (Unmated)
•			48h							•	(2)	•	•		-40°C - 80°C, IP67 (Mated)
		•	48h	•						•	(2)	•	•		-40°C - 85°C, IP67 (Unmated)
•	•		48h	•			•			•	(2)	•	•		◦ RO : -40°C - 85°C, IP68 (Unmated)
	•	•	48h	•						•	(2)	•	•		◦ OC : -20°C - 85°C, IP67 (Mated)
	•		48h	•			•			•	(2)	•	•		◦ RO : -40°C - 85°C, IP67 (Unmated)
	•		48h	•						•	(2)	•	•		◦ OC : -20°C - 85°C, IP67 (Mated)
			8h	Solder, PCB 90& 180			•				(2)	•	•		◦ RO : -40°C - 105°C, IP68 (Unmated)
			8h	Solder, PCB 90& 180			•				(2)	•	•		◦ OC : -20°C - 85°C, IP67P (Mated)
															◦ FI : -40°C - 105°C, IP67 (Mated)
				•			•			•	(2)		•	CSA C22.2, UL1977	-40°C - 105°C, Non-IP
				•			•			•	(2)		•	CSA C22.2, UL1977, cUL UL2238+UL50e	-40°C - 105°C, IP68 (Mated)
				•						•	(2)		•	CSA, UL1977	-40°C - 105°C, Non-IP
				•						•	(2)		•	CSA, UL1977	-40°C - 105°C, Non-IP
				•						•	(2)		•		-40°C - 105°C, Non-IP
			48h	•			•			94V-HB	(2)	•	•		◦ RO : -20°C - 85°C, IP67 (Unmated)
			48h	•			•			94V-1	(2)	•	•		◦ OC : -20°C - 85°C, IP67P (Mated)
			48h	•			•			•	(2)	•	•		
			8h	•							(2)		•		
			8h	•							(2)		•		◦ RO : -40°C - 105°C, IP68 (Unmated)
			8h	•							(2)		•		◦ OC : -20°C - 85°C, IP67P (Mated)
			8h	•							(2)		•		

PRODUCT SELECTION GUIDE

Other IO (Fiber, ZConnect, RF)

	Mating Style			Materials	No. of Contacts	Gold Plated	Operating Voltage (AC/DC)	Nominal Current	Applicable Wires (AWG)	Mating Cycles (Pin Contact)	High Speed	
	2 Points Lock	3 Points Lock	Push Lock								Screw Thread	Others
Fiber Optic Series												
LC		•										
SC		•										
ZConnect Series												
FPC / FFC / WTB				Quick Plug	B	40, 36, 20, 18, 12	•	120V	1A		10	
RF Series												
SMA Type					M	1	•	335 Volts RMS At Sea Level		1.13mm, 1.32mm, 1.37mm, RG178	500	
N Type					M	1	•	1,000 Volts RMS At Sea Level		1.13mm, 1.32mm, 1.37mm, RG142, RG178, G58 A/U	500	

Other (Cable Joiner, Cable Gland, Protective Vent, LED)

	Mating Style		Materials	No. of Contacts	Contacts				Operating Voltage (AC/DC)	Nominal Current	Applicable Wires (AWG)	Salt Spray (Connector, Mated)	Receptacle
	Push Lock With Latch	Screw Thread			Gold Plated	Nickel Plated	Thermo plastic	SUS316L					
Cable Joiner Series													
M20		•	P	None, 4	•				10A	22-16			
M32	•		P	None, 4	•				15A-30A	16-10			
FICX I Tube (11)		•	P	2-5		•		450V (Non-UL) 600V (UL)	10A-30A	20-12			
FICX I Tube (12)		•	P	2-5		•		450V (Non-UL) 600V (UL)	8A-20A	18-12			
FICX XI Tube (13)		•	P	2-5		•		450V (Non-UL) 600V (UL)	8A-20A	18-12			
FICX T Tube (T2)		•	P	2-5		•		450V (Non-UL) 600V (UL)	10A-20A	20-12			
Cable Gland Series													
Cable Gland		•	B									•	
Protective Vent													
M6 Plastic		•	P								1,000h	•	
M12 Snap-in		•	P								1,000h	•	
M12 Stainless		•	M				•				1,000h	•	
M12 Plastic		•	P				•				1,000h	•	
M12 Metal		•	M			•					48h	•	
LED Light Guide													
Ø3mm			B				•	4V				•	
Ø5mm			M				•	4V				•	

Remarks:
Materials: P (Plastic), M (Metal), B (Both)
Assemble Style: R0 (Receptacle), RW (Receptacle With Wires), RP (Receptacle With Pigtail), RC (Receptacle With Overmolded Cable), OC (Overmolded With Cables), FI (Field Installable)
Vibration: (1) 10-500 Hz @Amplitude 0.35mm; (2) 10-55Hz @Amplitude 1.52mm
Operation Temperature & IP Rating: R0 (Receptacle), RW (Receptacle With Wires), OC (Overmolded With Cables), FI (Field Installable)

PRODUCT SELECTION GUIDE

USB 2.0	High Speed		Salt Spray (Connector, Mated)	RO	RW	RP	OC	FI	UV Resistant	UL 94V-0	Vibration	EMI Option	ROHS 2.0 & REACH	Standard / Compliant / Certifications	Operating Temperature & IP Rating
	USB 3.2 Gen1	USB 3.2 Gen2													
			48h	•				•	•						-40°C - 105°C, IP67 (Mated)
			48h	•				•	•						-40°C - 105°C, IP67 (Mated)
			48h						•				•		-40°C - 110°C, Non-IP
			48h	•								•	•	MIL-C-39012	-40°C - 105°C, IP68 (Unmated)
			48h	•								•	•	MIL-C-39012	-40°C - 105°C, IP68 (Unmated)

Field Installable	UV Resistant	UL 94V-0	Vibration	ROHS 2.0 & REACH	Certifications	IP Rating	Operating Temperature
•	•	94V-2		•		IP67	-40°C - 105°C
•	•	•		•	UL6703A	IP67	-40°C - 105°C
•	•	•		•	CSA, UL2238, UL50e	IP68 (Mated)	-40°C - 105°C
•	•	•		•	CSA, UL2238, UL50e	IP68 (Mated)	-40°C - 105°C
•	•	•		•	CSA, UL2238, UL50e	IP68 (Mated)	-40°C - 105°C
•	•	•		•	CSA, UL2238, UL50e	IP68 (Mated)	-40°C - 105°C
•		94V-0 94V-2	(2)	•		IP67 (Mated) IP68 (Mated)	• RO: -20°C - 105°C • FI: -20°C - 105°C
	•	•		•		IP66, IP68	-40°C - 125°C
	•	•		•		IP68, IP69K	-40°C - 125°C
	•	•		•		IP68, IP69K	-40°C - 125°C
	•	•		•		IP68, IP69K	-40°C - 125°C
	•	•		•		IP68, IP69K	-40°C - 125°C
						IP67	• Red & Green: -30°C - 80°C • Others: -40°C - 80°C
						IP67	• Red & Green: -30°C - 80°C • Others: -40°C - 80°C

Served Markets & Applications

Applications	Ceres	X-Lok	M series	FLOS & FLOS+	Power	RBL	Deep Tronica	HS-Lok	NMEA 2000	7/8" Mini	Heavy Duty Shielded	RJ45	USB	SSL	HDMI	DVI	Fiber Optics	Zconnect	RF	Cable Joiner	Cable Gland	Vent	LED Light Guide	D-Sub
LED Lighting																								
Architectural Lighting	•	•	•		•	•		•		•		•		•				•		•	•	•		
Outdoor LED Displays	•	•	•	•	•	•				•		•		•				•		•	•	•		
Outdoor Signage	•	•			•	•				•		•		•				•		•	•	•		
Entertainment Lighting & Systems	•	•			•	•		•		•		•		•				•		•	•	•		
Smart City, Street Lighting	•	•			•	•				•		•		•				•		•	•	•		
Tunnel Lighting	•	•	•		•	•				•		•		•				•		•	•	•		
Parking Lighting	•	•			•	•		•		•		•		•				•		•	•	•		
Cruise & Shipyards Lighting	•	•	•		•	•		•	•	•		•		•				•		•	•	•		
High Speed Train & EV Bus	•	•			•	•		•		•	•		•					•		•	•	•		
Commercial Lighting	•	•	•		•	•		•		•		•		•				•		•	•	•		
Refrigeration Lighting	•	•	•		•	•		•		•		•		•				•		•	•	•		
Horticulture Lighting	•	•	•		•	•				•		•		•				•		•	•	•		
Warehouse Lighting	•	•			•	•				•		•		•				•		•	•	•		
Emergency Lighting	•	•	•		•	•		•		•		•		•				•		•	•	•		
UV and Sanitary Lighting	•	•	•		•	•		•		•		•		•				•		•	•	•		
Li-Fi	•	•			•	•				•		•		•				•	•	•	•	•		
Hospital Surgical Lighting & Room	•	•	•		•	•		•		•		•		•				•		•	•	•		
ATEX Lighting	•	•			•	•		•						•				•		•	•	•		
Underwater / Submerged Lighting	•	•			•	•								•				•					•	
Marine																								
Multi-Function Display	•	•	•	•	•	•			•	•	•	•	•		•	•		•	•			•	•	•
Outboard Motors	•	•	•		•	•			•	•	•	•	•					•			•			
Bilge Pump	•	•	•		•	•			•	•	•	•	•					•			•			
Heater	•	•	•		•	•		•	•	•	•	•	•					•		•	•	•		
HVAC (Heating Ventilation Air Conditioning)	•	•	•		•	•		•	•	•	•	•	•					•		•	•	•		
Fridge	•	•	•		•	•		•	•	•	•	•	•					•			•			
Docking System	•	•	•		•	•	•		•	•	•	•	•					•			•			
Windlass	•	•	•		•	•			•	•	•	•	•					•			•			
Sensors	•	•	•		•	•			•	•	•	•	•					•			•			
RADAR	•	•	•		•	•		•	•	•	•	•	•					•	•					
Antenna	•	•	•		•	•		•	•	•	•	•	•					•	•					
USB Charger	•	•	•		•	•		•	•	•	•	•	•					•		•				
Audio System	•	•	•		•	•		•	•	•	•	•	•					•		•	•	•		
Lighting System	•	•	•		•	•		•	•	•	•	•	•	•				•		•	•	•		•
CCTV	•	•	•		•	•		•	•	•	•	•	•					•			•			
Power Controller	•	•	•		•	•			•	•	•	•	•					•		•	•	•		•
Autopilot System	•	•	•		•	•			•	•	•	•	•					•		•	•	•		•
Automatic Identification System	•	•	•		•	•		•	•	•	•	•	•					•		•	•	•		•
GPS, Beacon & Lifebuoy	•	•	•		•	•		•	•	•	•	•	•					•		•	•	•		
Sonar / Transducer	•	•	•		•	•			•	•	•	•	•					•			•			
Fish-Finders	•	•	•		•	•			•	•	•	•	•					•			•			
Chartplotter	•	•	•		•	•			•	•	•	•	•					•			•			•
Sailing Instruments	•	•	•		•	•			•	•	•	•	•					•			•			•
Shipyards & Cruise	•	•	•		•	•			•	•	•	•	•					•			•			•
Drilling Systems							•																	
Seaport							•																	
Submarine							•																	
ROVs							•																	
Marine Renewable Energy							•																	
ROTV							•																	
Buoys							•																	
Underwater Vehicles							•																	
Underwater Equipment							•																	
Diving							•																	
Broadband Wireless Access																								
General Small Cells	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
RRH (Remote Radio Head)	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Wireless Mobile Backhaul	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
High Capacity Mobile Subscriber Unit	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Outdoor Base Station Unit	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Outdoor LTE	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Outdoor AP	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Subscriber Station	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Outdoor Wireless Mesh Router	•	•	•		•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Base Station Power Supply	•	•		•	•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•
Communication System																		•						
Outdoor Wireless Mesh Router	•	•			•	•		•	•	•	•	•	•				•	•	•	•	•	•	•	•

Served Markets & Applications

Applications	Ceres	X-Lok	M series	FLOS & FLOS+	Power	RBL	Deep Tronica	HS-Lok	NMEA 2000	7/8" Mini	Heavy Duty Shielded	RJ45	USB	SSL	HDMI	DVI	Fiber Optics	Zconnect	RF	Cable Joinder	Cable Gland	Vent	LED Light Guide	D-Sub	
Industrial Automation																									
Robotic Arm			•	•				•		•	•							•							
Industrial Server / Network	•	•	•	•	•			•		•	•	•	•		•	•	•	•	•			•	•	•	•
Industrial Forklifts (Truck)	•	•	•	•	•	•		•		•	•	•	•		•	•					•	•		•	•
AVI (Automatic visual inspection)	•	•	•	•	•			•		•	•								•						
Data Communication System	•	•	•	•				•		•	•	•	•		•	•			•	•			•	•	•
Industrial Control Center	•	•	•	•	•			•		•	•	•	•		•	•						•	•	•	•
Packaging Center	•	•	•	•				•		•	•								•						
Conveyors	•	•	•	•				•		•	•								•						
Sensors			•							•	•								•						
Power Distribution	•	•	•	•		•				•	•								•						
Actuators	•	•	•							•	•								•						
Motor Drives	•	•	•			•	•			•	•								•						
Industrial PC & Displays	•	•	•	•	•			•		•	•	•	•		•	•			•	•			•	•	•
Machine Tools	•	•	•	•	•					•	•								•						
Switches		•	•							•	•	•	•						•						•
Production Equipment	•	•	•	•	•	•				•	•	•	•						•				•	•	•
Renewable Energy																									
PV / DC Inverter	•	•	•			•	•			•	•	•							•		•	•	•	•	•
Micro Inverter			•							•	•								•		•	•	•	•	•
CSP & CPV	•	•	•			•	•			•	•								•		•	•	•	•	•
Heliostat	•	•	•			•	•			•	•								•		•	•	•	•	•
PV Trackers	•	•	•			•	•			•	•								•		•	•	•	•	•
PV ICS (Integrated Control Systems)			•			•	•			•	•	•							•		•		•	•	•
Portable Energy	•	•	•			•	•		•	•	•	•	•						•		•	•	•	•	•
Communication System	•	•	•	•	•	•	•			•	•	•	•		•	•	•		•	•		•	•	•	•
PDC (Power Distribution Control)	•	•	•	•	•	•	•			•	•	•	•						•	•		•	•	•	•
Wind Turbine	•	•	•	•	•	•	•			•	•	•	•						•		•	•	•	•	•
Energy Storage System	•	•	•	•	•	•	•			•	•	•	•						•		•	•	•	•	•
Tidal Power Generation System	•	•	•	•	•	•	•			•	•	•	•						•		•	•	•	•	•
Heavy Equipment																									
Electronic Toll System	•	•	•	•	•	•	•		•	•	•	•	•		•	•			•	•		•	•	•	•
Automotive Diagnostics	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•			•	•		•	•	•	•
Agriculture Electronic Equipment	•	•	•	•	•	•	•		•	•	•	•	•		•	•			•	•		•	•	•	•
Lidar & Radar	•	•	•	•						•	•	•	•		•	•			•						
ADAS (Advanced Driver Assistance Systems)	•	•	•	•	•	•	•		•	•	•	•	•		•	•			•	•		•	•	•	•
Telematics & Tracking	•	•	•			•	•			•	•	•	•		•	•			•	•	•	•	•	•	•
Camera & Monitoring	•	•	•	•	•	•	•			•	•	•	•		•	•			•	•		•	•	•	•
Control System	•	•	•	•	•	•	•			•	•	•	•		•	•			•	•		•	•	•	•
Display	•	•	•	•	•	•	•			•	•	•	•		•	•			•	•		•	•	•	•
GPS System	•	•	•	•	•	•	•			•	•	•	•						•	•		•	•	•	•
Lighting	•	•	•			•	•			•	•			•					•		•				
Measurement Systems	•	•	•	•	•	•	•			•	•	•	•		•	•			•	•		•	•	•	•
Sensors		•	•	•	•					•	•								•						
Automated Meter Reading																									
Water Meter	•	•	•	•				•				•	•						•	•		•	•	•	•
Electricity Meter	•	•	•	•				•				•	•						•	•		•	•	•	•
Gas Meter	•	•	•	•				•				•	•						•	•		•	•	•	•
Alarm System	•	•	•	•				•				•	•						•	•		•	•	•	•
Military Drone	•	•	•	•				•				•	•						•	•		•	•	•	•
Vehicle Tracking	•	•	•	•				•				•	•						•	•		•	•	•	•
Telemetry	•	•	•	•				•				•	•						•	•		•	•	•	•
Sewage	•	•	•	•	•	•	•			•	•	•	•						•	•		•	•	•	•
Rugged IT																									
Telemetry		•	•	•				•				•	•						•	•		•	•	•	•
Rugged & Military VR and AR		•	•	•				•				•	•						•	•		•	•	•	•
Rugged Notebook				•								•	•		•	•			•	•					•
Night Vision Goggle			•	•				•				•	•						•	•					
Miniature Camera												•	•						•	•					
Rugged Tablet												•	•		•	•			•	•					
Communication Devices				•								•	•		•	•			•	•				•	•

Served Markets & Applications

Applications	Ceres	X-Lok	M series	FLOS & FLOS+	Power	RBL	Deep Tronica	HS-Lok	NMEA 2000	7/8" Mini	Heavy Duty Shielded	RJ45	USB	SSL	HDMI	DVI	Fiber Optics	Zconnect	RF	Cable Joiner	Cable Gland	Vent	LED Light Guide	D-Sub
Test Equipments																								
Air Flow Measurement	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Gas Detectors	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Precision Surveying	•	•	•	•	•	•		•		•	•	•	•		•	•		•	•			•		•
Earthquake Monitoring	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Humidity Measurement	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Leak Detectors	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Light Measuring	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Sound Measuring	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Water Measurement	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Weighing Devices	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Weigh Modules	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Heavy-duty Scales	•	•	•	•	•	•		•		•	•	•	•					•	•			•		•
Floor Scales	•	•	•	•	•	•		•		•	•	•	•					•	•			•		•
Wet Area Weighing	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Dosing Systems	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
In-Motion Weighing	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Borescope	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Image Measurement	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Timers / Timer Display	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Laser Marking System	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Digital Microscopes	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Hybrid Electric Vehicles																								
Electric Wheelchair	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Electrical and Electronic Speed Control	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Electrical and Electronic Brake System	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Throttle Controller	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Battery Module	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Motor Module	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Gear Shift Module	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Controller Unit	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Charge Plug / Inlet	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Charging Station	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Home Charge Platform	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Hoverboard	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Electric Scooter	•	•	•	•	•	•		•		•	•	•	•					•	•			•		
Railway Mass Transit																								
Infotainment Systems	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
In-Vehicle Information System	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Indication Display	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Navigation/GPS	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
HVAC (Heating Ventilation Air Conditioning)	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Fuel Leakage Detector	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Broadcasting System	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Vehicle Monitoring	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Cleaning Control	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Speedometer	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Interior Lighting	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Mobile Devices																								
DRC (Drone Remote Controller)	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Altimeter	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Barcode Reader	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
GPS Safety Guard	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Portable Lamp	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Gesture Measurement	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•
Wearables	•	•	•	•	•	•		•		•	•	•	•					•	•			•	•	•

Served Markets & Applications

Applications	Ceres	X-Lok	M series	FLOS & FLOS+	Power	RBL	Deep Tronica	HS-Lok	NMEA 2000	7/8" Mini	Heavy Duty Shielded	RJ45	USB	SSL	HDMI	DVI	Fiber Optics	Zconnect	RF	Cable Joiner	Cable Gland	Vent	LED Light Guide	D-Sub	
Transportation																									
Vehicle Camera	•	•	•	•		•		•					•		•			•			•	•			
Switch			•									•	•					•							•
Dome Vehicle Camera	•	•	•			•												•				•	•		
RFID Reader																		•	•						
Bus GPS	•	•	•	•		•		•				•	•		•	•		•	•						
Displayer	•	•	•	•		•												•							
Outdoor Speaker	•	•	•	•		•												•							
Automotive Winches																		•							
Vehicle Charger	•	•	•			•												•							
Wifi Router												•						•							
Fleet Management	•	•	•	•		•												•							
Digital Video Surveillance System	•	•	•	•	•	•				•	•	•						•						•	
Medical Equipment																									
Medical Displays				•	•							•	•		•	•		•				•			•
Mobile Nursing Carts	•	•			•	•		•		•	•				•	•		•			•	•			•
Non-invasive Devices	•	•		•	•	•		•		•	•	•	•		•	•		•			•	•			•
Electrical Beds	•	•	•		•	•				•	•				•	•		•			•	•			•
Charges	•	•			•	•				•	•				•	•		•			•	•			•
Wheelchair Lift	•	•			•	•				•	•				•	•		•			•	•			•
Wheelchair Stair Lift	•	•			•	•				•	•				•	•		•			•	•			•
Rehabilitation System	•	•			•	•				•	•				•	•		•			•	•			•
Automotive Diagnostics																									
Auto Crash Notification	•	•	•	•	•	•		•		•	•	•	•		•	•		•	•						•
Vehicle Tracking	•	•	•		•	•		•		•	•		•		•	•		•	•			•			•
Vehicle Health Alert & Roadside Assistance	•	•	•	•	•	•		•		•	•	•	•		•	•		•	•						•
Remote Vehicle Diagnostics	•	•	•	•	•	•		•		•	•	•	•	•	•	•		•	•			•	•		•
UAV																									
Commercial Drone	•	•	•	•	•	•		•		•	•	•	•		•	•		•	•		•	•		•	•
Military Drone	•	•	•	•	•	•		•		•	•	•	•		•	•		•	•		•	•		•	•
Consumer Drone	•	•	•	•	•	•		•		•	•	•	•		•	•		•	•		•	•		•	•
Lifts & Materials Handling																									
Forklift	•	•	•	•	•	•		•		•	•	•	•		•	•		•			•	•		•	•
Industrial Lift	•	•	•	•	•	•		•		•	•	•	•		•	•		•			•	•		•	•
Materials Handling	•	•	•	•	•	•		•		•	•	•	•		•	•		•			•	•		•	•
Remote Video Response Center																									
Encoders	•	•	•	•	•			•		•	•	•	•		•	•		•	•			•	•		•
Monitoring Station	•	•	•		•	•				•	•	•	•		•	•		•			•				•
CCTV/Dome/IP Camera	•	•	•	•	•			•		•	•	•	•		•	•		•	•		•	•		•	•
Remote Control	•	•			•			•				•	•		•	•		•			•				•
Junction Box	•	•			•							•	•		•	•		•			•	•			•
Automatic LPRS (License Plate Recognition System)	•	•	•	•	•			•		•	•	•	•		•	•		•	•		•	•		•	•
Fingerprint ID												•						•							
Alarm System	•	•	•	•	•			•				•	•		•	•		•	•		•	•		•	•
Sensor			•															•							
Autonomous																									
GPS	•	•	•	•				•		•	•	•	•		•	•		•	•						
Lidar	•	•	•	•				•		•	•	•	•		•	•		•			•	•			
Radar Sensors	•	•	•	•				•		•	•				•	•		•	•						
Video Cameras	•	•	•	•				•		•	•		•		•	•		•			•	•			
Central Computer	•	•	•	•				•		•	•	•	•		•	•		•							
Inertial Measurement Unit	•	•	•	•				•		•	•				•	•		•							
Inertial Navigation Systems	•	•	•	•				•		•	•				•	•		•	•						
Commercial Military																									
Commercial Military				•														•							



LED

- Li-Fi
- Outdoor LED Displays
- Outdoor Signage
- Parking Lighting
- Refrigeration Lighting
- Smart Street Lights
- Architectural Lighting
- ATEX Lighting
- Commercial Lighting
- Cruise & Shipyards Lighting
- Emergency Lighting
- Horticulture Lighting
- Tunnel Lighting
- Underwater / Submerged Lighting
- UV and Sanitary Lighting
- Warehouse Lighting
- Entertainment Lighting & Systems
- Hospital Surgical Lighting & Room
- Train, Bus, Plane & Recreational Vehicles Lighting



Hybrid Electric Vehicles

- Battery Module
- Charge Plug / Inlet
- Charging Station
- Controller Unit
- Gear Shift Module
- Home Charge Platform
- Hoverboard
- Motor Module



Heavy Equipment

- Automotive Diagnostics
- Lighting



Railway Mass Transit

- Interior Lighting



Automotive Diagnostics

- Remote Vehicle Diagnostics


Product Range Overview

Sub-Series Name	SSL1.1	SSL1.2	SSL1.3	SSL2.1	SSL2.3
Mating Style	Push Lock With Latch	Push Lock With Latch	-	-	-
Plastic Version	✓	✓	✓	✓	✓
No. of Contacts	2 ~ 6	2 ~ 4	1	2	2
Plating of Contacts	Gold Plated	Gold Plated	Gold Plated	Gold Plated	Gold Plated
Operating Voltage (AC/DC)	100V	Wire: 250V Flat Cable: 300V	500V	600V	500V
Nominal Current	3A	5A	5A	12A	3A
Operating Temperature	Receptacle: -40°C ~ 105°C Wire Assembly: -40°C ~ 100°C Overmolded With Cable: -40°C ~ 105°C				
Receptacle	✓	✓	✓	✓	-
Overmolded Cable	✓	✓	-	-	-
Field Serviceable/Installable	-	✓	-	-	-
Accessories	✓	✓	-	-	-
Applicable Wire Gauge	22AWG (0.34mm ²)	22AWG ~ 18AWG (0.34 ~ 0.75mm ²)	-	-	-
Mating Cycles (Pin Contact)	100 Cycles	Wire: 30 Cycles Flat Cable: 100 Cycles	10 Cycles	20 Cycles	100 Cycles
IP Rating	Non-waterproof	IP68 (Mated, 1M / 24h)	Non-waterproof	Non-waterproof	Non-waterproof
Salt Spray (Connector, Mated)	24h	24h	24h	24h	24h
UV Resistant	-	✓	-	-	-
Flammability	UL94V-0	UL94V-0	UL94V-0	UL94V-0	UL94V-0
Vibration Resistant	Frequency Range 10 ~ 55Hz / Amplitude 1.52mm				
ROHS 2.0 Compliant	✓	✓	✓	✓	✓
REACH Compliant	✓	✓	✓	✓	✓
Certifications	CSA C22.2, UL1977	CSA C22.2, UL1977, cUL UL2238 + UL50e	CSA, UL1977	CSA, UL1977	-


PCB Layout

PCB SMT Mount > Right Angle (Horizontal Mounting)


Jack
>> 2P





Plug




Recommended PCB Layout

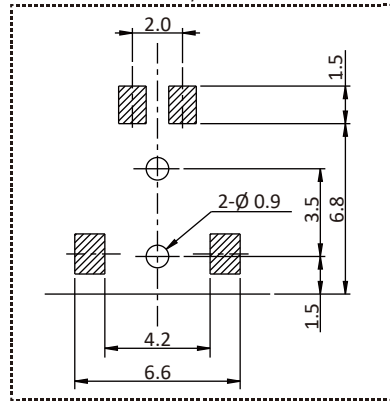



>> 4P

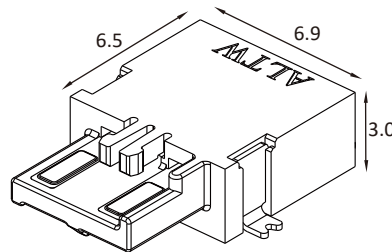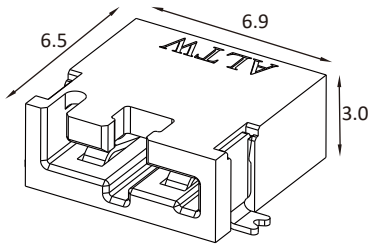


Recommended PCB Layout

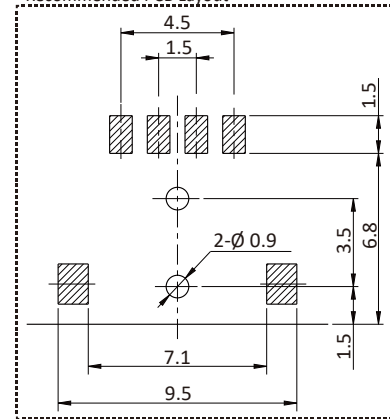

>> 6P

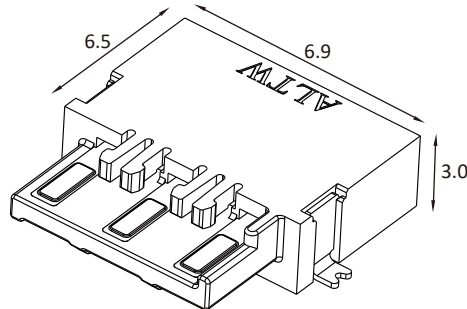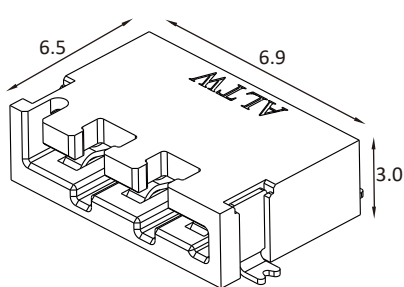

Recommended PCB Layout

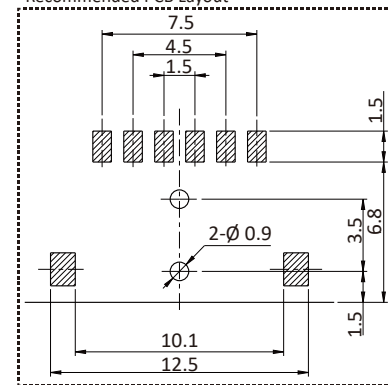


(Unit: mm)


PCB Mount > Straight (Vertical Mounting)

Plug


>> 2P




Recommended PCB Layout

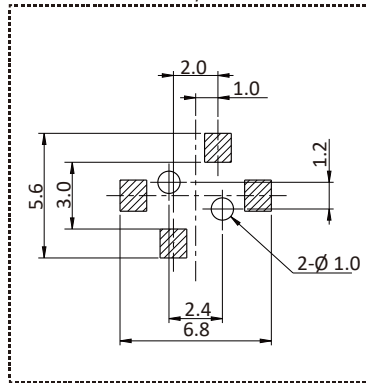


Jack





Recommended PCB Layout

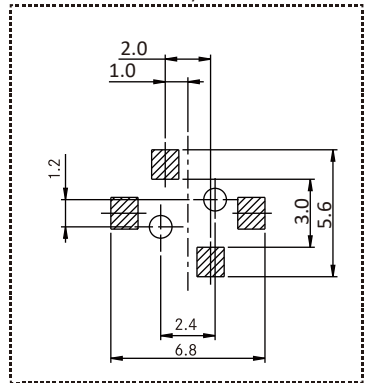


>> 4P




Recommended PCB Layout

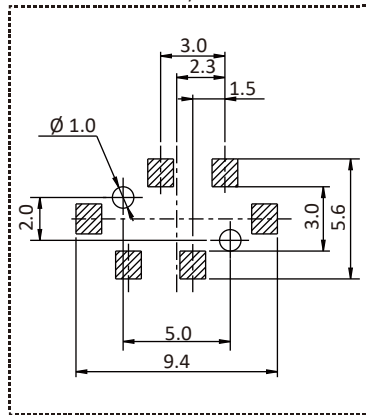



Recommended PCB Layout

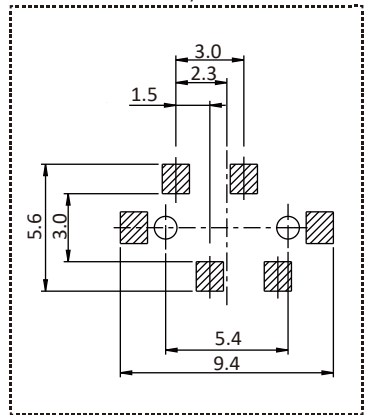


>> 6P



Recommended PCB Layout

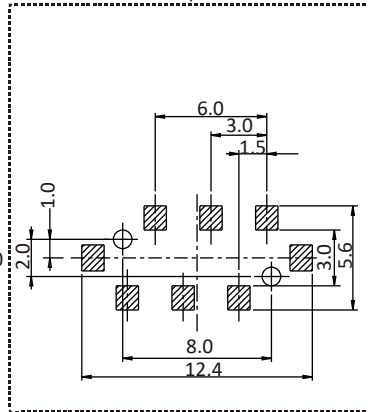



Recommended PCB Layout

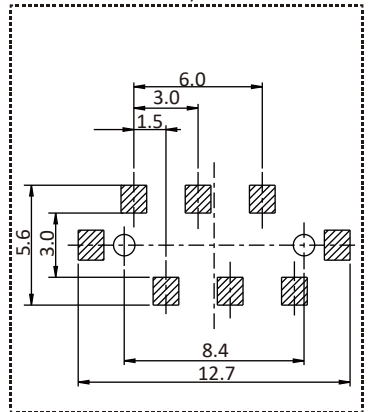



Wire Assembly

Jack



>> 2P



>> 4P



>> 6P




(Unit: mm)


SSL 1.1 - Plastic Jack / Plug

Plug


>> 2P





>> 4P





>> 6P



Packing Information

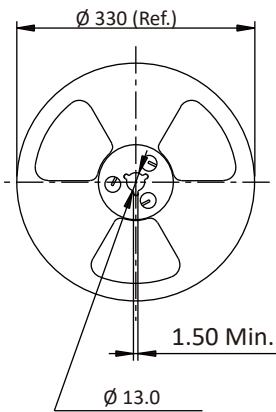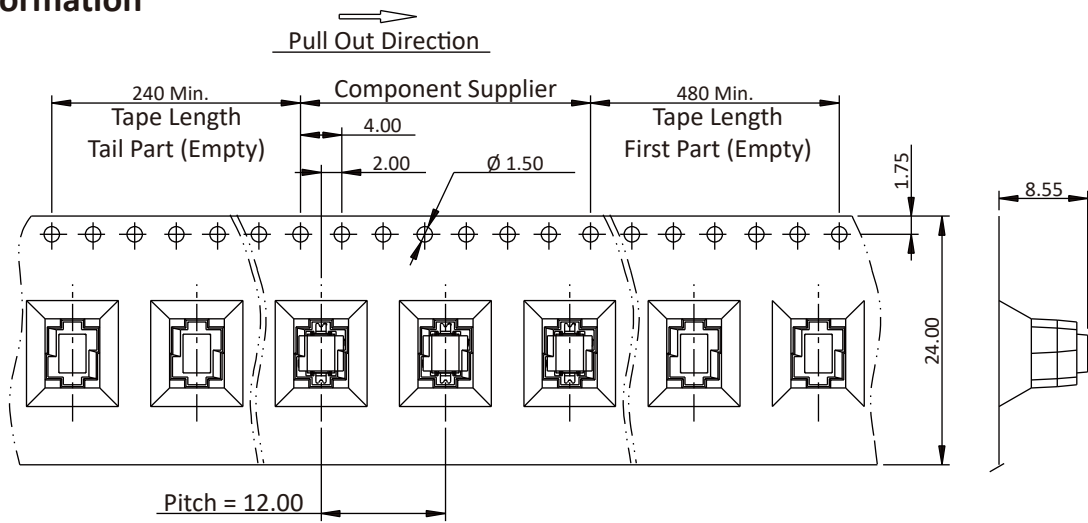


Reel For Carrier Tape

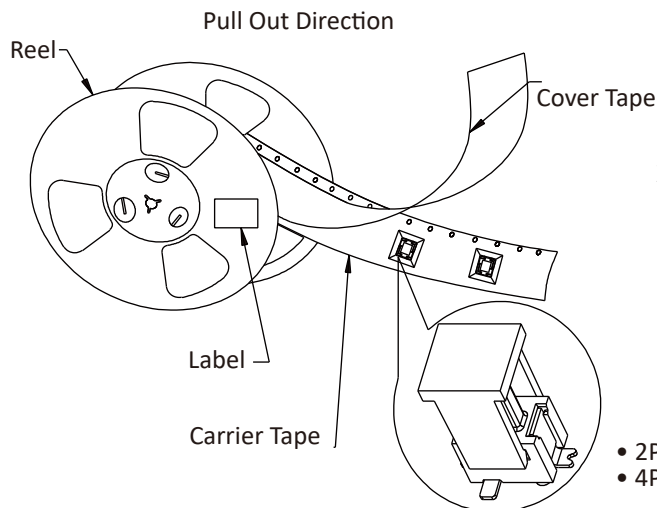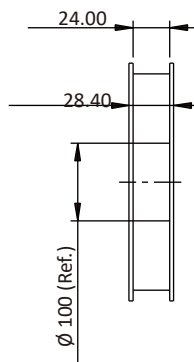

X 8 Reels

- 2P: 500 Pcs / Reel
- 4P & 6P: 400 Pcs / Reel

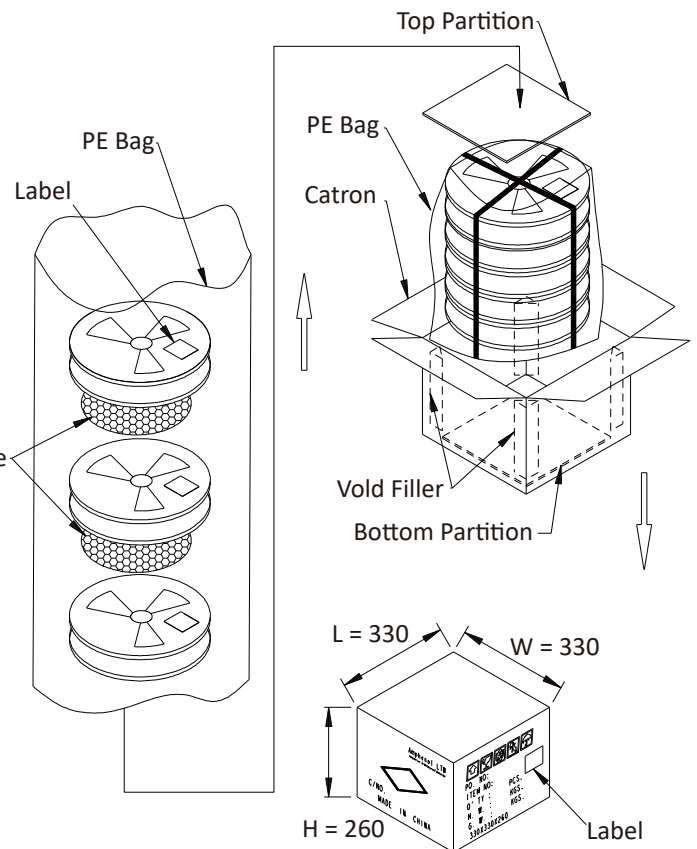

(Unit: mm)

SSL 1.1 - Plastic Jack / Plug

No of Contacts	2	4	6
Rated Voltage (AC/DC)	100V		
Nominal Current	3A		
Plastic / Metal	Plastic		

SMT Board, **STRAIGHT** (Contact Gender: Plug)
Wires Assembly Options: For PCB Mount Type | Without Lock, Non-Waterproof

SMT Board Straight With Post	SSL11-P02A00-000001	SSL11-P04A00-000001	SSL11-P06A00-000001
------------------------------	---------------------	---------------------	---------------------

SMT Board, **RIGHT ANGLE** (Contact Gender: Plug)
Wires Assembly Options: For PCB Mount Type | Without Lock, Non-Waterproof

SMT Board Right Angle With Post	SSL11-P02C00-000001	SSL11-P04C00-000001	SSL11-P06C00-000001
---------------------------------	---------------------	---------------------	---------------------

SMT Board Right Angle Without Post	SSL11-P02D00-000001	SSL11-P04D00-000001	SSL11-P06D00-000001
------------------------------------	---------------------	---------------------	---------------------

STRAIGHT, Overmolded With Wires Single Ended (Contact Gender: Plug, With Strain Relief)
⑩ Wire/Cable Length: (01) 100mm ~ (99) 9,900mm¹⁾

UL1430, XL-PVC, No Lock (End 1: Plug, End 2: Open)	SSL11-P02LP0-022A⑩	SSL11-P04LP0-022A⑩	SSL11-P06LP0-022A⑩
---	--------------------	--------------------	--------------------

UL1430, XL-PVC, W2B Lock In End 1 (End 1: Plug, End 2: Open)	SSL11-P02LP0-B22A⑩	SSL11-P04LP0-B22A⑩	SSL11-P06LP0-B22A⑩
---	--------------------	--------------------	--------------------

UL1430, XL-PVC, W2W Lock In End 1 (End 1: Plug, End 2: Open)	SSL11-P02LP0-W22A⑩	SSL11-P04LP0-W22A⑩	SSL11-P06LP0-W22A⑩
---	--------------------	--------------------	--------------------

STRAIGHT-TO-STRAIGHT, Overmolded With Wires Double Ended (Contact Gender: Plug)
⑩ Wire/Cable Length: (01) 100mm ~ (99) 9,900mm¹⁾

UL1430, XL-PVC, No Lock (Plug To Plug)	SSL11-P02L2P-022D⑩	SSL11-P04L2P-022D⑩	SSL11-P06L2P-022D⑩
--	--------------------	--------------------	--------------------

UL1430, XL-PVC, No Lock (Plug To Jack)	SSL11-P02LJP-022D⑩	SSL11-P04LJP-022D⑩	SSL11-P06LJP-022D⑩
--	--------------------	--------------------	--------------------

UL1430, XL-PVC, Two W2W Locks (Plug To Plug)	SSL11-P02L2P-T22D⑩	SSL11-P04L2P-T22D⑩	SSL11-P06L2P-T22D⑩
--	--------------------	--------------------	--------------------

UL1430, XL-PVC, Two W2W Locks (Plug To Jack)	SSL11-P02LJP-T22D⑩	SSL11-P04LJP-T22D⑩	SSL11-P06LJP-T22D⑩
--	--------------------	--------------------	--------------------

SMT Board, **STRAIGHT** (Contact Gender: Jack)
Wires Assembly Options: For PCB Mount Type | Without Lock, Non-Waterproof

SMT Board Straight With Post	SSL11-J02A00-000001	SSL11-J04A00-000001	SSL11-J06A00-000001
------------------------------	---------------------	---------------------	---------------------

SMT Board, **RIGHT ANGLE** (Contact Gender: Jack)
Wires Assembly Options: For PCB Mount Type | Without Lock, Non-Waterproof

SMT Board Right Angle With Post	SSL11-J02C00-000001	SSL11-J04C00-000001	SSL11-J06C00-000001
---------------------------------	---------------------	---------------------	---------------------

SMT Board Right Angle Without Post	SSL11-J02D00-000001	SSL11-J04D00-000001	SSL11-J06D00-000001
------------------------------------	---------------------	---------------------	---------------------

STRAIGHT, Overmolded With Wires Single Ended (Contact Gender: Jack, With Strain Relief)
⑩ Wire/Cable Length: (01) 100mm ~ (99) 9,900mm¹⁾

UL1430, XL-PVC, No Lock (End 1: Plug, End 2: Open)	SSL11-J02LJ0-022A⑩	SSL11-J04LJ0-022A⑩	SSL11-J06LJ0-022A⑩
---	--------------------	--------------------	--------------------

UL1430, XL-PVC, W2B Lock In End 1 (End 1: Plug, End 2: Open)	SSL11-J02LJ0-B22A⑩	SSL11-J04LJ0-B22A⑩	SSL11-J06LJ0-B22A⑩
---	--------------------	--------------------	--------------------

UL1430, XL-PVC, W2W Lock In End 1 (End 1: Plug, End 2: Open)	SSL11-J02LJ0-W22A⑩	SSL11-J04LJ0-W22A⑩	SSL11-J06LJ0-W22A⑩
---	--------------------	--------------------	--------------------

STRAIGHT-TO-STRAIGHT, Overmolded With Wires Double Ended (Contact Gender: Jack)
⑩ Wire/Cable Length: (01) 100mm ~ (99) 9,900mm¹⁾

UL1430, XL-PVC, No Lock (Jack To Jack)	SSL11-J02L2J-022D⑩	SSL11-J04L2J-022D⑩	SSL11-J06L2J-022D⑩
--	--------------------	--------------------	--------------------


UL1430, XL-PVC, Two W2W Locks (Jack To Jack)	SSL11-J02L2J-T22D⑩	SSL11-J04L2J-T22D⑩	SSL11-J06L2J-T22D⑩
--	--------------------	--------------------	--------------------

Mating

Pair

¹⁾ Every 100mm As Per Extension


Customization - Upon Request

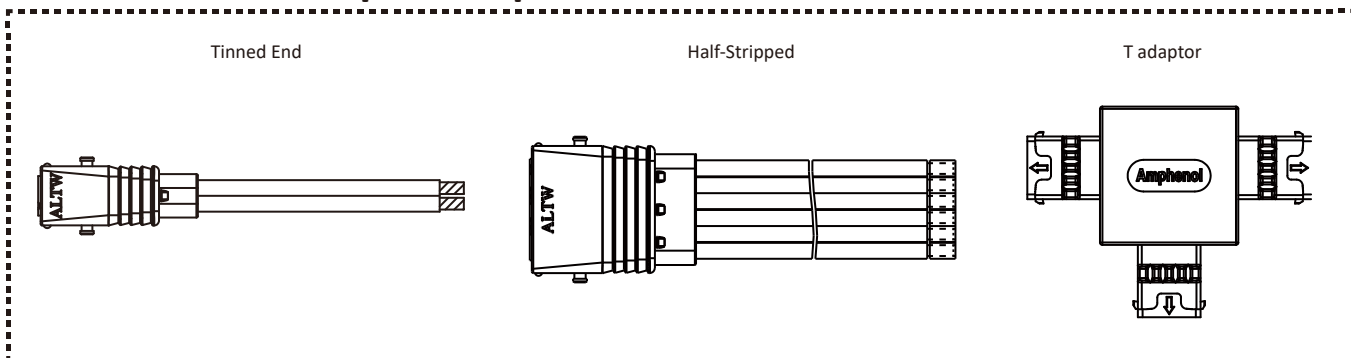


PCB Layout SMT Receptacle

Jack

>> 2P

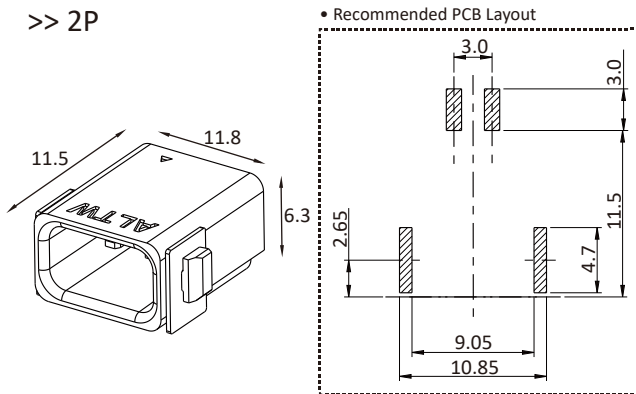


>> 4P

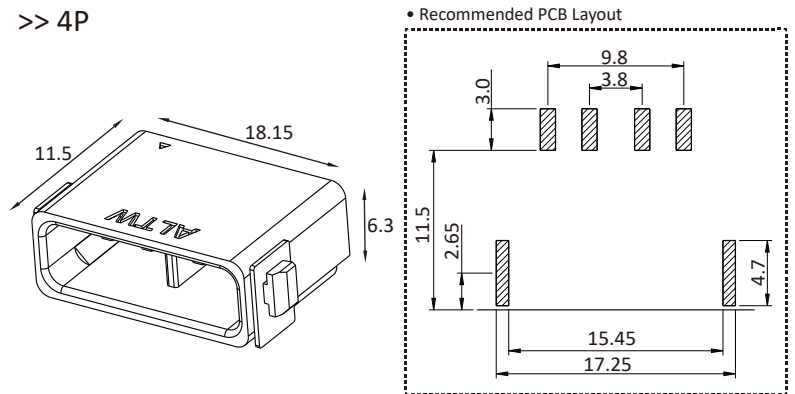


Field Serviceable/Installable

Plug



>> 2P

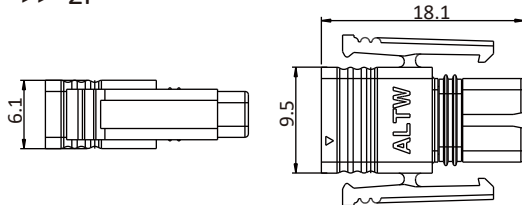

Jack

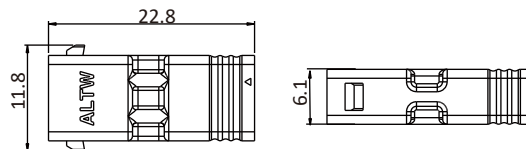

>> 4P

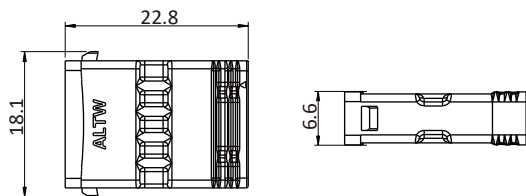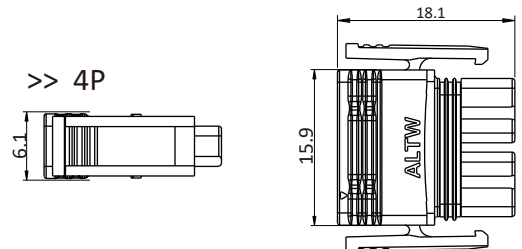


(Unit: mm)


Overmolded With Cable

Plug



>> 2P

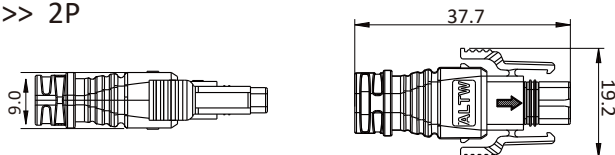

Jack

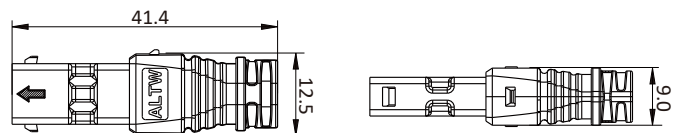


>> 4P

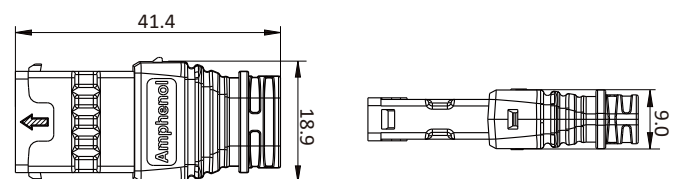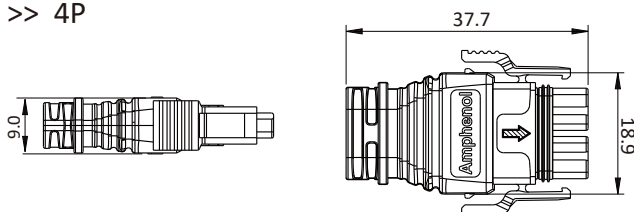



SSL 1.2 - Plastic Jack / Plug

Packing Information For SMT Receptacle

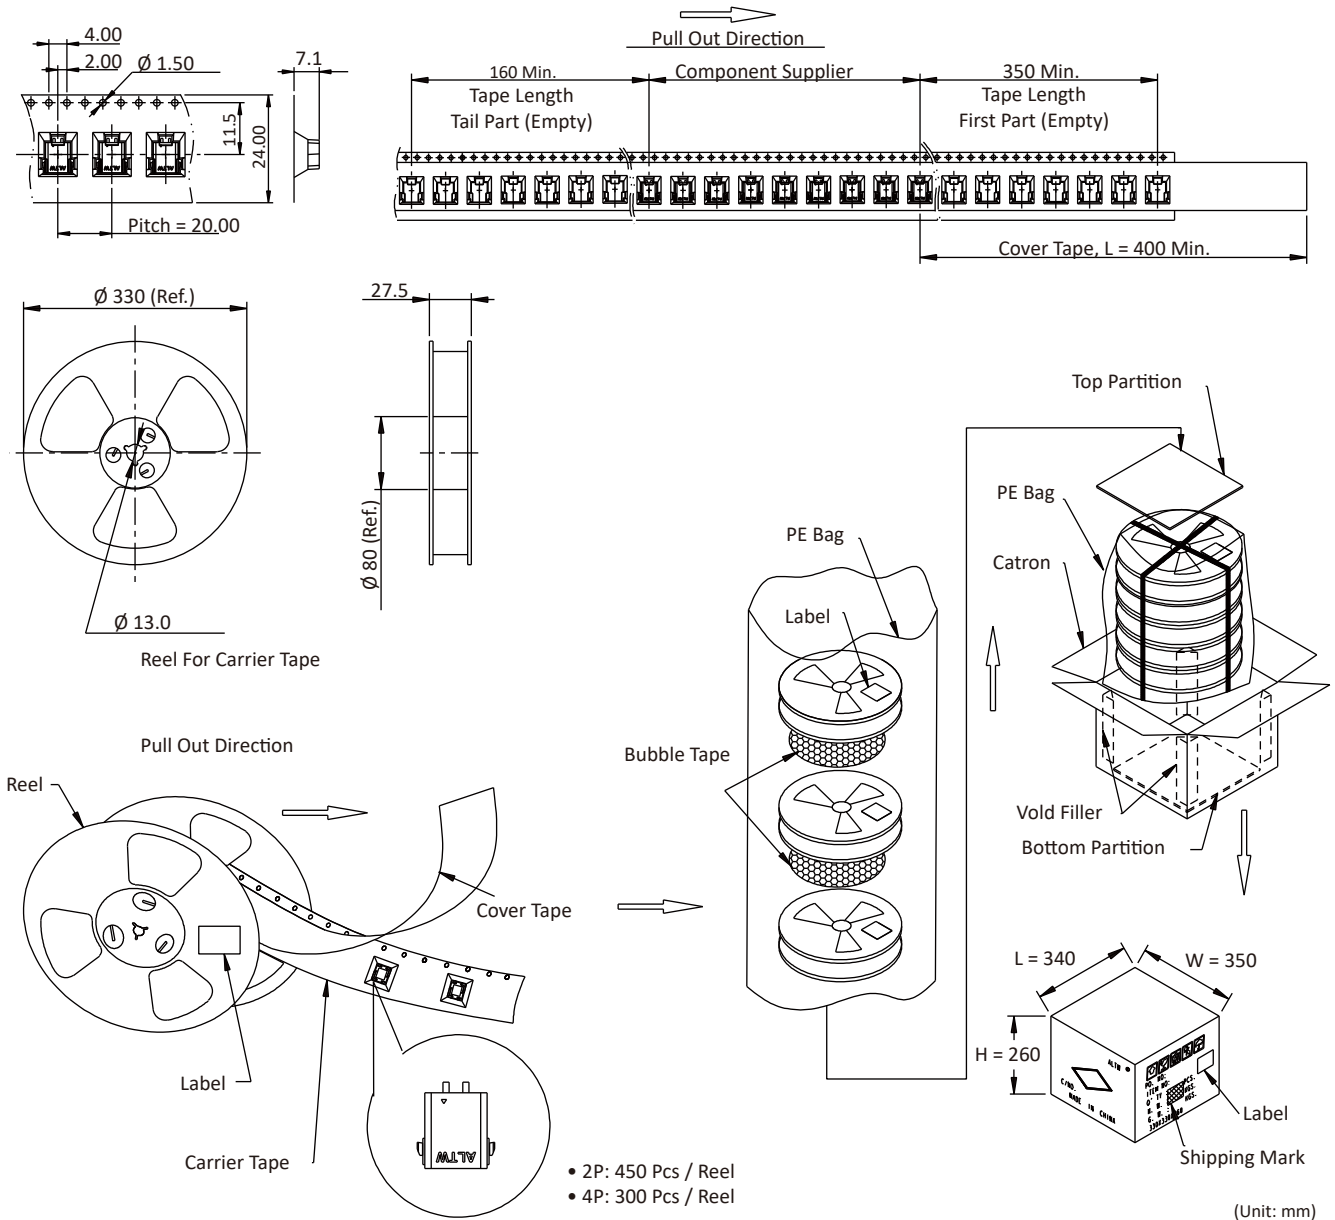


Accessories

Customization - Upon Request



For Jack Field Serviceable/Installable


- Part Number: BBA00010666



For Plug Field Serviceable/Installable

- Part Number: BBA00010667

Packing Information

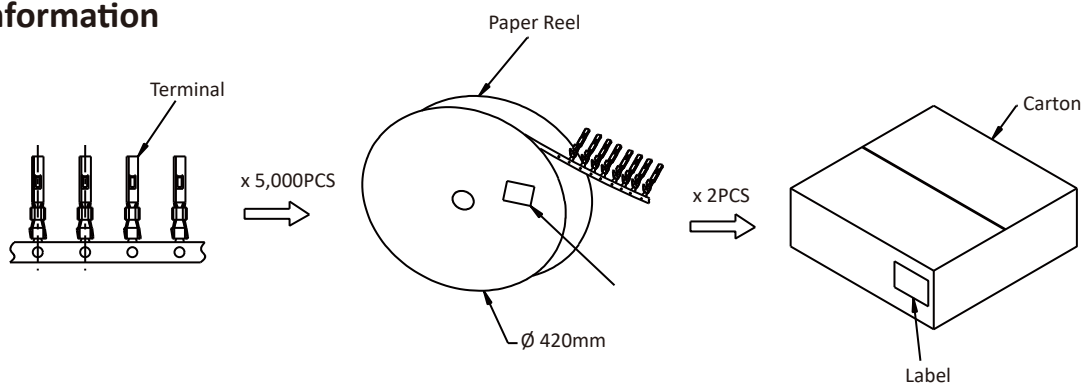

SSL 1.2 - Plastic Jack / Plug

No of Contacts	2	4
Rated Voltage (AC/DC)	Wire 250V, Flat Cable 300V	
Nominal Current	5A	
Plastic / Metal	Plastic	
Field Serviceable/Installable (Contact Gender: Plug, IP68 Mated)		
Wires Assembly Options: For PCB Mount Type With Two Latches Contact BBA00010667 Excluded		
End 1: Plug, End 2: Open With Two Latches	SSL12-P02FP0-M000001	SSL12-P04FP0-M000001
STRAIGHT , Overmolded With Wires Single Ended (Contact Gender: Plug, IP68 Mated)		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ With Two Latches Wire Size: 20AWG (0.50mm ²)		
UL1430, XL-PVC End 1: Plug, End 2: Open	SSL12-P02LP0-M20A 10	SSL12-P04LP0-M20A 10
STRAIGHT-TO-STRAIGHT , Overmolded With Wires Double Ended (Contact Gender: Plug, IP68 Mated)		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ With Two Latches Wire Size: 20AWG (0.50mm ²)		
UL1430, XL-PVC (Plug to Plug)	SSL12-P02L2P-M20A 10	SSL12-P04L2P-M20A 10
STRAIGHT , Overmolded With Flat Cable Single Ended (Contact Gender: Plug, IP68 Mated) NEW		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ With Two Latches		
UL 21996, PVC, 18AWG (0.75mm ²), White Jacket	SSL12-P02LP0-M18F 10	SSL12-P04LP0-M18F 10
UL 21996, PVC, 18AWG (0.75mm ²), Black Jacket	SSL12-P02LP0-M18H 10	SSL12-P04LP0-M18H 10
UL 21996, PVC, 20AWG (0.50mm ²), White Jacket	SSL12-P02LP0-M20F 10	SSL12-P04LP0-M20F 10
UL 21996, PVC, 20AWG (0.50mm ²), Black Jacket	SSL12-P02LP0-M20H 10	SSL12-P04LP0-M20H 10
STRAIGHT , Overmolded With Flat Cable Double Ended (Contact Gender: Plug, IP68 Mated) NEW		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ With Two Latches		
UL 21996, PVC, 18AWG (0.75mm ²), White Jacket	SSL12-P02L2P-M18F 10	SSL12-P04L2P-M18F 10
UL 21996, PVC, 18AWG (0.75mm ²), Black Jacket	SSL12-P02L2P-M18H 10	SSL12-P04L2P-M18H 10
UL 21996, PVC, 20AWG (0.50mm ²), White Jacket	SSL12-P02L2P-M20F 10	SSL12-P04L2P-M20F 10
UL 21996, PVC, 20AWG (0.50mm ²), Black Jacket	SSL12-P02L2P-M20H 10	SSL12-P04L2P-M20H 10
SMT Board, RIGHT ANGLE (Contact Gender: Jack, IP68 Mated)		
Wires Assembly Options: For PCB Mount Type Without Lock		
SMT Board Right Angle Without Post	SSL12-J02D00-000001	SSL12-J04D00-000001
Field Serviceable/Installable (Contact Gender: Jack, IP68 Mated)		
Wires Assembly Options: For PCB Mount Type Without Lock Contact BBA00010666 Excluded		
End 1: Jack, End 2: Open	SSL12-J02FJ0-000001	SSL12-J04FJ0-000001
STRAIGHT , Overmolded With Wires Single Ended (Contact Gender: Jack, IP68 Mated)		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ Wire Size: 20 AWG (0.50mm ²)		
UL1430, XL-PVC, Without Lock End 1: Jack, End 2: Open	SSL12-J02LJ0-020A 10	SSL12-J04LJ0-020A 10
STRAIGHT , Overmolded With Wires Double Ended (Contact Gender: Jack, IP68 Mated)		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ Without Lock Wire Size: 20 AWG (0.50mm ²)		
UL1430, XL-PVC (Jack to Jack)	SSL12-J02L2J-020A 10	SSL12-J04L2J-020A 10
UL1430, XL-PVC (Jack to Plug)	SSL12-J02LJP-020A 10	SSL12-J04LJP-020A 10
STRAIGHT , Overmolded With Flat Cable Single Ended (Contact Gender: Jack, IP68 Mated) NEW		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ Without Lock		
UL 21996, PVC, 18AWG (0.75mm ²), White Jacket	SSL12-J02LJ0-018F 10	SSL12-J04LJ0-018F 10
UL 21996, PVC, 18AWG (0.75mm ²), Black Jacket	SSL12-J02LJ0-018H 10	SSL12-J04LJ0-018H 10
UL 21996, PVC, 20AWG (0.50mm ²), White Jacket	SSL12-J02LJ0-020F 10	SSL12-J04LJ0-020F 10
UL 21996, PVC, 20AWG (0.50mm ²), Black Jacket	SSL12-J02LJ0-020H 10	SSL12-J04LJ0-020H 10
STRAIGHT-TO-STRAIGHT , Overmolded With Flat Cable Double Ended (Contact Gender: Jack, IP68 Mated) NEW		
10 Cable Length: (01) 1M ~ (99) 99M ¹⁾ Without Lock		
UL 21996, PVC, 18AWG (0.75mm ²), White Jacket	SSL12-J02L2J-018F 10	SSL12-J04L2J-018F 10
UL 21996, PVC, 18AWG (0.75mm ²), Black Jacket	SSL12-J02L2J-018H 10	SSL12-J04L2J-018H 10
UL 21996, PVC, 18AWG (0.75mm ²), White Jacket	SSL12-J02LJP-018F 10	SSL12-J04LJP-018F 10
UL 21996, PVC, 18AWG (0.75mm ²), Black Jacket	SSL12-J02LJP-018H 10	SSL12-J04LJP-018H 10
UL 21996, PVC, 20AWG (0.50mm ²), White Jacket	SSL12-J02L2J-020F 10	SSL12-J04L2J-020F 10
UL 21996, PVC, 20AWG (0.50mm ²), Black Jacket	SSL12-J02L2J-020H 10	SSL12-J04L2J-020H 10
UL 21996, PVC, 20AWG (0.50mm ²), White Jacket	SSL12-J02LJP-020F 10	SSL12-J04LJP-020F 10
UL 21996, PVC, 20AWG (0.50mm ²), Black Jacket	SSL12-J02LJP-020H 10	SSL12-J04LJP-020H 10

M
a
t
i
n
g

P
a
i
r


¹⁾ Every 100mm As Per Extension

SSL 1.3 - The Bridge

Nominal Current	No. of Contacts	Part Number
5A	01	SSL13-D1S00-000001





- ① One piece design for PCB connection and power transmission
- ② Low profile connection and power transmission 20.0x5.1x4.5 mm

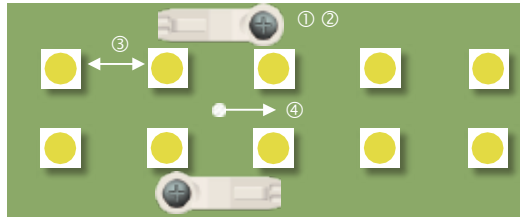


- ③ Suitable for various LED pitch applications
- ④ Seamless PCB connection without extra space needed

PCB Layout



SMT Receptacle

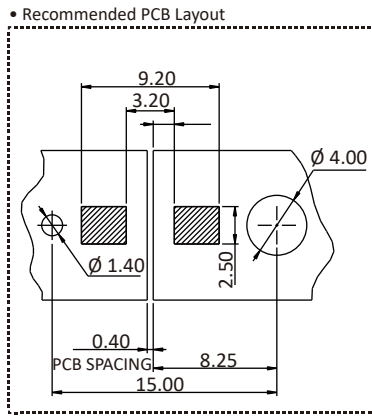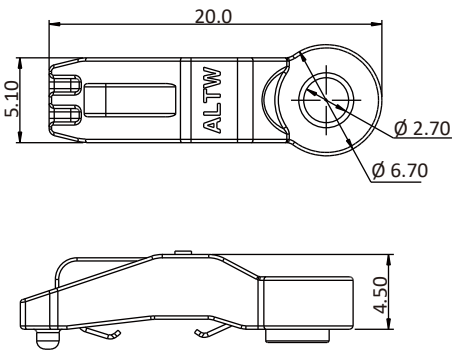



(Unit: mm)

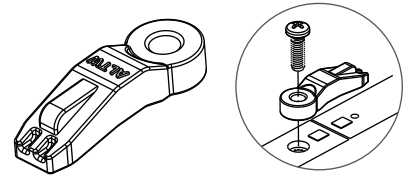

Packing Information

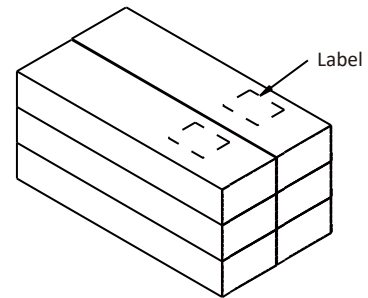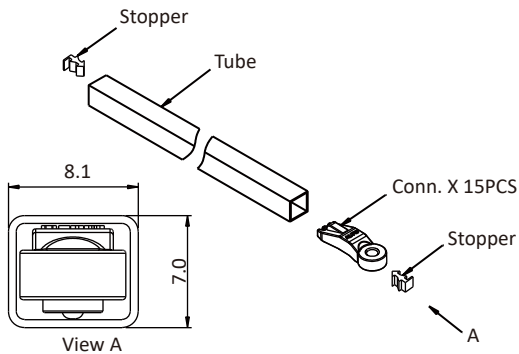

6 Box Into 1 Carton

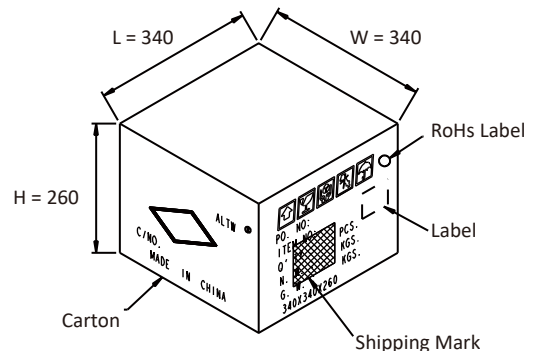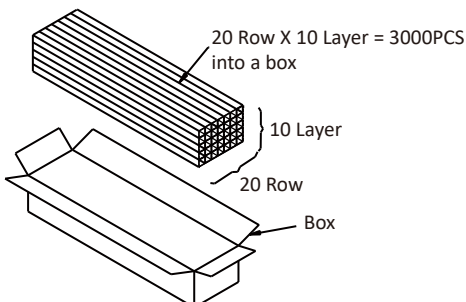


SSL 2.1 - Inverted Thru Board







Nominal Current	No. of Contacts	Part Number
12A	02	SSL21-J2E00-000001

PCB Layout

SMT Receptacle

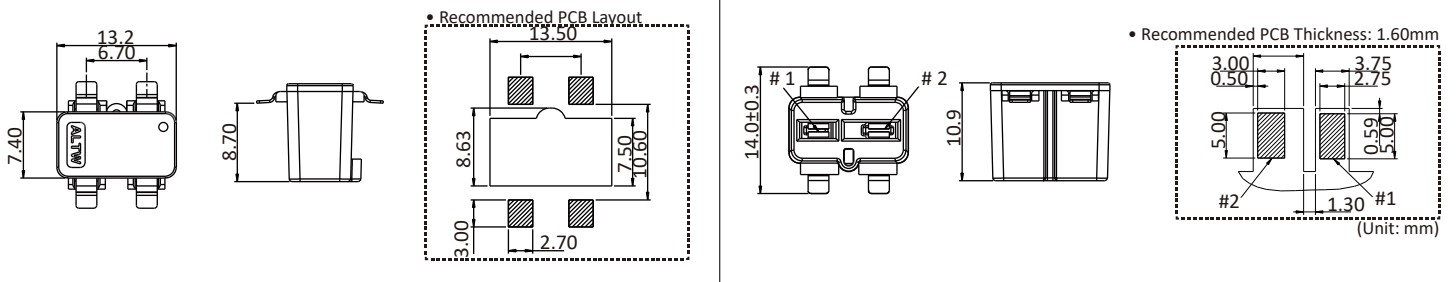

Packing Information

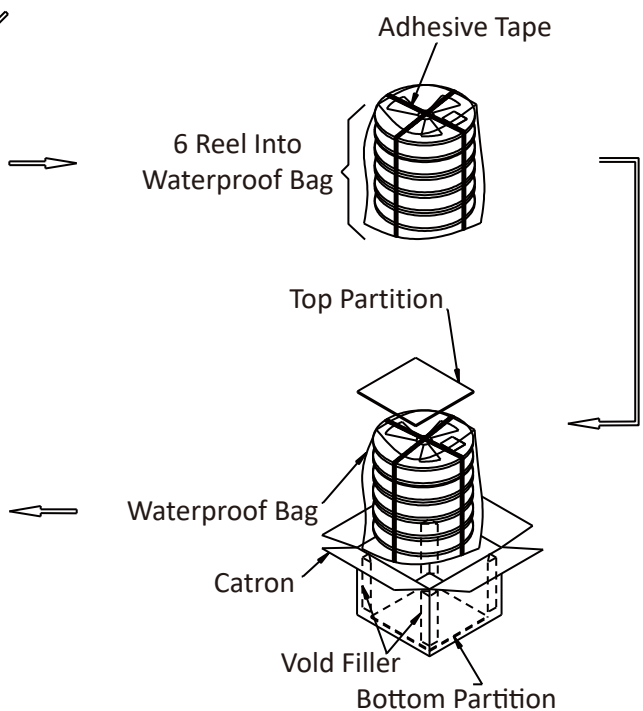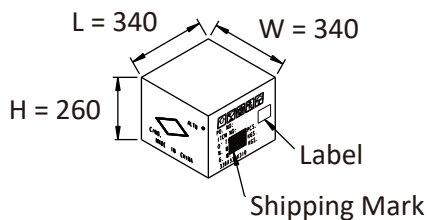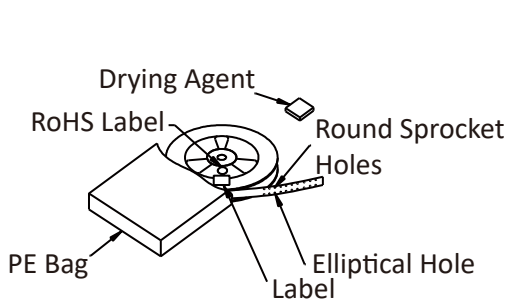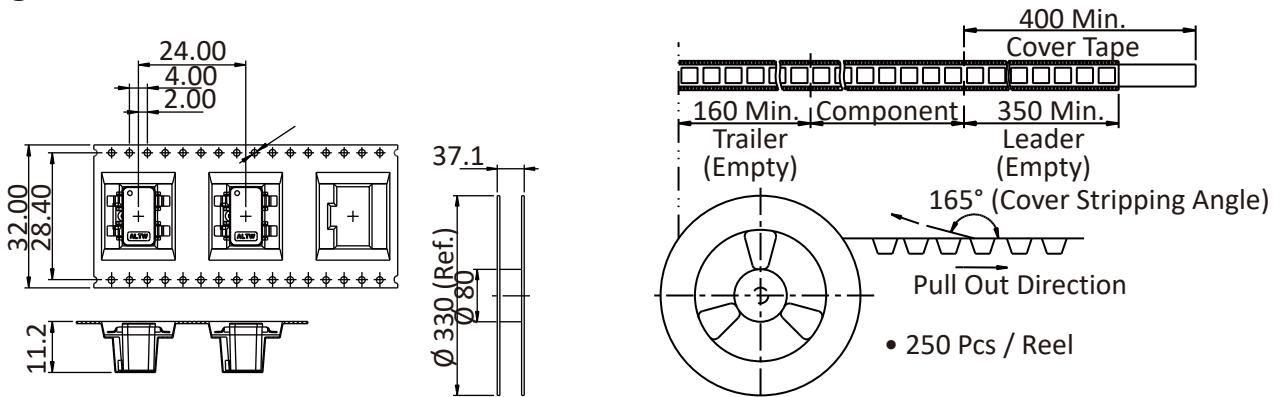


SSL 2.3 - EZ-Base


Nominal Current	Part Number
3A	SSL23-D2S00-000001

PCB Layout


Screw Base

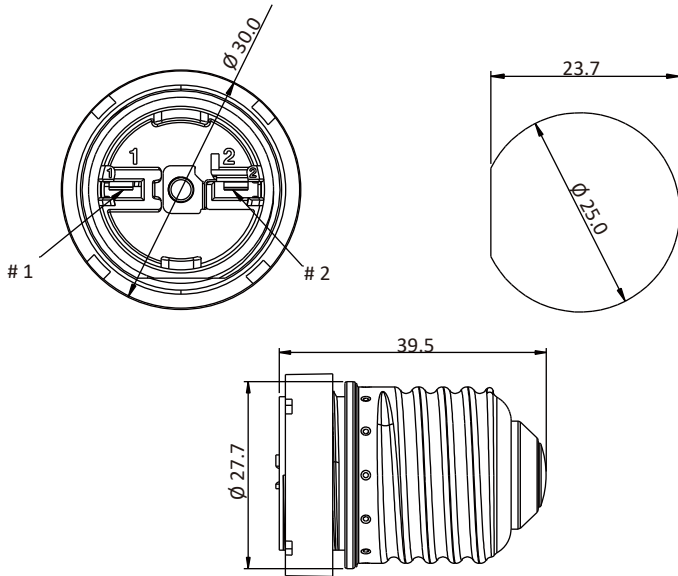


Recommended PCB Layout

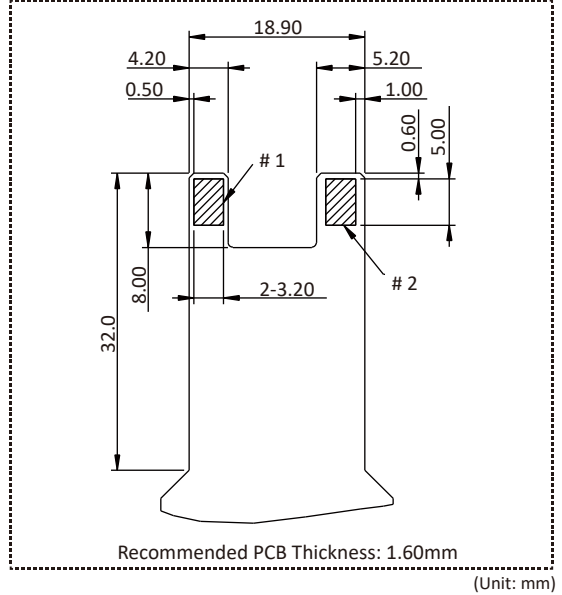

Packing Information

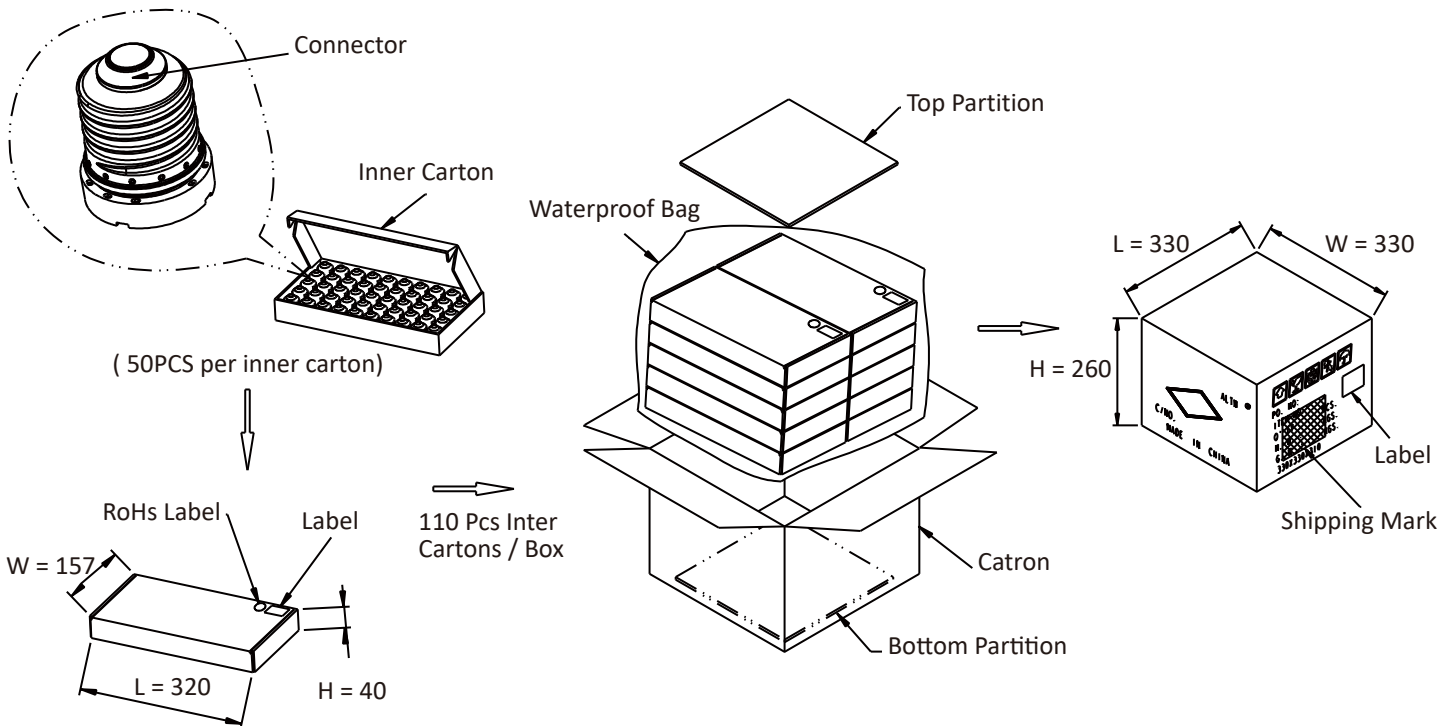


Assembly Instruction SSL 1.2 Crimp Type

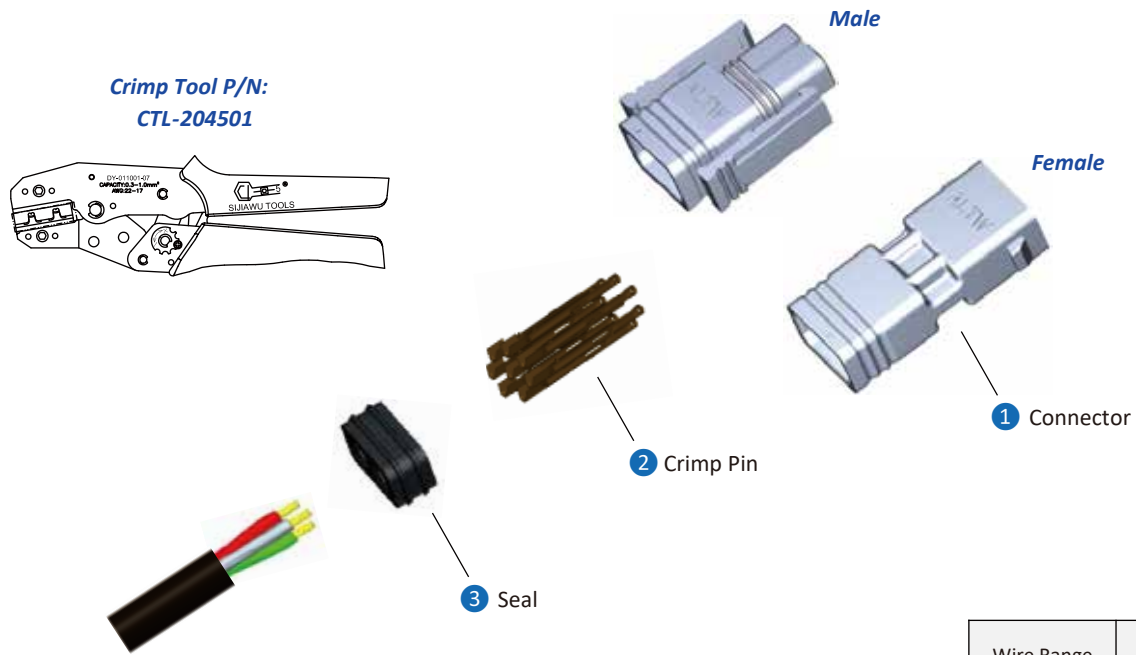


Wire Range	22 ~ 20 AWG (0.34 ~ 0.50 mm ²)
Wire O.D. (Unit: mm)	1.6 ~ 2.0

1

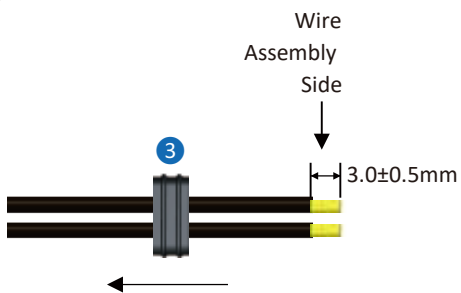


Put wires through 3, then strip wire insulation accordingly.

2

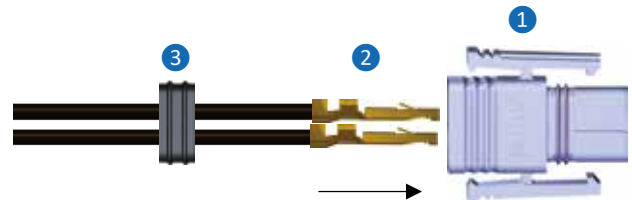

Terminate conductors onto crimp contacts and insert them into 1 until you hear click sound.

3

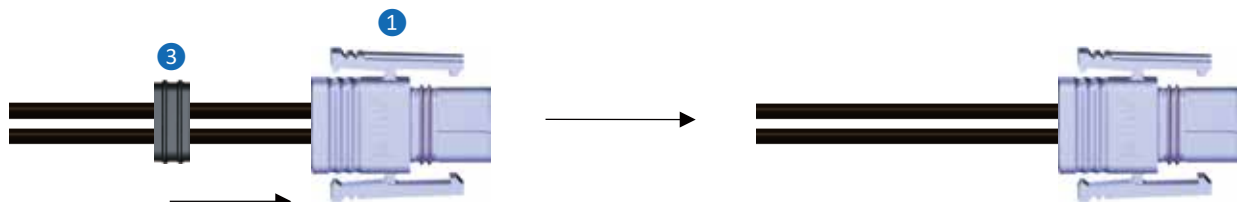

Assemble 3 into 1, and make sure 3 is completely in 1.

Ingress Protection (IP) Rating Guide

Waterproof Definition

Unmated Waterproof



Standalone waterproof or waterproof is assured even without its counterpart. The water will not go through the inner portion of the exposed connector as it is entirely sealed.

Mated Waterproof



Waterproof is only assured when mated and locked tightly to its counterpart.

1st Digit - SOLIDS

Degree of protection against solid objects

No Protection **0**

Protected against a solid object greater than 50mm, such as a hand. **1**

Protected against a solid object greater than 12.5mm, such as a finger. **2**

Protected against a solid object greater than 2.5mm, such as a wire. **3**

Protected against a solid object greater than 1.0mm, such as a thin strap. **4**

Dust Protected. Prevents ingress of dust sufficient to cause harm. **5**

Dust tight. No ingress of dust. **6**

2nd Digit - LIQUIDS

Degree of protection against water

No Protection **0**

Protected against water drops. **1**

Protected against water drops at a 15 degree angle. **2**

Protected against water spray at a 60 degree angle. **3**

Protected against water splashing from any angle. **4**

Protected against water jets from any angle. **5**

Protected against powerful water jets and heavy seas. **6**

Protected against the effects of temporary submersion in water (30 minutes at 3 feet). **7**

Protected against the effects of permanent submersion in water (up to 13 feet). **8**

Protection against close range, powerful and high temperature water jets. **9K**

Example:



IP 65

→ Protected against water jets from any angle.

→ Dust tight. No ingress of dust.

Amphenol LTW Technology Co., Ltd.

5F-3, No.51, Sec.4, Zhongyang Rd., Tucheng Dist., New Taipei City 236 Taiwan

Telephone : +886-2-7741-6888 Fax : +886-2-7741-6999

Email : sales@ltw-tech.com Web: amphenolltw.com

Kunshan Factory

No.62, DaTong Road, Development Zone, Kunshan City, JiangSu Province 215333 China

Telephone : +86-512-5761-0501 Fax : +86-512-5761-0515

For further information, please contact :

Q-FLEX

www.q-flex.fi info@q-flex.fi
+358 2 4894 500

