
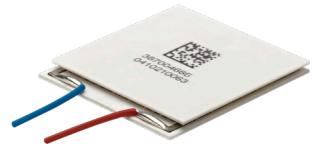


Q-FLEX

www.q-flex.fi info@q-flex.fi
+358 2 4894 500

Laird™
THERMAL SYSTEMS

Thermoelectric Coolers


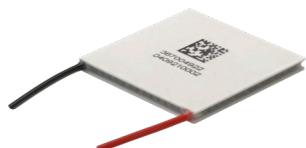


About Laird Thermal Systems

Laird Thermal Systems develops thermal management solutions for demanding applications across global medical, industrial, transportation and telecommunications markets. We manufacture one of the most diverse product portfolios in the industry ranging from active thermoelectric coolers and assemblies to temperature controllers and liquid cooling systems. Our engineers use advanced thermal modeling and management techniques to solve complex heat and temperature control problems. By offering a broad range of design, prototyping and in-house testing capabilities, we partner closely with our customers across the entire product development lifecycle to reduce risk and accelerate their time-to-market. Our global manufacturing and support resources help customers maximize productivity, uptime, performance and product quality. Laird Thermal Systems is the optimum choice for standard or custom thermal solutions.

Laird Thermal Systems partners with its customers to design custom thermal solutions for applications in many industries including:

- Medical Diagnostics
- Medical Imaging
- Battery Cooling
- Industrial Laser Systems
- Optoelectronics
- Analytical Instrumentation
- Semiconductor Fabrication
- Aerospace Defense
- Food & Beverage
- Automotive

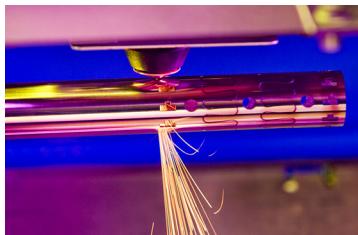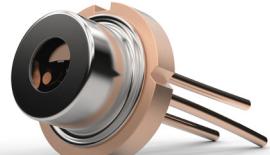


Introduction to Thermoelectrics

Solid state heat pumps have been in existence since the discovery of the Peltier effect in 1834. The devices became commercially available several decades ago with the development of advanced semiconductor thermocouple materials in combination with ceramics substrates.

Thermoelectric coolers are solid-state heat pumps that require a heat exchanger to dissipate heat utilizing the Peltier Effect. During operation, DC current flows through the thermoelectric cooler to create heat transfer and a temperature differential across the ceramic substrates, causing one side of the thermoelectric cooler to be cold, while the other side is hot. A standard single-stage thermoelectric cooler can achieve temperature differentials of up to 70°C.

A typical thermoelectric cooler's geometric footprint can vary from 2 x 2 mm's to 62 x 62 mm's and are light in weight. This makes thermoelectrics ideal for applications with tight geometric space constraints and low weight requirements when compared to much larger cooling technologies, such as conventional compressor-based systems. Thermoelectric coolers can also be used as a power generator to convert waste heat into usable output DC power.

Thermoelectrics are ideal for applications that require active cooling to below ambient and have cooling capacity requirements < 600 Watts. A design engineer should consider thermoelectric coolers when the system design criteria includes such factors as precise temperature control, high reliability, compact geometry constraints, low weight and environmental friendly requirements.

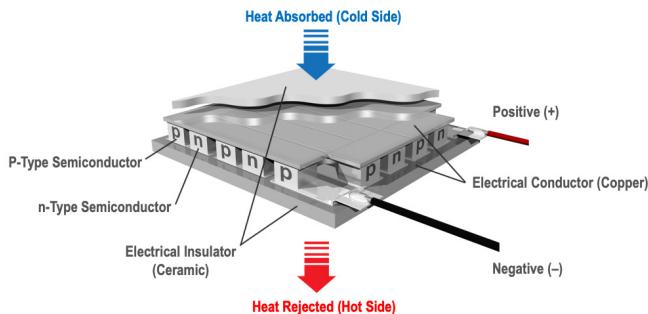

Benefits of Using Thermoelectrics

Thermoelectric coolers have several advantages over alternate cooling technologies:

- They have no moving parts, so the solid state construction results in high reliability and units can be mounted in any orientation.
- Thermoelectric coolers can cool devices down to well below ambient. Colder temperatures can be achieved, down to minus 100°C, by using a multistage thermoelectric cooler in a vacuum environment.
- Thermoelectrics are able to heat and cool by simply reversing the polarity, which changes the direction of heat transfer. This allows temperature control to be very precise, where up to 30.01°C can be maintained under steady-state conditions.
- In heating mode, thermoelectric coolers are much more efficient than conventional resistive heaters because they generate heat from input power supplied plus additional heat generated by the heat pumping action.
- Devices are environmentally friendly because they use no CFC's and electrical noise is minimal.
- Thermoelectric coolers can be used as energy harvesters, turning waste heat into usable output DC power.

Product Portfolio

Laird Thermal Systems designs and manufactures thermoelectric coolers which adhere to strict process control standards and pass/fail criteria, assuring our customers receive the best possible modules. Our extensive standard product portfolio covers a wide range of cooling capacities, temperature differentials, input power requirements and geometric footprints. Standard finishing options are available to accommodate alternate lead lengths, lapping thickness tolerances, and moisture protective sealants. Standard pre-tinning and solder constructions are available to accommodate solder-able mounting of the thermoelectric cooler to the heat exchanger, or processing of thermoelectric cooler through a reflow oven to solder onto an optoelectronic package.


Laird Thermal Systems offers several thermoelectric cooler product families that can be classified by cooling capacity, temperature differential, form factor or thermal cycling capability. Reference perceptual map below as a general guide as to where each product family fits with regards to these attributes.

Rapid Prototyping Center

Since there are so many unique attributes that need to be ascertained for each application, often a customized thermoelectric cooler will yield a more optimal thermal solution. Laird Thermal Systems offers strong engineering services with a global presence that supports onsite concept generation, thermal modeling, thermal design and rapid prototyping. We also offer validation test services to meet unique compliance standards for each industry, such as Telcordia, MIL-STDs or standards specific to unique application. Minimum order quantity (MOQ) applies for all custom thermoelectric cooler designs and validation testing.

Custom Thermoelectric Coolers

- Patterning and Plating on Substrates
- Test Validation
- TE semiconductor Processing
- Lapping, Wiring and Sealing
- Tooling Fabrication
- Thermoelectric Cooler Assembly

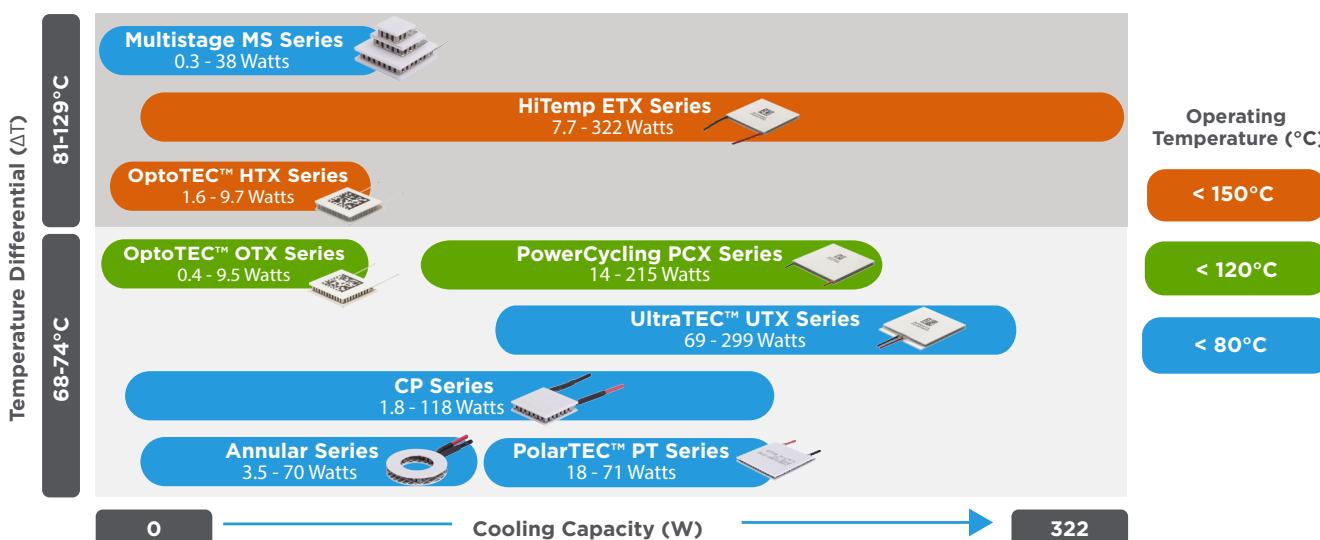

Thermoelectric Applications

Thermoelectric cooler assemblies are used in a wide range of applications to stabilize the temperature of sensitive electronic components or to cool devices and compartments below ambient.

Analytical

Temperature control is vital in analytical instrumentation equipment to enhance reliability and improve test results.

- Sample Storage Compartments
- Liquid Chromatography
- Incubators
- Molecular Diagnostics (PCR)

Medical

Temperature stabilization is required to obtain a high image resolution. Cooling reagent chambers below ambient is critical to extend life of reagents and keep replacement costs down. Rapid thermal cycling is crucial to speed up DNA amplification.

- Medical Diagnostics
- Medical Lasers
- Centrifuges

Industrial

Temperature stabilization is critical to maintain industrial lasers at peak performance and allows high end printing systems to produce high quality prints at high run rates.

- High Powered Projectors
- Kiosks
- Metrology Instrumentation
- Digital Color Printing Systems
- Industrial Laser Systems

Telecom

Cooling below ambient is necessary to extend life of batteries in wireless base stations. Temperature stabilization is required to maintain peak performance of laser diodes.



- Telecom Enclosures
- Battery Backup Systems
- Optical Transceivers

Transportation

Advancements in transportation technology such as smart headlights, and infotainment systems require thermal management solutions to protect the sensitive electronics and ensure long-life performance.

- Smart Lighting
- Heads-Up Displays
- Imaging Sensors

OptoTEC™ OTX/HTX Series

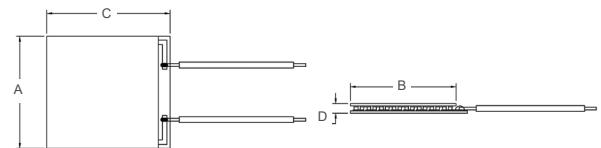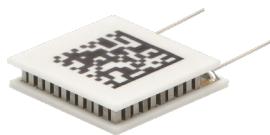

OTX Series

The OTX Series uses SbSn solder, enabling a maximum operating temperature of 120°C and a melting point of 232°C.

- High-performance thermoelectric cooler with advanced thermoelectric materials
- Miniature Form Factor
- Protects electronics in high temperature environments that operate in excess of 80°C.
- Ideal for temperature stabilization in optoelectronic applications including laser diodes, optical transceivers, LiDAR, CMOS and Infrared Range (IR) sensors.


| MFG PART NUMBER | DESCRIPTION | QMAX ⁽¹⁾ (WATTS) | IMAX (AMPS) | VMAX (VOLTS) | ΔTMAX (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽³⁾ (MM) |
|-----------------|------------------------------|--------------------------------|----------------|-----------------|---------------|---------------|---------------|---------------|------------------------------|
| 387006791 | OTX08-08-F0-0303-11-W2.25 | 0.4 | 0.8 | 0.9 | 72.9 | 4.9 | 3.3 | - | 2.6 |
| 387006650 | OTX08-18-F0-0505-11-W2.25 | 1 | 0.8 | 2.1 | 72.9 | 6.5 | 4.9 | - | 2.7 |
| 387006795 | OTX08-31-F1-0707-11-RT-W2.25 | 1.7 | 0.8 | 3.6 | 72.9 | 6.5 | 6.5 | - | 2.4 |
| 387006897 | OTX19-23-FIN-0608-11-W2.25 | 3.1 | 1.9 | 2.7 | 72.9 | 6 | 8.2 | - | 1.7 |
| 387006839 | OTX15-30-F2A-0610-11-W2.25 | 3.1 | 1.5 | 3.5 | 72.9 | 12.3 | 10.3 | 12.3 | 2 |
| 387006845 | OTX15-31-F2A-0909-20-W2.25 | 3.3 | 1.5 | 3.6 | 72.9 | 8.8 | 8.8 | 11 | 2.8 |
| 387006798 | OTX08-66-F0-1009-11-RT-W2.25 | 3.7 | 0.8 | 7.7 | 72.9 | 11.4 | 8.9 | - | 2.4 |
| 387006798 | OTX08-66-F0-1009-11-RT-W2.25 | 3.7 | 0.8 | 7.7 | 72.9 | 11.4 | 8.9 | - | 2.4 |
| 387007103 | OTX24-31-F1-1010-11-W2.25 | 5.4 | 2.5 | 3.6 | 72.9 | 10 | 10 | - | 2.5 |
| 387006832 | OTX12-65-F2A-1312-11-W2.25 | 5.5 | 1.2 | 7.6 | 72.9 | 13.2 | 12.1 | 13.2 | 2.7 |
| 387006834 | OTX12-65-F2A-1312-TB-W2.25 | 5.5 | 1.2 | 7.6 | 72.9 | 13.2 | 12.1 | 13.2 | 2.7 |
| 387006837 | OTX12-66-F0-1211-11-W2.25 | 5.5 | 1.2 | 7.7 | 72.9 | 14.2 | 11.2 | - | 2.7 |
| 387006836 | OTX12-66-F0-1211-TB-RT-W2.25 | 5.5 | 1.2 | 7.7 | 72.9 | 14.2 | 11.2 | - | 2.7 |
| 387006847 | OTX15-65-F2A-1312-11-W2.25 | 6.8 | 1.5 | 7.6 | 72.9 | 13.2 | 12.1 | 13.2 | 2.4 |
| 387006891 | OTX15-66-F0-1211-11-W2.25 | 6.9 | 1.5 | 7.7 | 72.9 | 14.2 | 11.2 | - | 2.4 |
| 387006893 | OTX15-68-F1A-1313-11-W2.25 | 7.1 | 1.5 | 7.9 | 72.9 | 13.2 | 13.2 | - | 2.4 |
| 387006926 | OTX20-65-F2A-1312-11-W2.25 | 9.1 | 2 | 7.6 | 72.9 | 13.2 | 12.1 | 13.2 | 2.2 |
| 387006927 | OTX20-66-F0-1211-11-W2.25 | 9.2 | 2 | 7.7 | 72.9 | 14.2 | 11.2 | - | 2.2 |
| 387006928 | OTX20-66-F0-1211-11-EP-W2.25 | 9.2 | 2 | 7.7 | 72.9 | 14.2 | 11.2 | - | 2.2 |
| 387006784 | OTX20-68-F1A-1313-11-W2.25 | 9.5 W | 2 | 7.9 | 72.9 | 13.2 | 13.2 | - | 2.2 |

HTX Series

The HTX Series uses AuSn solder, enabling a maximum operating temperature of 150°C and a melting point of 280°C.

| MFG PART NUMBER | DESCRIPTION | QMAX ⁽²⁾ (WATTS) | IMAX (AMPS) | VMAX (VOLTS) | ΔTMAX (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽³⁾ (MM) |
|-----------------|-------------------------------|--------------------------------|----------------|-----------------|---------------|---------------|---------------|---------------|------------------------------|
| 387007106 | HTX12-18-F2A-0606-11-RT-W2.25 | 1.6 | 1.2 | 2.3 | 81.6 | 6.1 | 6.2 | 7.2 | 2.7 |
| 387006534 | HTX12-18-F2A-0606-GG-W2.25 | 1.6 | 1.2 | 2.3 | 81.6 | 6.1 | 6.2 | 7.2 | 3 |
| 387007113 | HTX15-30-F2A-0610-11-W2.25 | 3.4 | 1.5 | 3.9 | 81.6 | 6.2 | 10.3 | 12.3 | 2 |
| 387007115 | HTX15-31-F2A-0909-TB-W2.25 | 3.5 | 1.5 | 4 | 81.6 | 8.8 | 8.8 | 11 | 2.4 |
| 387007120 | HTX20-31-F2A-0909-11-W2.25 | 4.6 | 2 | 4 | 81.6 | 8.8 | 8.8 | 11 | 2.2 |
| 387007108 | HTX12-65-F2A-1312-11-W2.25 | 5.8 | 1.2 | 8.4 | 81.6 | 13.2 | 12.1 | 13.2 | 2.7 |
| 387007112 | HTX12-65-F2A-1312-TB-RT-W2.25 | 5.8 | 1.2 | 8.4 | 81.6 | 13.2 | 12.1 | 13.2 | 2.7 |
| 387007117 | HTX15-65-F2A-1312-TB-W2.25 | 7.3 | 1.5 | 8.4 | 81.6 | 13.2 | 12.1 | 13.2 | 2.4 |
| 387007122 | HTX20-65-F2A-1312-11-W2.25 | 9.7 | 2 | 8.4 | 81.6 | 13.2 | 12.1 | 13.2 | 2.2 |
| 387007123 | HTX20-65-F2A-1312-TB-W2.25 | 9.7 | 2 | 8.4 | 81.6 | 13.2 | 12.1 | 13.2 | 2.2 |

UltraTEC™ UTX Series


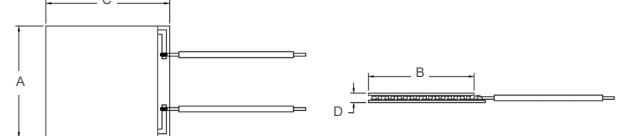


- High-Performance thermoelectric cooler with advanced thermoelectric materials.
- Feature a higher thermal insulating barrier than standard thermoelectric coolers.
- Ideal for demanding spot cooling in industrial lasers and laser projector applications.

| MFG PARTNUMBER | DESCRIPTION | QMAX ⁽¹⁾ (WATTS) | IMAX (AMPS) | VMAX (VOLTS) | ΔTMAX (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽³⁾ (MM) |
|----------------|-------------------------|--------------------------------|----------------|-----------------|---------------|---------------|---------------|---------------|------------------------------|
| 387004721 | UTX6-19-F1-4040-TA-W6 | 82.6 | 6.1 | 22.8 | 71.7 | 40 | 40 | 40 | 3.9 |
| 387004702 | UTX6-24-F1-5555-TA-W6 | 100 | 6.1 | 27.6 | 71.7 | 55 | 55 | 55 | 3.9 |
| 387004705 | UTX8-12-F2-2525-TA-W6 | 68.5 | 7.9 | 14.6 | 71.7 | 25 | 25 | 25 | 1.9 |
| 387004697 | UTX8-12-F2-3030-TA-W6 | 68.5 | 7.9 | 14.6 | 71.7 | 30 | 30 | 34 | 2.6 |
| 387004726 | UTX8-24-F1-5555-TA-W6 | 140.2 | 8.6 | 27.6 | 71.7 | 55 | 55 | 55 | 3.8 |
| 387004679 | UTX8-200-F2-4040-TA-W6 | 116.4 | 8.6 | 22.9 | 71.7 | 40 | 40 | 44 | 3.8 |
| 387004724 | UTX8-288-F2-5252-TA-W6 | 167.6 | 8.6 | 33 | 71.7 | 52 | 52 | 56 | 3.8 |
| 387004723 | UTX9-28-F2-4040-TA-W6 | 196.0 | 10.0 | 33 | 71.7 | 40 | 40 | 44 | 2.8 |
| 387004680 | UTX11-12-F2-3030-TA-W6 | 95.2 | 11 | 14.6 | 71.7 | 30 | 30 | 34 | 2.4 |
| 387004685 | UTX15-12-F2-4040-TA-W6 | 125.7 | 14.6 | 14.6 | 71.7 | 40 | 40 | 44 | 2.8 |
| 387004719 | UTX15-24-F2-5252-TA-W6 | 251.2 | 15.3 | 27.8 | 71.7 | 52 | 52 | 56 | 3.3 |
| 387004711 | UTX15-200-F2-4040-TA-W6 | 207.6 | 15.3 | 22.9 | 71.7 | 40 | 40 | 44 | 3.3 |
| 387004692 | UTX15-288-F2-5252-TA-W6 | 298.9 | 15.3 | 33 | 71.7 | 52 | 52 | 56 | 3.3 |

Notes: 1) QMax rated value at $\Delta T = 0^\circ\text{C}$, Imax and Vmax, Th = 27°C 2) QMax rated value at $\Delta T = 0^\circ\text{C}$, Imax and Vmax, Th = 50°C 3) Thickness for non-metallized versions only.


PowerCycling PCX Series

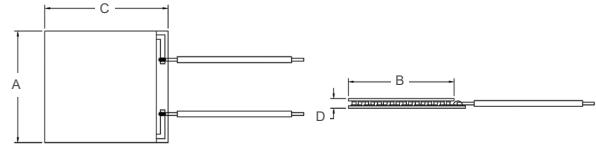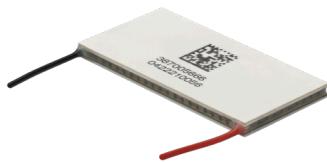

- High-performance thermoelectric cooler featuring a unique module construction to provide long life operation in thermal cycling applications.
- Advanced thermoelectric material boost cooling performance over standard product offerings.
- Tested to withstand rigorous cycle testing based on latest PCR industry test protocol.

| MFG PARTNUMBER | DESCRIPTION | QMAX ⁽¹⁾ (WATTS) | I _{MAX} (AMPS) | V _{MAX} (VOLTS) | ΔT _{MAX} (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽²⁾ (MM) |
|----------------|-----------------------------|-----------------------------|-------------------------|--------------------------|------------------------|------------|------------|------------|---------------------------|
| 387005667 | PCX2-12-F1-3030-TA-RT-W6 | 21.5 | 2.5 | 14.9 | 73.6 | 30 | 30 | | 4 |
| 387005673 | PCX4-4-F1-1515-TA-RT-W6 | 13.5 | 4.1 | 5.7 | 73.6 | 15 | 15 | | 2.8 |
| 387005514 | PCX4-7-F1-2020-TA-RT-W6 | 19.4 | 4 | 8.3 | 73.6 | 20 | 20 | | 3.5 |
| 387005671 | PCX4-12-F1-3030-TA-W6 | 34.7 | 4 | 14.9 | 73.6 | 30 | 30 | | 3.2 |
| 387005676 | PCX5-16-F1-4040-TA-W6 | 54 | 4.9 | 18.8 | 73.6 | 40 | 40 | | 3.7 |
| 387005677 | PCX5.6-19-F1N-3030-TA-RT-W6 | 77.7 | 5.8 | 23.3 | 73.6 | 30 | 30 | | 2.4 |
| 387005678 | PCX6-12-F1-4040-TA-RT-W6 | 51.8 | 6 | 14.9 | 73.6 | 40 | 40 | | 3.8 |
| 387005679 | PCX6-24-F1-5555-TA-RT-W6 | 98.3 | 6 | 28.2 | 73.6 | 55 | 55 | | 4.2 |
| 387005681 | PCX6-28-F2-4040-TA-RT-W6 | 117.4 | 6 | 33.7 | 73.6 | 40 | 40 | 44 | 3.1 |
| 387005685 | PCX7-16-F1-4040-TA-W6 | 77.3 | 7.1 | 18.8 | 73.6 | 40 | 40 | | 3.3 |
| 387005686 | PCX7.5-13-F1-4023-TA-RT-W6 | 68.4 | 7.7 | 15.3 | 73.6 | 40 | 23 | | 2.8 |
| 387005515 | PCX8-6-F1-2040-TA-RT-W6 | 37.4 | 8.8 | 7.4 | 73.6 | 20 | 40 | | 3.3 |
| 387007231 | PCX8-6-F1-3518-TA-RT-W6 | 37.4 | 8.8 | 7.4 | 73.6 | 35.5 | 18 | | 3.4 |
| 387005700 | PCX8-7-F2-3030-TA-RT-W6 | 42.2 | 8.8 | 8.3 | 73.6 | 30 | 30 | 34 | 3.3 |
| 387005696 | PCX8-12-F1-4040-TA-W6 | 75.5 | 8.8 | 14.9 | 73.6 | 40 | 40 | | 3.3 |
| 387005659 | PCX11-12-F2-3030-TA-RT-W6 | 96.6 | 11.2 | 14.9 | 73.6 | 30 | 30 | 34 | 2.4 |
| 387005660 | PCX11-191-F1-3553-TA-RT-W6 | 147.8 | 11.4 | 22.4 | 73.6 | 35 | 53 | | 3.4 |
| 387005662 | PCX12-139-F1-3550-TA-W6 | 118.6 | 12.6 | 16.3 | 73.6 | 35 | 50 | | 3 |
| 387005516 | PCX12-19-F1-4040-TA-RT-W6 | 165.7 | 12.3 | 23.3 | 73.6 | 40 | 40 | | 2.9 |
| 387005663 | PCX12-248-F1-5040-TA-RT-W6 | 206.5 | 12.3 | 29 | 73.6 | 50 | 40 | | 2.9 |
| 387005665 | PCX15.6-19-F1-4040-TA-RT-W6 | 215.2 | 16 | 23.3 | 73.6 | 40 | 40 | | 2.7 |
| 387007227 | PCX15-7-F1-4040-TA-RT-W6 | 78.4 | 16.3 | 8.3 | 73.6 | 40 | 40 | | 4.7 |
| 387005664 | PCX15-128-F2-4040-TA-RT-W6 | 135.3 | 15.6 | 15 | 73.6 | 40 | 40 | 44 | 3.3 |
| 387005669 | PCX24-128-F2-5555-TA-RT-W6 | 207.9 | 24 | 15 | 73.6 | 55 | 55 | 59 | 4 |

Multistage MS Series

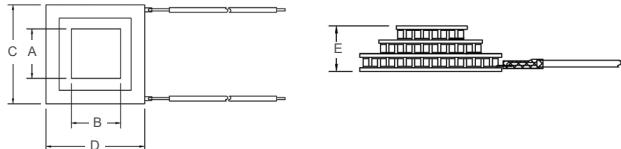


- Designed for large temperature differential applications.
- Custom designs available to meet unique cooling capacity or temp differential requirements.
- Ideal for CCD cameras, IR Detectors and industrial sensing instrumentation.

| MFG PARTNUMBER | PART NO. | QMAX ⁽¹⁾ (WATTS) | I _{MAX} (AMPS) | V _{MAX} (VOLTS) | ΔT _{MAX} (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽²⁾ (MM) | DIM E (MM) |
|----------------|---------------------------|-----------------------------|-------------------------|--------------------------|------------------------|------------|------------|------------|---------------------------|------------|
| 9320001-301 | MS2-010-06-06-11-11-W2 | 0.3 | 1.2 | 0.78 | 94 | 3.2 | 3.2 | 3.9 | 3.9 | 4.2 |
| 9320002-301 | MS2-024-06-06-11-11-W2 | 0.8 | 1.2 | 1.8 | 91 | 4.1 | 4.1 | 6.1 | 6.1 | 4.6 |
| 9380001-301 | MS2-065-04-04-11-11-W4 | 0.9 | 0.5 | 4.6 | 87 | 12 | 4 | 14 | 6 | 4.7 |
| 9340001-301 | MS2-049-10-10-15-15-11-W8 | 3.1 | 2.3 | 3.5 | 89 | 11.5 | 11.5 | 15 | 15 | 6.6 |
| 9350001-301 | MS2-049-14-14-15-15-11-W8 | 6.1 | 4.5 | 3.5 | 89 | 15 | 15 | 20 | 20 | 7.2 |
| 475089-301 | MS2-068-14-14-15-15-11-W8 | 7.4 | 3.7 | 4.4 | 81 | 14.7 | 14.7 | 24 | 24 | 7.9 |
| 9340002-301 | MS2-107-10-10-12-12-11-W8 | 8.6 | 2.9 | 8 | 91 | 22.6 | 22.6 | 22.6 | 22.6 | 6.25 |
| 16503-310 | MS2-051-22-25-22-25-11-W8 | 10.3 | 6 | 3.4 | 82 | 26 | 26 | 30 | 30 | 10.9 |
| 475010-313 | MS2-102-14-14-17-17-11-W8 | 11.6 | 4.4 | 8 | 94 | 20 | 20 | 30 | 30 | 7.5 |
| 9340003-301 | MS2-190-10-10-12-12-11-W8 | 15.4 | 3 | 14.3 | 91 | 30 | 30 | 30 | 30 | 6.5 |
| 9350007-301 | MS2-192-14-20-15-25-11-W8 | 24.3 | 5.1 | 14.7 | 91 | 40 | 40 | 40 | 40 | 8.1 |
| 16506-302 | MS2-102-22-22-17-17-11-W8 | 27.9 | 10.6 | 8 | 94 | 30 | 30 | 44 | 44 | 9.1 |
| 9350006-301 | MS2-192-14-20-11-18-11-W8 | 38 | 6.9 | 14.8 | 90 | 40 | 40 | 40 | 40 | 8.1 |
| 16068-302 | MS3-052-10-17-11-W8 | 1.4 | 1.9 | 3.3 | 108 | 7.2 | 7.2 | 15 | 15 | 9.8 |
| 9360001-301 | MS3-070-20-25-11-W8 | 3 | 6.1 | 5.5 | 122 | 14 | 8 | 36 | 36 | 16 |
| 9340004-301 | MS3-231-10-15-11-W8 | 6.7 | 2 | 14.3 | 106 | 15 | 15 | 30 | 30 | 9.5 |
| 9350004-301 | MS3-119-14-15-11-W8 | 6.7 | 4 | 7.5 | 107 | 15 | 15 | 30 | 30 | 10.4 |
| 9360002-301 | MS3-119-20-15-11-W8 | 14 | 8.1 | 7.6 | 106 | 22 | 22 | 44 | 44 | 12.9 |
| 475024-303 | MS4-108-10-20-11-W8 | 1.1 | 1.4 | 6.3 | 120 | 7.1 | 7.1 | 18 | 24 | 14.6 |
| 9340005-301 | MS4-129-10-15-11-W8 | 1.8 | 1.8 | 7.3 | 120 | 8 | 8 | 23 | 23 | 12.5 |
| 9350005-301 | MS4-115-14-15-11-W8 | 2.8 | 3.9 | 7.1 | 124 | 14.5 | 4.5 | 33 | 24 | 13.8 |
| 9340006-301 | MS5-257-10-15-11-W8 | 2 | 1.7 | 13.5 | 129 | 8 | 8 | 30 | 30 | 15.4 |

Notes: 1) QMax rated value at ΔT = 0°C, I_{max} and V_{max}, Th = 27°C 2) Thickness for non-metallized versions only.



HiTemp ETX Series

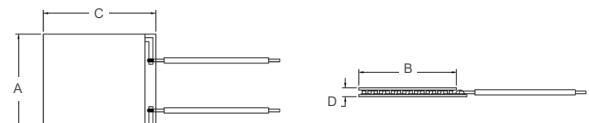

- High-Performance thermoelectric cooler with advanced thermoelectric materials and an enhanced module construction.
- Features a higher thermal insulating barrier than standard thermoelectric coolers.
- Protects electronics in high temperature environments that operate in excess of 80°C.
- Ideal for cooling in autonomous systems, machine vision and digital light processors.

| MFG PART NUMBER | PART NO. | QMAX ⁽¹⁾ (WATTS) | IMAX (AMPS) | VMAX (VOLTS) | ΔTMAX (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽³⁾ (MM) |
|-----------------|----------------------------|-----------------------------|-------------|--------------|------------|------------|------------|------------|---------------------------|
| 387004952 | ETX1.6-12-F2-3030-TA-RT-W6 | 15.7 | 1.6 | 16.6 | 83.2 | 30 | 30 | 34 | 4 |
| 387004961 | ETX2-6-F1-1225-TA-RT-W6 | 10.2 | 2.1 | 8.2 | 83.2 | 12.5 | 25 | | 3.2 |
| 387005318 | ETX2-12-F1-2525-TA-W6 | 20.6 | 2.1 | 16.6 | 83.2 | 25 | 25 | | 3.4 |
| 387004970 | ETX2-12-F2-3030-TA-W6 | 22.6 | 2.3 | 16.6 | 83.2 | 30 | 30 | 34 | 3.4 |
| 387004960 | ETX2.3-4-F1-1919-TA-RT-W6 | 8.7 | 2.3 | 6.4 | 83.2 | 19.4 | 19.4 | | 3.58 |
| 387004964 | ETX2.5-12-F1-3030-TA-RT-W6 | 24.1 | 2.5 | 16.6 | 83.2 | 30 | 30 | | 4 |
| 387004969 | ETX2.5-12-F1-4040-TA-RT-W6 | 24.1 | 2.5 | 16.6 | 83.2 | 40 | 40 | | 4.2 |
| 387004959 | ETX2.6-6-F1-1225-TA-W6 | 12.7 | 2.6 | 8.2 | 83.2 | 12.5 | 25 | | 3.1 |
| 387005354 | ETX2.6-12-F1-2525-TA-W6 | 25.5 | 2.6 | 16.6 | 83.2 | 25 | 25 | | 3.1 |
| 387004923 | ETX3-3-F2-1518-TA-W6 | 7.7 | 3.2 | 4.1 | 83.2 | 15 | 15 | 18 | 3.6 |
| 387004933 | ETX3-48-F1-1212-GG-W6 | 11.3 | 3.1 | 6.3 | 83.2 | 12 | 12 | | 2.38 |
| 387004968 | ETX3-12-F2-3030-TA-RT-W6 | 31.4 | 3.2 | 16.6 | 83.2 | 30 | 30 | 34 | 3.58 |
| 387004942 | ETX4-3-F1-1515-TA-RT-W6 | 9.5 | 4.0 | 4.1 | 83.2 | 15 | 15 | | 3.2 |
| 387004946 | ETX4-3-F1-2020-TA-RT-W6 | 9.2 | 3.9 | 4.1 | 83.2 | 20 | 20 | | 4.7 |
| 387004956 | ETX4-6-F2-2143-TA-RT-W6 | 18.5 | 3.8 | 8.2 | 83.2 | 20.6 | 38.4 | 43.2 | 3.81 |
| 387004962 | ETX4-7-F1-2323-TA-W6 | 21.7 | 4.0 | 9.3 | 83.2 | 23 | 23 | | 3.2 |
| 387004929 | ETX4-7-F2-3030-TA-RT-W6 | 20.9 | 3.8 | 9.3 | 83.2 | 30 | 30 | 34 | 4.14 |
| 387004911 | ETX4-12-F1-3030-TA-W6 | 38.8 | 4.0 | 16.6 | 83.2 | 30 | 30 | | 3.2 |
| 387004915 | ETX4-12-F1-4040-TA-RT-W6 | 37.8 | 3.9 | 16.6 | 83.2 | 40 | 40 | | 4.8 |
| 387004924 | ETX4-12-F1-3030-10-W6 | 38.8 | 4.0 | 16.6 | 83.2 | 30 | 30 | | 3.2 |
| 387004936 | ETX4-12-F2-3030-TA-RT-W6 | 38.8 | 4.0 | 16.6 | 83.2 | 30 | 30 | 34 | 3.2 |
| 387004938 | ETX4-12-F2-4040-TA-RT-W6 | 37.3 | 3.8 | 16.6 | 83.2 | 40 | 40 | 44 | 4.14 |
| 387004949 | ETX5-6-F1-2040-TA-RT-W6 | 25.1 | 5.2 | 8.2 | 83.2 | 20 | 40 | | 3.6 |
| 387004943 | ETX6-3-F1-2020-TA-RT-W6 | 14.5 | 6.1 | 4.1 | 83.2 | 20 | 20 | | 3.2 |
| 387004966 | ETX6-7-F2-3030-TA-RT-W6 | 33.2 | 6.1 | 9.3 | 83.2 | 30 | 30 | 34 | 3.81 |
| 387004917 | ETX6-12-F1-4040-TA-RT-W6 | 59.4 | 6.1 | 16.6 | 83.2 | 40 | 40 | | 3.81 |
| 387004947 | ETX6-12-F1-3030-TA-W6 | 59.4 | 6.1 | 16.6 | 83.2 | 30 | 30 | | 3.2 |
| 387004937 | ETX6-19-F1-4040-TA-RT-W6 | 91.6 | 6.0 | 26.0 | 83.2 | 40 | 40 | | 3.91 |
| 387004957 | ETX7-3-F1-2020-TA-RT-W6 | 18.5 | 7.7 | 4.1 | 83.2 | 20 | 20 | | 3.51 |
| 387004951 | ETX7-16-F1-4040-TA-RT-W6 | 84.1 | 6.8 | 21.0 | 83.2 | 40 | 40 | | 3.2 |
| 387004950 | ETX8-7-F1-3030-TA-RT-W6 | 47.0 | 8.6 | 9.3 | 83.2 | 30 | 30 | | 3.33 |
| 387004955 | ETX8-7-F2-3030-TA-RT-W6 | 47.0 | 8.6 | 9.3 | 83.2 | 30 | 30 | 34 | 3.33 |
| 387004922 | ETX8-12-F1-4040-TA-RT-W6 | 84 | 8.6 | 16.6 | 83.2 | 40 | 40 | | 3.33 |
| 387004934 | ETX8-12-F2-2525-TA-RT-W6 | 77.8 | 7.9 | 16.6 | 83.2 | 24.6 | 24.3 | 26.9 | 1.96 |
| 387004932 | ETX8-28-F2-5252-TA-RT-W6 | 190.5 | 8.6 | 37.6 | 83.2 | 52 | 52 | 56 | 3.81 |
| 387004939 | ETX9-3-F2-2525-TA-W6 | 23.6 | 9.9 | 4.1 | 83.2 | 25.4 | 25.4 | 28.7 | 5 |
| 387004963 | ETX9-3-F1-3030-TA-RT-W6 | 22.1 | 9.2 | 4.1 | 83.2 | 30 | 30 | | 5.59 |
| 387004944 | ETX11-12-F1-4040-TA-RT-W6 | 109 | 11.0 | 16.6 | 83.2 | 40 | 40 | | 3.5 |
| 387004931 | ETX11-12-F2-3030-TA-RT-W6 | 108.2 | 11.0 | 16.6 | 83.2 | 30 | 30 | 34 | 2.41 |
| 387004958 | ETX14-3-F1-3030-TA-RT-W6 | 33.8 | 14.1 | 4.1 | 83.2 | 30 | 30 | | 4.57 |
| 387006544 | ETX14-12-F1-6262-TA-W6 | 138 | 14.1 | 16.6 | 83.2 | 62 | 62 | | 4.57 |
| 387004927 | ETX15-12-F2-4040-TA-RT-W6 | 142.8 | 14.6 | 16.6 | 83.2 | 40 | 40 | 44 | 2.84 |
| 387004919 | ETX15-24-F2-5252-TA-W6 | 269.4 | 14.5 | 31.5 | 83.2 | 52 | 52 | 56 | 3.3 |
| 387004921 | ETX15-28-F2-5252-TA-RT-W6 | 321.9 | 14.5 | 37.6 | 83.2 | 52 | 52 | 56 | 3.3 |
| 387004930 | ETX25-12-F1-6262-TA-W6 | 245.1 | 25.0 | 16.6 | 83.2 | 62 | 62 | | 4.1 |

PolarTEC™ PT Series

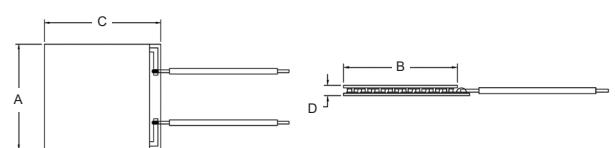
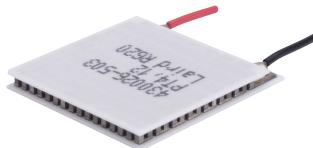


- Porch style ceramic for improved lead attachment.
- Standard 4, 6 and 8 Amp configurations available.
- Designed for high volume production runs in consumer, food and beverage markets.

| MFG PART NUMBER | DESCRIPTION | QMAX ⁽²⁾ (WATTS) | IMAX (AMPS) | VMAX (VOLTS) | ΔTMAX (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽³⁾ (MM) |
|-----------------|----------------------|-----------------------------|-------------|--------------|------------|------------|------------|------------|---------------------------|
| 430097-507 | PT4-7-F2-3030-TA-W6 | 17.8 | 3.8 | 7.8 | 70.5 | 30 | 30 | 34 | 4.1 |
| 430027-501 | PT6-7-F2-3030-TA-W6 | 28.3 | 6.1 | 7.8 | 70.5 | 30 | 30 | 34 | 3.8 |
| 430026-503 | PT4-12-F2-3030-TA-W6 | 33 | 4 | 13.9 | 70.5 | 30 | 30 | 34 | 3.2 |
| 430023-507 | PT4-12-F2-4040-TA-W6 | 31.8 | 3.8 | 13.9 | 70.5 | 40 | 40 | 44 | 4.1 |
| 430052-501 | PT6-12-F2-4040-TA-W6 | 50.6 | 6.1 | 13.9 | 70.5 | 40 | 40 | 44 | 3.8 |
| 7050045-502 | PT8-12-F2-4040-TA-W6 | 71 | 8.6 | 13.9 | 70.5 | 40 | 40 | 44 | 3.3 |

Notes: 1) QMax rated value at ΔT = 0°C, Imax and Vmax, Th = 50°C 2) QMax rated value at ΔT = 0°C, Imax and Vmax, Th = 27°C 3) Thickness for non-metallized versions only.



CP Series

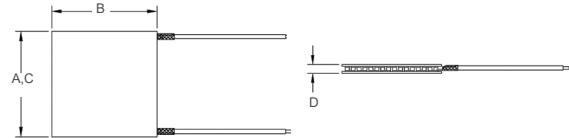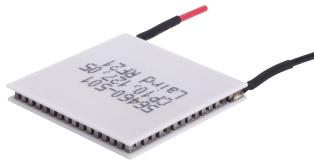

- Designed for high current, large heat pumping applications.
- Wide product breadth that covers many form factors, input power requirements and heat pumping capacities.
- Ideal for medical diagnostics, analytical instrumentation, photonics laser systems and battery cooling.

| MFG PART NUMBER | DESCRIPTION | QMAX ⁽¹⁾ (WATTS) | IMAX (AMPS) | VMAX (VOLTS) | ΔTMAX (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽²⁾ (MM) |
|-----------------|-------------------------|--------------------------------|----------------|-----------------|---------------|---------------|---------------|---------------|------------------------------|
| 62910-510 | CP08-127-05-L1-W4.5 | 21.7 | 2.6 | 13.9 | 70.5 | 25 | 25 | 25 | 3.1 |
| 66195-505 | CP08-127-06-L1-W4.5 | 17.5 | 2.1 | 13.9 | 70.5 | 25 | 25 | 25 | 3.4 |
| 71035-505 | CP08-31-06-L1-W4.5 | 4.3 | 2.1 | 3.4 | 70.5 | 12 | 12 | 12 | 3.4 |
| 71036-505 | CP08-63-06-L1-W4.5 | 8.7 | 2.1 | 6.9 | 70.5 | 12 | 25 | 12 | 3.4 |
| 71212-502 | CP085-127-06-L1-W4.5 | 19.2 | 2.3 | 13.9 | 70.5 | 30 | 30 | 30 | 3.6 |
| 56460-501 | CP10-127-05-L1-W4.5 | 33 | 4 | 13.9 | 70.5 | 30 | 30 | 30 | 3.2 |
| 56310-503 | CP10-127-06-L1-W4.5 | 25.5 | 3.1 | 13.9 | 70.5 | 30 | 30 | 30 | 3.6 |
| 71012-506 | CP10-254-06-L1-W4.5 | 51 | 3.1 | 27.7 | 70.5 | 60 | 30 | 30 | 3.6 |
| 430801-504 | CP10-31-05-L1-W4.5 | 8.1 | 4.0 | 3.4 | 70.5 | 15 | 15 | 15 | 3.2 |
| 63604-511 | CP10-31-08-L1-W4.5 | 5.1 | 2.5 | 3.4 | 70.5 | 15 | 15 | 15 | 4 |
| 56430-501 | CP10-63-05-L1-W4.5 | 16.4 | 4.0 | 6.9 | 70.5 | 15 | 30 | 15 | 3.2 |
| 43280-503 | CP10-63-06-L1-W4.5 | 12.6 | 3.1 | 6.9 | 70.5 | 15 | 30 | | 3.58 |
| 63595-501 | CP10-63-08-L1-W4.5 | 10.4 | 2.5 | 6.9 | 70.5 | 15 | 30 | | 3.9 |
| 44440-501 | CP10-71-05-L1-W4.5 | 18.5 | 4.0 | 7.8 | 70.5 | 23 | 23 | 23 | 3.2 |
| 430436-504 | CP10-71-06-L1-W4.5 | 14.2 | 3.1 | 7.8 | 70.5 | 23 | 23 | 23 | 3.6 |
| 430922-501 | CP10-131-04-L1-TOW-W4.5 | 52.1 | 6.1 | 14.3 | 70.5 | 40 | 23 | | 3 |
| 430848-502 | CP12-161-04-L1-W4.5 | 76.3 | 7.3 | 17.6 | 70.5 | 40 | 40 | 40 | 3.3 |
| 430848-504 | CP12-161-06-L1-W4.5 | 47.7 | 4.5 | 17.6 | 70.5 | 40 | 40 | 40 | 3.6 |
| 56910-502 | CP14-127-045-L1-W4.5 | 71.3 | 8.6 | 13.9 | 70.5 | 40 | 40 | 40 | 3.3 |
| 56760-505 | CP14-127-06-L1-W4.5 | 49.3 | 6 | 13.9 | 70.5 | 40 | 40 | 40 | 3.8 |
| 56610-502 | CP14-127-10-L1-W4.5 | 32.2 | 3.9 | 13.9 | 70.5 | 40 | 40 | 40 | 4.7 |
| 44530-501 | CP14-17-10-L1-W4.5 | 4.3 | 3.9 | 1.9 | 70.5 | 15 | 15 | 15 | 4.7 |
| 430875-503 | CP14-199-045-L1-W4.5 | 111.8 | 8.6 | 21.7 | 70.5 | 40 | 40 | 40 | 3.3 |
| 430874-503 | CP14-199-06-L1-W4.5 | 77.3 | 6.0 | 21.7 | 70.5 | 40 | 40 | 40 | 3.81 |
| 56550-501 | CP14-31-10-L1-W4.5 | 7.9 | 3.9 | 3.4 | 70.5 | 20 | 20 | 20 | 4.7 |
| 56860-501 | CP14-35-045-L1-W4.5 | 19.7 | 8.6 | 3.8 | 70.5 | 15 | 30 | 15 | 3.3 |
| 56890-503 | CP14-71-045-L1-W4.5 | 39.9 | 8.6 | 7.8 | 70.5 | 30 | 30 | 30 | 3.3 |
| 430705-503 | CP14-71-06-L1-W4.5 | 27.6 | 6.0 | 7.8 | 70.5 | 30 | 30 | 30 | 3.8 |
| 56590-502 | CP14-71-10-L1-W4.5 | 18.0 | 3.9 | 7.8 | 70.5 | 30 | 30 | 30 | 4.7 |
| 66100-501 | CP2-127-06-L1-W4.5 | 117.8 | 14.2 | 13.9 | 70.5 | 62 | 62 | 62 | 4.6 |
| 64979-501 | CP2-127-10-L1-W4.5 | 76.9 | 9.3 | 13.9 | 70.5 | 62 | 62 | 62 | 5.6 |
| 57125-501 | CP2-31-06-L1-W4.5 | 28.8 | 14.2 | 3.4 | 70.5 | 30 | 30 | 30 | 4.6 |
| 56995-501 | CP2-31-10-L1-W4.5 | 18.8 | 9.3 | 3.4 | 70.5 | 30 | 30 | 30 | 5.6 |
| 57180-501 | CP2-71-06-L1-W4.5 | 65.9 | 14.2 | 7.8 | 70.5 | 44 | 44 | 44 | 4.6 |
| 57040-500 | CP2-71-10-L1-W4.5 | 43.0 | 9.3 | 7.8 | 70.5 | 44 | 44 | 44 | 4.6 |

Annular Series

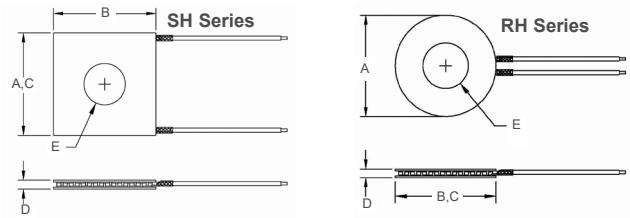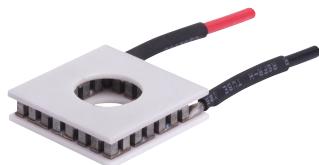

- Features center hole for transmission of light, wires, probes or mounting hardware.
- Round or square hole configurations available.
- Rapid prototyping available to accommodate unique shape requirements.

| MFG PART NUMBER | DESCRIPTION | QMAX ⁽¹⁾ (WATTS) | IMAX (AMPS) | VMAX (VOLTS) | ΔTMAX (°C) | DIM A (MM) | DIM B (MM) | DIM C (MM) | DIM D ⁽²⁾ (MM) | DIM E (MM) |
|-----------------|----------------------|--------------------------------|----------------|-----------------|---------------|---------------|---------------|---------------|------------------------------|---------------|
| 71062-514 | RH14-14-10-L1-W4.5 | 3.5 | 3.9 | 1.5 | 70.5 | 26 | 26 | 26 | 4.7 | 14 |
| 71063-505 | RH14-14-06-L1-W4.5 | 5.4 | 6 | 1.5 | 70.5 | 26 | 26 | 26 | 3.8 | 14 |
| 66156-505 | RH14-32-06-L1-W4.5 | 12.4 | 6 | 3.5 | 70.5 | 44 | 55 | 55 | 3.8 | 27 |
| 430058-508 | SH08-28-05-L1-W4.5 | 4.8 | 2.6 | 3.1 | 70.5 | 14.7 | 10.3 | 14.7 | 3.1 | 4.4 |
| 430511-504 | SH10-23-06-L1-W4.5 | 4.6 | 3.1 | 2.5 | 70.5 | 15 | 15 | 15 | 3.6 | 7.2 |
| 71049-501 | SH10-95-06-L-W4.5 | 19.1 | 3.1 | 10.4 | 70.5 | 30 | 30 | 30 | 3.6 | 14.5 |
| 430474-501 | SH10-125-05-L1-W4.5 | 32.5 | 4 | 13.7 | 70.5 | 30 | 30 | 30 | 3.2 | 3.6 |
| 71092-501 | SH14-15-06-L-W4.5 | 5.8 | 6 | 1.6 | 70.5 | 14 | 14 | 14 | 3.8 | 5.1 |
| 71061-504 | SH14-125-10-L1-W4.5 | 31.7 | 3.9 | 13.7 | 70.5 | 40 | 40 | 40 | 4.7 | 4.7 |
| 430478-502 | SH14-125-06-L1-W4.5 | 48.5 | 6 | 13.7 | 70.5 | 40 | 40 | 40 | 3.8 | 4.7 |
| 71020-505 | SH14-125-045-L1-W4.5 | 70.3 | 8.6 | 13.7 | 70.5 | 40 | 40 | 40 | 3.3 | 4.7 |

Notes: 1) QMax rated value at ΔT = 0°C, Imax and Vmax, Th = 27°C 2) Thickness for non-metallized versions only.

Finishing Options

| SURFACE FINISH OPTIONS | CP | OPTOTEC OTX/HTX | HITEMP ETX | POWER CYCLING PCX | ULTRATEC UTX | MULTISTAGE | ANNULAR SH/RH |
|---|----|-----------------|------------|-------------------|--------------|------------|---------------|
| Metallized Hot/Cold Surface | MM | 00 | - | - | 00 | 00 | MM |
| Non-Metallized Hot and/or Cold face | L | 11 | 11 | 11 | 11 | 11 | L |
| Pre-tinning Hot and/or Cold face with 118°C InSn Solder | TT | 22 | - | - | 22 | 22 | TT |
| Pre-tinning Hot and/or Cold face with 138°C BiSn Solder | - | 33 | - | - | - | - | - |
| Au plating (Hot/Cold Surface) | - | GG | - | - | GG | - | - |

Example: CP10-127-05TL = Pre-tinned Hot Face (118°C InSn), Non-Metallized Cold Face. Note: Metallization and pretinning are not recommended for module sizes larger than 12 x 12 mm's. Consult datasheet for module thicknesses for each surface finishing option. Contact Laird Thermal Systems for finishing options for Multistage Modules.

| THICKNESS TOLERANCE OPTIONS | CP | OPTOTEC OTX/HTX | HITEMP ETX | POWER CYCLING PCX | ULTRATEC UTX | MULTISTAGE | ANNULAR SH/RH |
|-----------------------------|----|-----------------|------------|-------------------|--------------|------------|---------------|
| +/- 0.001" (0.025 mm) | L1 | TA | TA | TA | TA | - | TA |
| +/- 0.0005" (0.013 mm) | L2 | TB | TB | TB | TB | - | TB |

Example: CP10-127-05-L2 = thickness is 3.2 mm +/- 0.013 mm. Contact Laird Thermal Systems for thickness options for Multistage Modules.

| MOISTURE PROTECTION OPTIONS | CP | OPTOTEC OTX/HTX | HITEMP ETX | POWER CYCLING PCX | ULTRATEC UTX | MULTISTAGE | ANNULAR SH/RH |
|---|----|-----------------|------------|-------------------|--------------|------------|---------------|
| RTV perimeter seal, Color: Translucent or White | RT | RT | RT | RT | RT | RT | RT |
| Epoxy perimeter seal, Color: Black | EP | EP | EP | EP | EP | EP | EP |

Example: CP10-127-05-L2-RT = RTV silicone perimeter seal Silicone (RTV) is an all purpose sealant that exhibits good sealing characteristics and retains its elastomeric properties over a wide temperature range, -60 to 200°C. The sealant is non-corrosive to many chemicals and exhibits good electrical properties with low thermal conductivity. Epoxy (EP) is an effective barrier to moisture that exhibits a useable temperature range of -40 to 130°C. When cured the material is completely uni-cellular and therefore the moisture absorption is negligible. The material exhibits a low dielectric constant, low coefficient of thermal expansion and low shrinkage.

| WIRE OPTIONS | CP | OPTOTEC OTX/HTX | HITEMP ETX | POWER CYCLING PCX | ULTRATEC UTX | MULTISTAGE | CENTER HOLE SH/RH |
|--|----|-----------------|------------|-------------------|--------------|------------|-------------------|
| Custom lead length # in inches, (S denotes special requirement) | W# | W# | W# | W# | W# | W# | W# |

Example: CP10-127-05-L2-W8 = Wire length is 8" (203 mm). Reference datasheet for standard lead length, wire type and insulation sleeving. Consult with Laird Thermal Systems for wire bondable posts or thru hole mount.

Thermal Wizard

The Thermal Wizard is an online tool that allows engineers to specify a given set of input variables based on application attributes and model the performance of the thermoelectric cooler prior to trial. The tool contains several application examples and an active datasheet that simulates how the thermoelectric cooler will function under a specific set of operating conditions. Available only online, the Thermal Wizard is accessible from the Laird Thermal Systems website at

<https://www.lairdthermal.com/thermal-wizard-peltier-home>

Need to calculate your Cooling Requirement? Use the Thermal Wizard Qc Calculators



DEVICE COOLING CALCULATOR



ENCLOSURE COOLING CALCULATOR




AIR COOLING CALCULATOR



LIQUID COOLING CALCULATOR

Know your Cooling Requirement (Qc)? Move a slider to the desired Qc and click SEARCH

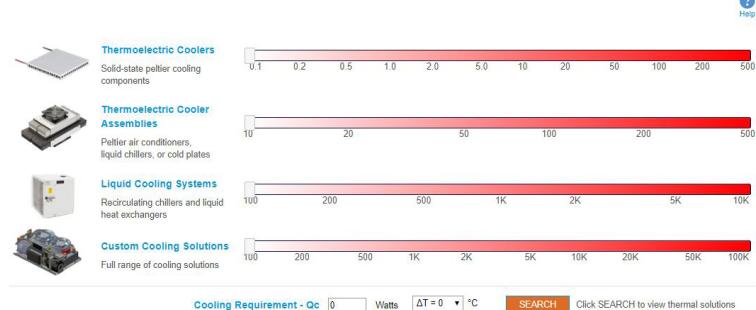

THERMAL SYSTEMS

LTS-CAT-THERMOELECTRIC-COOLERS 071421

Any information furnished by Laird and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Laird. All specifications are subject to change without notice. Laird assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Laird products are sold subject to the Laird Terms and Conditions of sale (including Laird's limited warranty) in effect from time to time, a copy of which will be furnished upon request.

Trademarks

© Copyright 2019-2021 Laird Thermal Systems, Inc. All rights reserved. Laird™, the Laird Ring Logo, and Laird Thermal Systems™ are trademarks or registered trademarks of Laird Limited or its subsidiaries. UltraTEC™, OptoTEC™ and PolarTEC™ are trademarks of Laird Thermal Systems, Inc. All other marks are owned by their respective owners.

